

Nothing but **HEAVY DUTY.**™



2020/21

ACCESSORIES AND HAND TOOLS CATALOGUE





milwaukeetool.eu



| DRILLING AND CHISELLING | |
|--|-------------|
| Chisels | |
| HEX 21 mm/ 28 mm/ 30 mm | 26-29 |
| SDS-Max SDS-Plus | 25 23-24 |
| Diamond Driling | 23-24 |
| 1 1/4" UNC / 1/2" G - Wet Diamond | |
| Drilling Core Drills | 76-78 |
| 1 1/4" UNC / M16 - Dry Diamond Drilling Core Drills | 79-83 |
| 1/4" Wet/Dry Diamond Drills | 75 |
| M14 Dry Diamond Drills | 74 |
| Wet/Dry Diamond Holesaws | 75 |
| Drill Bits : Concrete / Masonry | |
| ROUND SHANK - CONCRETE/MASONRY | 30-32 |
| SDS-Max - Other | 17, 19-22 |
| SDS-Max 4 Cutter | 15-16 |
| SDS-Max Core Cutters/Tunnel Bits | 18-19 |
| SDS-Plus - Other | 12-13 |
| SDS-Plus 2 Cutter (M2) | 8-11 |
| SDS-Plus 4 Cutter (MX4) | 4-7 |
| SDS-Plus Core Cutters | 14 |
| SDS-Plus Extensions | 13 |
| Drill Bits: Metal | |
| Annular Cutters | 59-61 |
| HSS-G | 47-52 |
| HSS-G Red Cobalt | 54-55 |
| HSS-G Ti Red Hex - SHOCKWAVE™ IMPACT DUTY | 53 |
| HSS-R | 42-46 |
| Step Drills | 56-58 |
| Drill Bits: Other | |
| Glass & Tile | 32 |
| Multi Material | 32 |
| Drill Bits: Wood | |
| Auger Bits | 35 |
| Auger Bits - SHOCKWAVE™ IMPACT DUTY | 33 |
| Cable Bits | 41 |
| Flat Bits | 40 |
| Forstner Bits | 36 |
| Lip & Spur Bits | 39 |
| | 38 |
| Selfeed Bits SPEED FEED™ Bits | 41 |
| SWITCHBLADETM Selfeed Bits - SHOCKWAVETM IMPACT DUTY | 37 |
| Drill Bits: Other | |
| Glass & Tile | 32 |
| Multi Material | 32 |
| Holesaws | 32 |
| | e c |
| Adjustable Holesaw | 69 71 |
| BIG HAWG TM Multi Material | 68 |
| Contractor Bi-Metal | |
| HCS PVC Holesaws | 72 |
| HOLE DOZER™ - Bi-Metal | 65-67 |
| HOLE DOZER™ - Carbide | 62-64 |
| Holesaws - SHOCKWAVE™ IMPACT DUTY | 73 |

| DRILLING AND CHISELLING | |
|---|-------------|
| Chisels | |
| HEX 21 mm/ 28 mm/ 30 mm | 26-29 |
| SDS-Max | 25 |
| SDS-Plus | 23-24 |
| Diamond Driling | |
| 1 1/4" UNC / 1/2" G - Wet Diamond Drilling Core Drills | 76-78 |
| 1 1/4" UNC / M16 - Dry Diamond Drilling Core Drills | 79-83 |
| 1/4" Wet/Dry Diamond Drills | 75 |
| M14 Dry Diamond Drills | 74 |
| Wet/Dry Diamond Holesaws | 75 |
| Drill Bits : Concrete / Masonry | |
| ROUND SHANK - CONCRETE/MASONRY | 30-32 |
| SDS-Max - Other | 17, 19-22 |
| SDS-Max 4 Cutter | 15-16 |
| SDS-Max Core Cutters/Tunnel Bits | 18-19 |
| SDS-Plus - Other | 12-13 |
| SDS-Plus 2 Cutter (M2) | 8-11 |
| SDS-Plus 4 Cutter (MX4) | 4-7 |
| SDS-Plus Core Cutters SDS-Plus Extensions | 14 13 |
| Drill Bits: Metal | 13 |
| Annular Cutters | 59-61 |
| HSS-G | 47-52 |
| HSS-G Red Cobalt | 54-55 |
| HSS-G Ti Red Hex - SHOCKWAVE™ IMPACT DUTY | 53 |
| HSS-R | 42-46 |
| Step Drills | 56-58 |
| Drill Bits: Other | |
| Glass & Tile | 32 |
| Multi Material | 32 |
| Drill Bits: Wood | |
| Auger Bits | 35 |
| Auger Bits - SHOCKWAVE™ IMPACT DUTY | 33 |
| Cable Bits | 41 |
| Flat Bits | 40 |
| Forstner Bits | 36 |
| Lip & Spur Bits | 39 |
| Selfeed Bits | 38 |
| SPEED FEED™ Bits | 41 |
| SWITCHBLADE™ Selfeed Bits - SHOCKWAVE™ IMPACT DUTY | 37 |
| Drill Bits: Other | |
| Glass & Tile | 32 |
| Multi Material | 32 |
| Holesaws | |
| Adjustable Holesaw | 69 |
| BIG HAWG™ Multi Material | 71 |
| Contractor Bi-Metal | 68 |
| HCS PVC Holesaws | 72 65 67 |
| HOLE DOZER™ - Bi-Metal HOLE DOZER™ - Carbide | 65-67 |
| Holocowie ShockWayetM IMPACT DITY | 62-64 |

| GIASS & THE | |
|-----------------------------------|------|
| Multi Material | |
| Holesaws | |
| Adjustable Holesaw | |
| BIG HAWG™ Multi Material | |
| Contractor Bi-Metal | |
| HCS PVC Holesaws | |
| HOLE DOZER™ - Bi-Metal | 65-0 |
| HOLE DOZER™ - Carbide | 62- |
| Holesaws - SHOCKWAVE™ IMPACT DUTY | |
| | |
| | |

FASTENING

| it Holders - SHOCKWAVE™ | IMPACT DUTY | 90-91 |
|-------------------------|-------------|-------|
| | | |

| Nails and Staples | 99 |
|--|--------|
| Screwdriving Attachments | 92, 94 |
| Screwdriving Bits | 93-94 |
| Screwdriving Bits - SHOCKWAVE™ IMPACT DUTY | 84-90 |
| Sockets & Adaptors - SHOCKWAVE™ IMPACT DUTY | 95-98 |

SAWING, CUTTING AND GRINDING

CUTTING AND GRINDING

| Coated Adrasives | |
|--------------------------------------|---------|
| Belts | 141 |
| Orbital/ Random Orbital Delta Sheets | 139-140 |
| Diamond Technology | |
| Diamond Blades | 127-132 |
| Diamond Grinding Cup Wheels | 133 |
| Grinding | |
| Fixtec Nuts | 138 |
| Flap Discs | 137 |
| Metal Cutting Grinding Discs | 135-136 |
| SAWING | |
| Bandsaw Blades | 126 |
| Circular Saw Blades | |
| Metal | 129 |
| Wood / Alu | 123-124 |
| HACKZALL™ Blades | 113 |
| Jigsaw Blades | |
| Metal | 118-119 |
| Special Applications | 119-120 |
| Wood | 114-117 |
| Multitool Accessories | 121 |
| SAWZALL™ Blades | |
| Bi-Metal: Demolition / Wood | 104 |
| Bi-Metal: Metal | 106-109 |
| Bi-Metal: Multimaterial | 108 |
| CARBIDE TECHNOLOGY : WOOD / METAL | 102-103 |
| Special Application Blades & Sets | 110-112 |
| | |

TOOL SYSTEM ATTACHMENTS

| Angle Grinders | 149-150 |
|-------------------------------|---------|
| Bandsaws | 156 |
| Batteries | 176 |
| Biscuit Joiners | 157 |
| Cable Cutters | 167 |
| Caulk Guns | 170 |
| Chargers | 175 |
| Chucks | 146-148 |
| Circular Saws | 156 |
| Crimpers | 161-164 |
| Diamond Wet Drilling | 78 |
| Drain Cleaning | 168-169 |
| Dust Absorption Solutions | 173-174 |
| Electrical Test and Measuring | 172 |
| Expansion Tools | 165 |
| Fish Tapes M18 FUEL™ | 171 |
| HEATED JACKETS | 172 |
| Hydraulic Pump | 166 |
| Impact Wrenches | 148 |
| | |

| Knockout Punch | 16 |
|-------------------------|--------|
| Nibblers | 15 |
| Outdoor Products | 15 |
| Planers | 15 |
| Plate Shears | 15 |
| Polishers | 152-15 |
| Press Tools | 159-16 |
| Rotary hammers | 142-14 |
| Routers | 15 |
| Sanders | 154-15 |
| Screwdrivers | 145-14 |
| Straight Die Grinders | 15 |
| Wall Chasers | 13 |
| | |

HAND TOOLS

| Curved Hammer | 221 |
|----------------------------------|---------|
| Cutting | |
| Bolt Cutters | 203 |
| Cable Cutter | 202 |
| Knives and Blades | 194-197 |
| Metal Snips | 200 |
| Sawing | 198-199 |
| Scissors | 199 |
| Tubing Cutters | 200-202 |
| Fish Tape | 221 |
| Gripping and Fastening | |
| HOLLOWCORE™ Magnetic Nut Drivers | 220 |
| Pliers | 209-212 |
| Ratchets | 217-218 |
| Screwdrivers | 208 |
| Spanners | 215-216 |
| TORQUE LOCK™ Clamps | 214 |
| TORQUE LOCK™ Pliers | 213 |
| Wrenches | 218-220 |
| Hook & Pick Set | 221 |
| Meauring and Marking | |
| Chalk Reel | 191 |
| Folding Rules | 182-183 |
| INKZALL™ Markers | 192-193 |
| Levels | 184 |
| Long Tapes | 183 |
| Short Tapes | 178-182 |
| Pry Bars | 221 |
| Storage and Safety Equipment | |
| Backpacks | 237-238 |
| Gloves | 224-227 |
| Heavy Duty Boxes | 240 |
| PACKOUT™ Storage | 230-236 |
| Safety Glasses | 228-229 |
| Tool Lanyards | 222-223 |
| Work belts | 239 |
| | |
| | |

MERCHANDISING SOLUTIONS

| 1m Rows | 241 |
|-----------|-----|
| Red Racks | 257 |








PREMUM MAXIMUM DURABILITY IN REINFORCED CONCRETE



20% MORE HOLES PER CHARGE



*vs. 2 cutter drill bit in reinforced concrete





FASTER

4 BREAKER POINTS

*vs. previous generation



VARIABLE FLUTE DESIGN



WELDED SOLID CARBIDE TIP

Ø 5.0 - 10.0mm



ENHANCEDREBAR GUARDS

DRILLING AND CHISELLING



SDS-Plus MX4 drill bits - 4 cut



Symmetrical 4 cutter geometry (4x90°). Perfect round holes for optimal anchor fitting. 4 flute geometry. The high volume 4 flute geometry ensures the optimum removal of dust and debris. Centering tip for easy spot drilling with pinpoint accuracy.
Welded solid carbide tip on Ø 5-10 mm. Allows for wider flute entrance leading to increased speed. More


carbide leads to a higher durability of the tip and higher lifetime.


4 breaker points pulverize material more efficiently for faster drilling.

Enhanced rebar guards for an improved resistance when hitting rebar.

New variable flute design. Thin flute at the tip for maximum debris extraction, higher speed and less friciton. Thick flute at the base for higher stability and reduced bit breakage. Up to 20% more holes per battery







| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pre-drill | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|--------------------------|-----------|---------------|------------------------|----------------|---------------|
| 5 | 115 | 50 | | 1 | 1 | 4932352007 | 4002395366644 |
| 5 | 165 | 100 | | 1 | 1 | 4932352008 | 4002395368891 |
| 5.5 | 115 | 50 | | 1 | 1 | 4932352009 | 4002395368907 |
| 5.5 | 165 | 100 | | 1 | 1 | 4932352010 | 4002395368914 |
| 6 | 115 | 50 | | 1 | 1 | 4932352011 | 4002395368921 |
| 6 | 165 | 100 | | 1 | 1 | 4932352012 | 4002395368938 |
| 6 | 215 | 150 | | 1 | 1 | 4932352013 | 4002395366705 |
| 6 | 265 | 200 | | 1 | 1 | 4932352014 | 4002395366712 |
| 6 | 315 | 250 | | 1 | 1 | 4932352015 | 4002395366729 |
| 6.5 | 165 | 100 | | 1 | 1 | 4932430146 | 4002395378074 |
| 6.5 | 215 | 150 | | 1 | 1 | 4932352016 | 4002395366736 |
| 6.5 | 265 | 200 | | 1 | 1 | 4932352017 | 4002395366743 |
| 6.5 | 315 | 250 | | 1 | 1 | 4932352018 | 4002395366750 |
| 6.5 | 465 | 400 | | 1 | 1 | 4932464596 | 4058546225414 |
| 7 | 115 | 50 | | 1 | 1 | 4932352019 | 4002395366767 |
| 7 | 165 | 100 | | 1 | 1 | 4932352020 | 4002395366774 |
| 8 | 115 | 50 | | 1 | 1 | 4932352021 | 4002395366781 |
| 8 | 165 | 100 | | 1 | 1 | 4932352022 | 4002395366798 |
| 8 | 215 | 150 | | 1 | 1 | 4932352023 | 4002395366804 |
| 8 | 265 | 200 | | 1 | 1 | 4932352024 | 4002395366811 |
| 8 | 315 | 250 | | 1 | 1 | 4932352712 | 4002395373703 |
| 8 | 465 | 400 | V | 1 | 1 | 4932352713 | 4002395373710 |
| 9 | 165 | 100 | • | 1 | 1 | 4932352944 | 4002395376025 |
| 10 | 115 | 50 | | 1 | 1 | 4932352025 | 4002395366828 |
| 10 | 165 | 100 | | 1 | 1 | 4932352025 | 4002395366835 |
| | 215 | | | 1 | 1 | | |
| 10 | | 150 | | • | • | 4932352027 | 4002395366842 |
| 10 | 265 | 200 | | 1 | 1 | 4932352028 | 4002395366859 |
| 10 | 315 | 250 | | 1 | 1 | 4932352029 | 4002395366866 |
| 10 | 455 | 390 | <i>V</i> | 1 | 1 | 4932352030 | 4002395366873 |
| 10 | 600 | 540 | V | 1 | 1 | 4932352945 | 4002395376032 |
| 10 | 1000 | 940 | ~ | 1 | 1 | 4932352946 | 4002395376049 |
| 12 | 160 | 100 | | 1 | 1 | 4932352031 | 4002395366880 |
| 12 | 210 | 150 | | 1 | 1 | 4932352032 | 4002395366897 |
| 12 | 260 | 200 | | 1 | 1 | 4932352033 | 4002395366903 |
| 12 | 310 | 250 | | 1 | 1 | 4932352034 | 4002395366910 |
| 12 | 450 | 400 | V | 1 | 1 | 4932352035 | 4002395366927 |
| 12 | 600 | 540 | ~ | 1 | 1 | 4932352947 | 4002395376056 |
| 12 | 1000 | 940 | V | 1 | 1 | 4932352948 | 4002395376063 |
| 14 | 160 | 100 | | 1 | 1 | 4932352036 | 4002395366934 |
| 14 | 210 | 150 | | 1 | 1 | 4932352037 | 4002395366941 |
| 14 | 260 | 200 | | 1 | 1 | 4932352949 | 4002395376070 |
| 14 | 310 | 250 | | 1 | 1 | 4932352038 | 4002395366958 |
| 14 | 450 | 400 | ~ | 1 | 1 | 4932352039 | 4002395366965 |
| 14 | 600 | 540 | V | 1 | 1 | 4932352950 | 4002395376087 |
| 14 | 1000 | 940 | ~ | 1 | 1 | 4932352951 | 4002395376094 |
| 15 | 160 | 100 | | 1 | 1 | 4932430725 | 4002395383863 |
| 15 | 260 | 200 | | 1 | 1 | 4932352952 | 4002395376100 |
| 16 | 160 | 100 | | 1 | 1 | 4932430726 | 4002395383870 |
| 16 | 210 | 150 | | 1 | 1 | 4932352953 | 4002395376117 |
| 16 | 260 | 200 | V | 1 | 1 | 4932352819 | 4002395374779 |
| 16 | 310 | 250 | | 1 | 1 | 4932352954 | 4002395376124 |
| 16 | 450 | 400 | V | 1 | 1 | 4932352820 | 4002395374786 |





SDS-Plus MX4 drill bits - 4 cut

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pre-drill | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|--------------------------|-----------|---------------|---------------------|----------------|---------------|
| 16 | 600 | 540 | ~ | 1 | 1 | 4932352955 | 4002395376131 |
| 16 | 1000 | 940 | ~ | 1 | 1 | 4932352956 | 4002395376148 |
| 18 | 250 | 200 | | 1 | 1 | 4932356502 | 4002395320950 |
| 18 | 450 | 400 | v | 1 | 1 | 4932356503 | 4002395320967 |
| 20 | 250 | 200 | | 1 | 1 | 4932356504 | 4002395320974 |
| 20 | 450 | 400 | v | 1 | 1 | 4932356505 | 4002395320981 |
| 22 | 250 | 200 | | 1 | 1 | 4932399332 | 4002395359608 |
| 22 | 450 | 400 | v | 1 | 1 | 4932356506 | 4002395320998 |
| 24 | 250 | 200 | | 1 | 1 | 4932356507 | 4002395321001 |
| 24 | 450 | 400 | v | 1 | 1 | 4932356508 | 4002395321018 |
| 25 | 250 | 200 | | 1 | 1 | 4932399333 | 4002395359615 |
| 25 | 450 | 400 | ~ | 1 | 1 | 4932356509 | 4002395321025 |
| 28 | 250 | 200 | | 1 | 1 | 4932399334 | 4002395359622 |
| 28 | 450 | 400 | ~ | 1 | 1 | 4932356510 | 4002395321032 |
| 30 | 250 | 200 | | 1 | 1 | 4932399335 | 4002395359639 |
| 30 | 450 | 400 | V | 1 | 1 | 4932356511 | 4002395321049 |
| 32 | 450 | 400 | V | 1 | 1 | 4932399336 | 4002395359646 |

[✔] Pre drill with a short drill bit of the same diameter.

SDS-Plus MX4 drill bits - 4 cut / 10 pack

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|-----------------------|---------------|---------------------|----------------|---------------|
| 5 | 115 | 50 | 10 | 1 | 4932352040 | 4002395366972 |
| 5 | 165 | 100 | 10 | 1 | 4932471250 | 4058546288785 |
| 5.5 | 115 | 50 | 10 | 1 | 4932471251 | 4058546288792 |
| 5.5 | 165 | 100 | 10 | 1 | 4932352041 | 4002395366989 |
| 6 | 115 | 50 | 10 | 1 | 4932352042 | 4002395366996 |
| 6 | 165 | 100 | 10 | 1 | 4932352043 | 4002395367009 |
| 6 | 215 | 150 | 10 | 1 | 4932430234 | 4002395378951 |
| 6 | 265 | 200 | 10 | 1 | 4932471252 | 4058546288808 |
| 6.5 | 215 | 150 | 10 | 1 | 4932430235 | 4002395378968 |
| 6.5 | 265 | 200 | 10 | 1 | 4932459588 | 4058546027605 |
| 7 | 165 | 100 | 10 | 1 | 4932352044 | 4002395367016 |
| 8 | 115 | 50 | 10 | 1 | 4932352045 | 4002395367023 |
| 8 | 165 | 100 | 10 | 1 | 4932352046 | 4002395367030 |
| 8 | 215 | 150 | 10 | 1 | 4932464872 | 4058546228170 |
| 8 | 265 | 200 | 10 | 1 | 4932471253 | 4058546288815 |
| 10 | 165 | 100 | 10 | 1 | 4932352047 | 4002395367047 |
| 10 | 215 | 150 | 10 | 1 | 4932352048 | 4002395367054 |
| 10 | 265 | 200 | 10 | 1 | 4932471254 | 4058546288822 |
| 10 | 315 | 250 | 10 | 1 | 4932471255 | 4058546288839 |
| 12 | 160 | 100 | 10 | 1 | 4932352049 | 4002395367061 |
| 12 | 210 | 150 | 10 | 1 | 4932352050 | 4002395367078 |
| 12 | 260 | 200 | 10 | 1 | 4932471256 | 4058546288846 |
| 14 | 210 | 150 | 10 | 1 | 4932471257 | 4058546288853 |
| 16 | 260 | 200 | 10 | 1 | 4932471258 | 4058546288860 |

DRILLING AND CHISELLING



SDS-Plus MX4 drill bits - 4 cut / 50 pack

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|-----------------------|------------------|---------------------|----------------|---------------|
| 5.5 | 165 | 100 | 50 | 1 | 4932472234 | 4058546326302 |
| 6 | 115 | 50 | 50 | 1 | 4932430437 | 4002395380985 |
| 6 | 165 | 100 | 50 | 1 | 4932430438 | 4002395380992 |
| 6 | 215 | 150 | 50 | 1 | 4932430462 | 4002395381234 |
| 6.5 | 215 | 150 | 50 | 1 | 4932430463 | 4002395381241 |
| 6.5 | 265 | 200 | 50 | 1 | 4932459589 | 4058546027612 |
| 7 | 115 | 50 | 50 | 1 | 4932472154 | 4058546325503 |
| 7 | 165 | 100 | 50 | 1 | 4932472155 | 4058546325510 |
| 8 | 165 | 100 | 50 | 1 | 4932430439 | 4002395381005 |
| 8 | 215 | 150 | 50 | 1 | 4932430440 | 4002395381012 |
| 8 | 315 | 250 | 50 | 1 | 4932472156 | 4058546325527 |
| 8 | 465 | 400 | 50 | 1 | 4932472157 | 4058546325534 |
| 10 | 165 | 100 | 50 | 1 | 4932430441 | 4002395381029 |
| 10 | 215 | 150 | 50 | 1 | 4932430442 | 4002395381036 |
| 10 | 315 | 250 | 50 | 1 | 4932472158 | 4058546325541 |
| 10 | 455 | 390 | 50 | 1 | 4932472159 | 4058546325558 |
| 12 | 160 | 100 | 50 | 1 | 4932472160 | 4058546325565 |
| 12 | 210 | 150 | 50 | 1 | 4932430443 | 4002395381043 |
| 12 | 310 | 250 | 50 | 1 | 4932472161 | 4058546325572 |
| 12 | 450 | 400 | 50 | 1 | 4932472162 | 4058546325589 |

SDS-Plus MX4 drill bits - 4 cut / sets

| Description | Supplied in | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|---------------------|------------------|---------------------|----------------|---------------|
| SDS-Plus MX4 drill bit set (5pc) ① Ø 5 / 6 x 115 mm, Ø 6 / 8 x 165 mm, Ø 10 x 165 mm | Cutie plastic | 5 | 1 | 4932352833 | 4002395374915 |
| SDS-Plus MX4 drill bit set (5pc) 0 5.5 x 115 mm, 0 5.5 / 6 / 7 / 8 x 165 mm | Cutie plastic | 5 | 1 | 4932352835 | 4002395374939 |
| SDS-Plus MX4 drill bit set (7pc) ② Ø 5 / 6 / 8 x 115 mm, Ø 6 / 8 / 10 x 165 mm, Ø 12 x 160 mm | Plastic cassette | 7 | 1 | 4932451464 | 4002395162147 |
| Counter display 6 x 7 pc SDS-plus MX4 set (4932451464) | Plastic cassette | 6 | 1 | 4932352153 | 4002395368068 |







PROFESSIONAL PROFESSIONAL FAST DRILLING IN CONCRETE





25% **FASTER** 3 BREAKER POINTS

*vs. previous generation



VARIABLE FLUTE DESIGN



IDEAL IN CONCRETE DRILLING APPLICATIONS WITH CORDLESS HAMMERS


SDS-Plus M2 drill bits - 2 cut



Made in Germany.

FASTEST: New aggressive tip geometry with 3 chip breakers demolishes the concrete quicker and a tapered shoulder design minimises friction enabling the M2 drill bit to deliver faster drilling speed.

DURABILITY: Rebar chamfers on the tip prevent side tip damage when hitting metal reinforcement and a thicker core body ensures higher power transfer, lower vibrations and less flute breakages.





| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pre-drill | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|--------------------------|-----------|------------------|---------------------|----------------|----------------|
| 3 | 110 | 50 | | 1 | 1 | 4932352892 | 4002395375509 |
| 3.5 | 110 | 50 | | 1 | 1 | 4932373908 | 4002395353378 |
| 4 | 110 | 50 | | 1 | 1 | 4932339498 | 4002395304561 |
| 4 | 160 | 100 | | 1 | 1 | 4932399143 | 4002395357505 |
| 4.8 | 110 | 50 | | 1 | 1 | 4932352130 | 4002395367832 |
| 5 | 110 | 50 | | 1 | 1 | 4932307067 | 4002395308835 |
| 5 | 160 | 100 | | 1 | 1 | 4932399315 | 4002395359431 |
| 5 | 210 | 150 | | 1 | 1 | 4932399316 | 4002395359448 |
| 5.5 | 110 | 50 | | 1 | 1 | 4932339499 | 4002395304578 |
| 5.5 | 160 | 100 | | 1 | 1 | 4932340408 | 4002395311910 |
| 5.5 | 210 | 150 | | 1 | 1 | 4932399317 | 4002395359455 |
| 5.5 | 260 | 200 | | 1 | 1 | 4932399318 | 4002395359462 |
| 5.5 | 310 | 250 | | 1 | 1 | 4932399319 | 4002395359479 |
| 5.5 | 410 | 350 | | 1 | 1 | 4932399320 | 4002395359486 |
| 6 | 110 | 50 | | 1 | 1 | 4932307068 | 4002395308842 |
| 6 | 160 | 100 | | 1 | 1 | 4932307069 | 4002395308859 |
| 6 | 210 | 150 | | 1 | 1 | 4932373136 | 4002395346394 |
| 6 | 260 | 200 | | 1 | 1 | 4932353819 | 4002395320127 |
| 6 | 310 | 250 | | 1 | 1 | 4932399321 | 4002395359493 |
| 6 | 460 | 400 | V | 1 | 1 | 4932399322 | 4002395359509 |
| 6.5 | 110 | 50 | | 1 | 1 | 4932344292 | 4002395312276 |
| 6.5 | 160 | 100 | | 1 | 1 | 4932344293 | 4002395312269 |
| 6.5 | 210 | 150 | | 1 | 1 | 4932399147 | 4002395357574 |
| 6.5 | 260 | 200 | | 1 | 1 | 4932399148 | 4002395357581 |
| 6.5 | 310 | 260 | | 1 | 1 | 4932399323 | 4002395359516 |
| 7 | 110 | 50 | | 1 | 1 | 4932353820 | 4002395320134 |
| 7 | 160 | 100 | | 1 | 1 | 4932340409 | 4002395311927 |
| 7 | 210 | 150 | | 1 | 1 | 4932399222 | 4002395358366 |
| 7 | 250 | 200 | | 1 | 1 | 4932399324 | 4002395359523 |
| 8 | 110 | 50 | | 1 | 1 | 4932307070 | 4002395308866 |
| 8 | 160 | 100 | | 1 | 1 | 4932307071 | 4002395308873 |
| 8 | 210 | 150 | | 1 | 1 | 4932307072 | 4002395308880 |
| 8 | 260 | 200 | | 1 | 1 | 4932353821 | 4002395320141 |
| 8 | 310 | 250 | | 1 | 1 | 4932399325 | 4002395359530 |
| 8 | 400 | 350 | | 1 | 1 | 4932399326 | 4002395359547 |
| 8 | 460 | 400 | V | 1 | 1 | 4932367013 | 4002395336692 |
| 8 | 600 | 550 | ~ | 1 | 1 | 4932399327 | 4002395359554 |
| 8 | 1000 | 950 | V | 1 | 1 | 4932399328 | 4002395359561 |
| 9 | 160 | 100 | • | 1 | 1 | 4932353823 | 4002395320165 |
| 9 | 210 | 150 | | 1 | 1 | 4932353822 | 4002395320158 |
| 10 | 110 | 50 | | 1 | 1 | 4932340410 | 4002395311934 |
| 10 | 160 | 100 | | 1 | 1 | 4932307073 | 40023953011934 |
| 10 | 210 | 150 | | 1 | 1 | 4932307073 | 4002395308903 |
| 10 | 260 | 200 | | 1 | 1 | 4932344295 | 4002395312252 |
| 10 | 310 | 250 | | 1 | 1 | 4932353824 | 4002395312232 |
| 10 | | 400 | ,, | 1 | | 4932333024 | |
| | 450 | | <i>V</i> | | 1 | | 4002395312245 |
| 10 | 600 | 550 | V | 1 | 1 | 4932367014 | 4002395336708 |
| 10 | 1000 | 950 | V | 1 | 1 | 4932367015 | 4002395336715 |



SDS-Plus M2 drill bits - 2 cut



| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pre-drill | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|--------------------------|-----------|------------------|---------------------|----------------|---------------|
| 11 | 160 | 100 | | 1 | 1 | 4932367066 | 4002395336722 |
| 11 | 260 | 210 | | 1 | 1 | 4932399329 | 4002395359578 |
| 12 | 160 | 110 | | 1 | 1 | 4932307075 | 4002395308910 |
| 12 | 210 | 160 | | 1 | 1 | 4932307076 | 4002395308927 |
| 12 | 260 | 210 | | 1 | 1 | 4932344297 | 4002395312238 |
| 12 | 310 | 260 | | 1 | 1 | 4932353825 | 4002395320189 |
| 12 | 450 | 400 | ✓ | 1 | 1 | 4932307077 | 4002395308934 |
| 12 | 600 | 550 | ✓ | 1 | 1 | 4932367068 | 4002395336746 |
| 12 | 1000 | 950 | ✓ | 1 | 1 | 4932367017 | 4002395336760 |
| 13 | 160 | 110 | | 1 | 1 | 4932307946 | 4002395309054 |
| 13 | 260 | 210 | | 1 | 1 | 4932344298 | 4002395312221 |
| 14 | 160 | 110 | | 1 | 1 | 4932307078 | 4002395308941 |
| 14 | 210 | 160 | | 1 | 1 | 4932353826 | 4002395320196 |
| 14 | 260 | 210 | | 1 | 1 | 4932307079 | 4002395308958 |
| 14 | 310 | 260 | | 1 | 1 | 4932399330 | 4002395359585 |
| 14 | 450 | 400 | v | 1 | 1 | 4932307088 | 4002395309047 |
| 14 | 600 | 550 | ✓ | 1 | 1 | 4932367018 | 4002395336777 |
| 14 | 1000 | 950 | ✓ | 1 | 1 | 4932367019 | 4002395336784 |
| 15 | 160 | 110 | | 1 | 1 | 4932373910 | 4002395353392 |
| 15 | 260 | 210 | | 1 | 1 | 4932344300 | 4002395312207 |
| 16 | 160 | 110 | | 1 | 1 | 4932307080 | 4002395308965 |
| 16 | 210 | 160 | | 1 | 1 | 4932307081 | 4002395308972 |
| 16 | 260 | 210 | | 1 | 1 | 4932399331 | 4002395359592 |
| 16 | 310 | 260 | | 1 | 1 | 4932344301 | 4002395312191 |
| 16 | 450 | 400 | ~ | 1 | 1 | 4932307082 | 4002395308989 |
| 16 | 600 | 550 | v | 1 | 1 | 4932367069 | 4002395336791 |
| 16 | 1000 | 950 | v | 1 | 1 | 4932367021 | 4002395336814 |
| 18 | 200 | 150 | | 1 | 1 | 4932344303 | 4002395312177 |
| 18 | 250 | 200 | | 1 | 1 | 4932307083 | 4002395308996 |
| 18 | 300 | 250 | | 1 | 1 | 4932344304 | 4002395312160 |
| 18 | 450 | 400 | v | 1 | 1 | 4932340411 | 4002395311941 |
| 18 | 600 | 550 | v | 1 | 1 | 4932367022 | 4002395336821 |
| 18 | 1000 | 950 | v | 1 | 1 | 4932367024 | 4002395336845 |
| 20 | 200 | 150 | | 1 | 1 | 4932344305 | 4002395312153 |
| 20 | 250 | 200 | | 1 | 1 | 4932307084 | 4002395309009 |
| 20 | 300 | 250 | | 1 | 1 | 4932399027 | 4002395356126 |
| 20 | 450 | 400 | V | 1 | 1 | 4932307085 | 4002395309016 |
| 20 | 600 | 550 | v | 1 | 1 | 4932367025 | 4002395336876 |
| 20 | 1000 | 950 | v | 1 | 1 | 4932367026 | 4002395336883 |
| 22 | 250 | 200 | | 1 | 1 | 4932373911 | 4002395353408 |
| 22 | 450 | 400 | v | 1 | 1 | 4932344307 | 4002395312139 |
| 22 | 600 | 550 | V | 1 | 1 | 4932367027 | 4002395336890 |
| 22 | 1000 | 950 | · | 1 | 1 | 4932367029 | 4002395336913 |
| 24 | 250 | 200 | | 1 | 1 | 4932373922 | 4002395353521 |
| 24 | 450 | 400 | ~ | 1 | 1 | 4932307087 | 4002395309030 |
| 25 | 250 | 200 | | 1 | 1 | 4932344308 | 4002395312122 |
| 25 | 450 | 400 | ~ | 1 | 1 | 4932344309 | 4002395312115 |
| 25 | 1000 | 950 | · | 1 | 1 | 4932367030 | 4002395336975 |
| 26 | 250 | 200 | | 1 | 1 | 4932344310 | 4002395323814 |
| 26 | 450 | 400 | ~ | 1 | 1 | 4932344311 | 4002395312092 |
| | | | | | | | |

[✔] Pre drill with a short drill bit of the same diameter.

SDS-Plus M2 drill bits - 2 cut / counter displays



| | Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---|------------------|---------------------|----------------|---------------|
| 1 | Counter display 10 x 7 pc SDS-Plus M2 drill bit set (4932352339) | 7 | 1 | 4932352341 | 4002395370009 |
| 2 | Counter display 10 x 10 pc SDS-Plus M2 drill bit set (4932352340) | 10 | 1 | 4932352342 | 4002395370016 |





SDS-Plus M2 drill bits - 2 cut / 10 pack





| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|-----------------------|------------------|---------------------|----------------|---------------|
| 5 | 110 | 50 | 10 | 1 | 4932371702 | 4002395344017 |
| 5 | 160 | 100 | 10 | 1 | 4932352520 | 4002395371785 |
| 5.5 | 110 | 50 | 10 | 1 | 4932352521 | 4002395371792 |
| 5.5 | 160 | 100 | 10 | 1 | 4932371703 | 4002395344024 |
| 6 | 110 | 50 | 10 | 1 | 4932371704 | 4002395344031 |
| 6 | 160 | 100 | 10 | 1 | 4932371705 | 4002395344048 |
| 6 | 210 | 150 | 10 | 1 | 4932399337 | 4002395359653 |
| 6.5 | 160 | 100 | 10 | 1 | 4932399338 | 4002395359660 |
| 6.5 | 210 | 150 | 10 | 1 | 4932399339 | 4002395359677 |
| 6.5 | 260 | 200 | 10 | 1 | 4932399340 | 4002395359684 |
| 7 | 160 | 100 | 10 | 1 | 4932373225 | 4002395348619 |
| 8 | 160 | 100 | 10 | 1 | 4932371706 | 4002395344055 |
| 8 | 210 | 150 | 10 | 1 | 4932399341 | 4002395359691 |
| 10 | 110 | 50 | 10 | 1 | 4932352522 | 4002395371808 |
| 10 | 160 | 100 | 10 | 1 | 4932371708 | 4002395344079 |
| 10 | 210 | 150 | 10 | 1 | 4932371709 | 4002395344086 |
| 10 | 260 | 200 | 10 | 1 | 4932399342 | 4002395359707 |
| 12 | 160 | 100 | 10 | 1 | 4932399343 | 4002395359714 |
| 12 | 210 | 160 | 10 | 1 | 4932371710 | 4002395344093 |
| 12 | 260 | 210 | 10 | 1 | 4932399344 | 4002395359721 |
| 14 | 260 | 210 | 10 | 1 | 4932371711 | 4002395344109 |

SDS-Plus M2 drill bits - 2 cut / 50 pack



| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|-----------------------|------------------|---------------------|----------------|---------------|
| 5 | 110 | 50 | 50 | 1 | 4932399176 | 4002395357833 |
| 5.5 | 160 | 100 | 50 | 1 | 4932399177 | 4002395357840 |
| 6 | 110 | 50 | 50 | 1 | 4932399178 | 4002395357857 |
| 6 | 160 | 100 | 50 | 1 | 4932399179 | 4002395357864 |
| 7 | 160 | 110 | 50 | 1 | 4932399181 | 4002395357888 |
| 8 | 160 | 100 | 50 | 1 | 4932399182 | 4002395357895 |
| 8 | 210 | 150 | 50 | 1 | 4932399183 | 4002395357901 |
| 10 | 160 | 110 | 50 | 1 | 4932399345 | 4002395359738 |
| 10 | 210 | 150 | 50 | 1 | 4932399184 | 4002395357918 |
| 10 | 260 | 200 | 50 | 1 | 4932399185 | 4002395357925 |
| 12 | 210 | 160 | 50 | 1 | 4932399186 | 4002395357932 |

SDS-Plus M2 drill bits - 2 cut / cassettes





| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| SDS-Plus M2 drill bit set (5pc) | 5 | 1 | 4932352338 | 4002395369973 |
| Ø 5 / 6 x 110 mm and Ø 6 / 8 / 10 x 160 mm | | | | |
| SDS-Plus M2 drill bit set (5pc) | 5 | 1 | 4932352834 | 4002395374922 |
| (1) Ø 5.5 x 110 mm and Ø 5.5 / 6 / 7 / 8 x 160 mm | э | ' | 4932332034 | 4002393374922 |
| SDS-Plus M2 drill bit set (5pc) | 5 | 1 | 4932352801 | 4002395374595 |
| (1) Ø 10 / 12 / 14 / 16 / 20 x 450 mm | 5 | ' | 4932332001 | 4002393374393 |
| SDS-Plus M2 drill bit set (7pc) | 7 | 1 | 4932352339 | 4002205260000 |
| ② Ø 5 / 6 / 8 x 110 mm and Ø 6 / 8 / 10 / 12 x 160 mm | 1 | ' | 4932332339 | 4002395369980 |
| SDS-Plus M2 drill bit set (10pc) | | | | |
| ③ Ø 5 / 6 / 6 x 110 mm and Ø 6 / 6 / 8 / 8 / 10 / 12 / | 10 | 1 | 4932352340 | 4002395369997 |
| 14 x 160 mm | | | | |
| Drill bit and chisel set (5pc) | | | | |
| SDS-Plus drill bits Ø 6 / 8 / 10 x 160 mm, pointed and flat chisel | 5 | 1 | 4932430002 | 4002395376636 |





SDS-Plus contractor drill bits - 2 cut / 10 pack






| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|-----------------------|------------------|---------------------|----------------|---------------|
| 5.5 | 160 | 100 | 10 | 1 | 4932352695 | 4002395373536 |
| 6 | 160 | 100 | 10 | 1 | 4932352696 | 4002395373543 |
| 7 | 160 | 100 | 10 | 1 | 4932352697 | 4002395373550 |
| 8 | 160 | 100 | 10 | 1 | 4932352698 | 4002395373567 |
| 8 | 210 | 150 | 10 | 1 | 4932352699 | 4002395373574 |
| 10 | 210 | 150 | 10 | 1 | 4932352700 | 4002395373581 |

SDS-Plus TCT multipurpose drill bits

These drill bits will drill in metal, wood and stone but in rotary mode only.

Hammer action cannot be used with these drill bits.

Ideal for tradesmen who need to drill through a variety of materials in one go. Made in Germany.



| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|-----------------------|------------------|---------------------|----------------|---------------|
| 6 | 160 | 100 | 1 | 1 | 4932373918 | 4002395353484 |
| 8 | 210 | 150 | 1 | 1 | 4932373919 | 4002395353491 |
| 10 | 260 | 200 | 1 | 1 | 4932373920 | 4002395353507 |
| 12 | 260 | 200 | 1 | 1 | 4932373921 | 4002395353514 |

SDS-Plus extensions

NEW

Universal SDS-Plus extensions to extend the reach of SDS-Plus drill bits.

Tool free drill bit click & connect system.

Fits to all SDS-Plus rotary hammers and drill bits.

Optimal for drilling around obstructions such as previously installed pipes and for overhead drilling.

Allows deep hole drilling e.g. rebar applications without buying an expensive long drill bit.





| Length (mm) | Pack quantity | Min. order quantity | Article Number EAN Code | |
|-------------|---------------|---------------------|---------------------------------|--|
| 300 | 1 | 1 | 4932471153 4058546287818 | |
| 450 | 1 | 1 | 4932471154 4058546287825 | |

SDS-Plus dustless drill bits - 4 cut - One piece design

Faster and more efficient drill bit due to effective dust removal.


Efficient drilling without dust for a safer and cleaner working environment.

Active drill bit head cooling for a longer life.

4 cutter design prevents the drill bit from jamming into the rebar.

Accurate concentricity and high dimensional accuracy drilled holes, according to PGM Conformity.

Universal connector for all common vacuum cleaners with hose diameter 32 – 38 mm.



| | Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------|---------------------------|---------------------|-----------------------|------------------|---------------------|----------------|---------------|
| | 12 | 325 | 200 | 1 | 1 | 4932459283 | 4058546002497 |
| | 14 | 360 | 240 | 1 | 1 | 4932459284 | 4058546002503 |
| | 16 | 360 | 240 | 1 | 1 | 4932459285 | 4058546002510 |
| | 18 | 360 | 240 | 1 | 1 | 4932459286 | 4058546002527 |
| Univers | al vacuum cleaner adaptor | | | 1 | 1 | 4931416173 | 4002395805501 |

SDS-Plus TCT core cutters


Core cutters for rotary hammers up to 4 kg.


All TCT cores have a M16 x 2 thread and fit to both SDS-Plus and Hex 11 arbors.

Arbor and pilot drill bit required additionally.

Made in Germany.

Not suitable for reinforced concrete.






| Diameter (mm) | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|------------------|---------------------|----------------|---------------|
| 35 | 58 | 1 | 1 | 4932344478 | 4002395312559 |
| 50 | 58 | 1 | 1 | 4932344479 | 4002395312566 |
| 65 | 50 | 1 | 1 | 4932344480 | 4002395312573 |
| 68 | 50 | 1 | 1 | 4932399099 | 4002395357031 |
| 82 | 50 | 1 | 1 | 4932344481 | 4002395312580 |
| 90 | 50 | 1 | 1 | 4932344482 | 4002395312597 |

SDS-Plus TCT core cutter - set

Set version includes: TCT core cutter, SDS-Plus arbor 105 mm length, TCT pilot drill bit Ø 8 x 120 mm and allen key.



| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|-----------------------|------------------|---------------------|----------------|---------------|
| 65 | 182 | 50 | 4 | 1 | 4932399295 | 4002395359097 |
| 68 | 182 | 50 | 4 | 1 | 4932399296 | 4002395359103 |
| 82 | 182 | 50 | 4 | 1 | 4932399297 | 4002395359110 |

SDS-Plus TCT core cutter arbors

Both SDS-Plus and Hex arbors include an allen key and require a pilot drill bit additionally.







| Description | Reception | Diameter (mm) | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|--|---------------|---------------------|---------------|---------------------|----------------|---------------|
| 1 SDS-plus arbor | SDS-Plus | | 105 | 2 | 1 | 4932399966 | 4002395366255 |
| ① SDS-plus arbor | SDS-Plus | | 370 | 2 | 1 | 4932399967 | 4002395366262 |
| ② Hex arbor | 11 mm Hex | | 90 | 2 | 1 | 4932399968 | 4002395366279 |
| 3 TCT pilot drill bit for use in | masonry, concrete, brick etc. | 8 | 120 | 1 | 1 | 4932399125 | 4002395357291 |
| 3 TCT pilot drill bit with conic NOT SUITABLE for above a | cal shaft for old style arbors. rbors | 10 | 100 | 1 | 1 | 4932399020 | 4002395356058 |

SDS-MAX DRILL BITS

FASTER DRILLING, LONGER LIFETIME

SDS-MAX CARBIDE
DRILL BITS PROVIDE
THE FASTEST AND MOST
DURABLE SOLUTION
FOR DRILLING INTO
REINFORCED CONCRETE



VARIABLE FLUTE GEOMETRY FOR FASTER DRILLING



REINFORCED FLUTE LOWER VIBRATIONS AND LESS BREAKAGES





4 X 90° TIP GEOMETRY DELIVERS BEST PERFORMANCE IN REINFORCED CONCRETE AND ENSURES ROUND HOLES



BREAKER
POINTS
PULVERISE MATERIAL
MORE EFFICIENTLY



POINTENSURES OPTIMUM
GUIDANCE
DURING DRILLING

CENTERING



REBAR CHAMFERS PREVENTS DRILL BIT LOCK-UP/JAMMING





Faster drilling and round holes ensured even when hitting rebar in concrete

SDS-MAX



SDS-Max drill bits - 4 cut





| 12 340 200 1 1 1 482325779 40238571495 122 122 150 550 550 1 1 1 482325779 40228571495 100 11 1 482325771 400 11 1 482325771 40228571495 10 11 1 482325771 400 11 1 482325771 400 11 1 482325771 400 11 1 482325771 400 11 1 1 482325771 400 11 | Diameter (mm) | Total length (mm) A | Working length (mm) B | Pre-drill | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|---------------|---------------------|--------------------------|-----------|------------------|---------------------|----------------|---------------|--|
| 12 | 12 | 340 | 200 | | 1 | 1 | 4932352750 | 4002395374083 | |
| 14 340 200 1 1 4822827373 400289574113 15 340 200 1 1 482282734 400289574113 15 340 200 1 1 482282734 400289574129 15 540 400 V 1 1 482282735 40028957413 16 340 200 1 1 482282735 40028957413 16 340 400 V 1 1 482282735 400289574144 16 340 400 V 1 1 482282735 400289574144 16 340 340 200 V 1 1 482282735 40028957415 16 1200 1130 V 1 1 482282737 40028957420 16 1200 V 1 1 482282737 40028957420 1200 V 1 1 482282737 40028957423 1200 V 1 1 | 12 | 540 | 400 | ✓ | 1 | 1 | 4932352751 | 4002395374090 | |
| 14 | 12 | 690 | 550 | | 1 | 1 | 4932430727 | 4002395383887 | |
| 15 | 14 | 340 | 200 | | 1 | 1 | 4932352752 | 4002395374106 | |
| 15 | 14 | 540 | 400 | ✓ | 1 | 1 | 4932352753 | 4002395374113 | |
| 16 | 15 | 340 | 200 | | 1 | 1 | 4932352754 | 4002395374120 | |
| 16 | 15 | 540 | 400 | V | 1 | 1 | 4932352755 | 4002395374137 | |
| 16 | 16 | 340 | 200 | | 1 | 1 | 4932352756 | 4002395374144 | |
| 16 | 16 | 540 | 400 | V | 1 | 1 | 4932352757 | 4002395374151 | |
| 18 | 16 | 940 | 800 | V | 1 | 1 | 4932352758 | 4002395374168 | |
| 18 | 16 | 1320 | 1180 | V | 1 | 1 | 4932352759 | 4002395374175 | |
| 18 | 18 | 340 | 200 | | 1 | 1 | 4932352760 | 4002395374182 | |
| 18 | 18 | 540 | 400 | ~ | 1 | 1 | 4932352761 | 4002395374199 | |
| 18 | | | | | | | | | |
| 20 320 200 1 1 482352764 4002395374229 | | | | | 1 | | | | |
| 20 | | | | • | | | | | |
| 20 920 800 1 1 4932352766 4002395374243 | | | | V | | | | | |
| 20 | | | | | | | | | |
| 22 320 200 | | | | | | | | | |
| 22 | | | | • | | | | | |
| 22 | | | | | • | | | | |
| 22 1320 1200 ✓ 1 1 4932352771 4002395374298 24 320 200 1 1 4932352772 4002395374304 24 520 400 ✓ 1 1 4932352774 4002395374311 25 320 200 1 1 1 4932352775 4002395374328 25 520 400 ✓ 1 1 4932352777 4002395374335 25 520 400 ✓ 1 1 4932352777 4002395374372 26 520 400 ✓ 1 1 4932452777 4002395374359 26 520 400 ✓ 1 1 4932452777 4002395374373 28 570 450 ✓ 1 1 4932352779 4002395374397 28 920 800 ✓ 1 1 4932352779 4002395374403 30 370 250 1 | | | | | | | | | |
| 24 320 200 | | | | | | | | | |
| 24 520 400 ✔ 1 1 4932352773 4002395374311 25 320 200 1 1 4932352775 4002395374328 25 520 400 ✔ 1 1 4932352775 4002395374352 25 920 800 ✔ 1 1 49323527776 4002395374342 25 1320 1200 ✔ 1 1 49323527778 4002395374342 26 520 400 1 1 4932352778 4002395374366 28 370 250 1 1 4932352778 4002395374366 28 570 450 ✔ 1 1 4932352789 4002395374373 28 670 550 ✔ 1 1 4932352781 4002395374397 28 1320 1200 ✔ 1 1 4932352781 4002395374397 28 1320 1200 ✔ 1 1 | | | | | | | | | |
| 25 320 200 1 1 4832352774 4002395374328 25 520 400 ✓ 1 1 4932352776 4002395374352 25 920 800 ✓ 1 1 49323527776 4002395374342 25 1320 1200 ✓ 1 1 49323527777 4002395374599 26 520 400 1 1 49323527777 4002395374599 28 570 450 ✓ 1 1 49323527778 4002395374373 28 670 550 ✓ 1 1 4932352778 4002395374373 28 670 550 ✓ 1 1 4932352787 4002395374373 28 1320 1200 ✓ 1 1 4932352781 4002395374397 28 1320 1200 ✓ 1 1 4932352782 4002395374403 30 370 250 1 <td< td=""><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></td<> | | | | | | | | | |
| 25 | | | | <i>V</i> | | | | | |
| 25 | | | | _ | - | | | | |
| 25 | | | | | | | | | |
| 26 | | | | | | | | | |
| 28 | | | | ~ | | | | | |
| 28 570 450 V 1 1 4932352779 4002395374373 28 670 550 V 1 1 4932352780 4002395374380 28 920 800 V 1 1 4932352781 4002395374403 30 370 250 1 1 4932352783 4002395374410 30 570 450 1 1 4932352784 4002395374417 30 920 800 1 1 4932352784 4002395373447 32 370 250 1 1 4932352786 4002395374441 32 570 450 1 1 4932352786 4002395374441 32 570 450 1 1 4932352786 4002395374458 32 1320 1200 V 1 1 4932352788 4002395374472 35 570 450 1 1 4932352794 4002395374496 | | | | | | | | | |
| 28 670 550 ✓ 1 1 4932352780 4002395374380 28 920 800 ✓ 1 1 4932352781 4002395374397 28 1320 1200 ✓ 1 1 4932352782 4002395374403 30 370 250 1 1 4932352784 4002395374410 30 570 450 1 1 4932352784 4002395374427 30 920 800 1 1 4932352785 4002395374434 32 370 250 1 1 4932352786 4002395374434 32 570 450 1 1 4932352786 4002395374458 32 1320 1200 ✓ 1 1 4932352786 4002395374458 32 370 250 1 1 1 4932352789 4002395374472 35 370 250 1 1 1 4932352789 4002395374472 35 570 450 ✓ 1 1 < | | | | | | | | | |
| 28 920 800 ✔ 1 1 4932352781 4002395374397 28 1320 1200 ✔ 1 1 4932352782 4002395374403 30 370 250 1 1 1 4932352783 4002395374410 30 570 450 1 1 4932352784 4002395374427 30 920 800 1 1 4932352785 4002395374434 32 370 250 1 1 1 4932352786 4002395374434 32 570 450 1 1 4932352786 400239537448 32 920 800 ✔ 1 1 4932352788 4002395374465 35 370 250 1 1 1 4932352789 4002395374465 35 370 250 1 1 1 4932352789 4002395374465 35 570 450 ✔ 1 1 4932352791 4002395374502 38 370 250 1 | | | | | - | | | | |
| 28 1320 1200 ✓ 1 1 4932352782 4002395374403 30 370 250 1 1 4932352783 4002395374410 30 570 450 1 1 4932352784 4002395374427 30 920 800 1 1 4932352785 4002395374434 32 570 450 1 1 4932352786 4002395374441 32 920 800 ✓ 1 1 4932352786 4002395374441 32 920 800 ✓ 1 1 4932352786 4002395374441 32 1320 1200 ✓ 1 1 4932352789 4002395374458 35 370 250 1 1 4932352789 4002395374472 35 570 450 ✓ 1 1 4932352799 4002395374489 35 570 450 ✓ 1 1 4932352791 4002395374502 38 370 250 1 1 4932352792 <td></td> <td></td> <td></td> <td>~</td> <td></td> <td></td> <td></td> <td></td> <td></td> | | | | ~ | | | | | |
| 30 370 250 1 1 4932352783 4002395374410 30 570 450 1 1 4932352784 4002395374427 30 920 800 1 1 4932430729 4002395374434 32 370 250 1 1 4932352786 4002395374441 32 920 800 ✓ 1 1 4932352786 4002395374441 32 920 800 ✓ 1 1 4932352787 4002395374458 32 1320 1200 ✓ 1 1 4932352788 4002395374472 35 370 250 1 1 4932352799 4002395374472 35 570 450 ✓ 1 1 4932352791 4002395374472 38 370 250 1 1 4932352792 4002395374502 38 570 450 ✓ 1 1 4932352793 4002395374502 40 370 250 1 1 4932352794 4002395 | | | | V | | | | | |
| 30 570 450 1 1 4932352784 4002395374427 30 920 800 1 1 4932430729 4002395383900 32 370 250 1 1 4932352785 4002395374434 32 570 450 1 1 4932352786 4002395374441 32 920 800 | | 1320 | | ~ | | | 4932352782 | 4002395374403 | |
| 30 920 800 1 1 1 4932430729 4002395383900 32 370 250 1 1 1 4932352785 4002395374434 32 570 450 1 1 1 4932352786 4002395374441 32 920 800 | | 370 | 250 | | - | 1 | | | |
| 32 370 250 1 1 4932352785 4002395374434 32 570 450 1 1 4932352786 4002395374441 32 920 800 ✓ 1 1 4932352787 4002395374458 32 1320 1200 ✓ 1 1 4932352788 4002395374465 35 370 250 1 1 4932352789 4002395374472 35 570 450 1 1 4932352790 4002395374489 35 920 800 ✓ 1 1 4932352791 4002395374496 38 370 250 1 1 4932352792 4002395374502 38 570 450 1 1 4932352793 4002395374519 40 370 250 1 1 4932352793 4002395374564 40 570 450 ✓ 1 1 4932352796 400239537450 40 1320 1200 ✓ 1 1 4932352797 400239 | | 570 | 450 | | | | 4932352784 | 4002395374427 | |
| 32 570 450 1 1 4932552786 4002395374441 32 920 800 ✓ 1 1 4932352787 4002395374458 32 1320 1200 ✓ 1 1 4932352788 4002395374465 35 370 250 1 1 4932352789 4002395374472 35 570 450 1 1 4932352790 4002395374496 38 370 250 1 1 4932352791 4002395374496 38 570 450 1 1 4932352792 4002395374502 38 570 450 1 1 4932352793 4002395374519 40 370 250 1 1 4932352794 4002395374526 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374564 45 920 800 ✓ 1 1 4932352798 4002395 | 30 | 920 | 800 | | 1 | 1 | 4932430729 | | |
| 32 920 800 ✓ 1 1 4932352787 4002395374458 32 1320 1200 ✓ 1 1 4932352788 4002395374465 35 370 250 1 1 4932352789 4002395374472 35 570 450 1 1 4932352790 4002395374489 38 370 250 1 1 4932352791 4002395374502 38 570 450 1 1 4932352792 4002395374502 38 570 450 1 1 4932352793 4002395374519 40 370 250 1 1 4932352794 4002395374526 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374564 45 920 800 ✓ 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395 | 32 | 370 | 250 | | 1 | 1 | 4932352785 | 4002395374434 | |
| 32 1320 1200 ✓ 1 1 4932352788 4002395374465 35 370 250 1 1 4932352789 4002395374472 35 570 450 1 1 4932352790 4002395374489 38 370 250 1 1 4932352792 4002395374502 38 570 450 1 1 4932352793 4002395374519 40 370 250 1 1 4932352794 4002395374526 40 570 450 ✓ 1 1 4932352794 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 4002395374564 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395374564 45 920 800 1 1 4932430731 4002395383917 | 32 | 570 | 450 | | 1 | 1 | 4932352786 | 4002395374441 | |
| 35 370 250 1 1 4932352789 4002395374472 35 570 450 1 1 4932352790 4002395374489 35 920 800 ✓ 1 1 4932352791 4002395374496 38 370 250 1 1 4932352792 4002395374502 38 570 450 1 1 4932352793 4002395374519 40 370 250 1 1 4932352794 4002395374526 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 400239537457 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 </td <td>32</td> <td>920</td> <td>800</td> <td>✓</td> <td>1</td> <td>1</td> <td>4932352787</td> <td>4002395374458</td> <td></td> | 32 | 920 | 800 | ✓ | 1 | 1 | 4932352787 | 4002395374458 | |
| 35 570 450 1 1 4932352790 4002395374489 35 920 800 ✓ 1 1 4932352791 4002395374496 38 370 250 1 1 4932352792 4002395374502 38 570 450 1 1 4932352793 4002395374519 40 370 250 1 1 4932352794 4002395374526 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 400239537457 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 1 4932352799 40023953 | 32 | 1320 | 1200 | V | 1 | 1 | 4932352788 | 4002395374465 | |
| 35 920 800 ✓ 1 1 4932352791 4002395374496 38 370 250 1 1 4932352792 4002395374502 38 570 450 1 1 4932352793 4002395374519 40 370 250 1 1 4932352794 4002395374526 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 4002395374577 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 1 4932352799 4002395374571 | 35 | 370 | 250 | | 1 | 1 | 4932352789 | 4002395374472 | |
| 38 370 250 1 1 4932352792 4002395374502 38 570 450 1 1 4932352793 4002395374519 40 370 250 1 1 4932352794 4002395374526 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 4002395374557 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | 35 | 570 | 450 | | 1 | 1 | 4932352790 | 4002395374489 | |
| 38 570 450 1 1 4932352793 4002395374519 40 370 250 1 1 4932352794 4002395374526 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 4002395374557 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | 35 | 920 | 800 | V | 1 | 1 | 4932352791 | 4002395374496 | |
| 40 370 250 1 1 4932352794 4002395374526 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 4002395374557 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | 38 | 370 | 250 | | 1 | 1 | 4932352792 | 4002395374502 | |
| 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 4002395374557 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | 38 | 570 | 450 | | 1 | 1 | 4932352793 | 4002395374519 | |
| 40 570 450 ✓ 1 1 4932352795 4002395374533 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 4002395374557 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | 40 | 370 | 250 | | 1 | 1 | 4932352794 | 4002395374526 | |
| 40 920 800 ✓ 1 1 4932352796 4002395374540 40 1320 1200 ✓ 1 1 4932352797 4002395374557 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | | | | V | 1 | | | | |
| 40 1320 1200 ✓ 1 1 4932352797 4002395374557 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | | | | | | | | | |
| 45 570 450 1 1 4932352798 4002395374564 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | | | | | | | | | |
| 45 920 800 1 1 4932430730 4002395383917 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | | | | | | | | | |
| 50 570 450 1 1 4932430731 4002395383924 52 570 450 1 1 4932352799 4002395374571 | | | | | | | | | |
| 52 570 450 1 1 4932352799 4002395374571 | | | | | | | | | |
| | | | | | | | | | |
| | | | .55 | | | | .002002700 | | |
| | | | | | | | | | |

[✔] Pre drill with a short drill bit of the same diameter.

SDS-Max dustless drill bits - 4 cut - One piece design

Faster and more efficient drill bit due to effective dust removal.

Efficient drilling without dust for a safer and cleaner working environment.

Active drill bit head cooling for a longer life.

4 cutter design prevents the drill bit from jamming into the rebar.

Accurate concentricity and high dimensional accuracy drilled holes, according to PGM Conformity.

Universal connector for all common vacuum cleaners with hose diameter 32 – 38 mm.



| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------------------|---------------------|-----------------------|------------------|---------------------|----------------|---------------|
| 16 | 600 | 400 | 1 | 1 | 4932459287 | 4058546002534 |
| 18 | 600 | 400 | 1 | 1 | 4932459288 | 4058546002541 |
| 20 | 600 | 400 | 1 | 1 | 4932459289 | 4058546002558 |
| 22 | 600 | 400 | 1 | 1 | 4932459290 | 4058546002565 |
| 24 | 600 | 400 | 1 | 1 | 4932459291 | 4058546002572 |
| 25 | 600 | 400 | 1 | 1 | 4932459292 | 4058546002589 |
| 28 | 600 | 400 | 1 | 1 | 4932459293 | 4058546002596 |
| 28 | 900 | 900 | 1 | 1 | 4932459294 | 4058546002602 |
| 30 | 600 | 400 | 1 | 1 | 4932459295 | 4058546002619 |
| 30 | 900 | 700 | 1 | 1 | 4932459296 | 4058546002626 |
| 32 | 600 | 400 | 1 | 1 | 4932459297 | 4058546002633 |
| 32 | 900 | 700 | 1 | 1 | 4932459298 | 4058546002640 |
| 35 | 600 | 400 | 1 | 1 | 4932459299 | 4058546002657 |
| 35 | 900 | 700 | 1 | 1 | 4932459300 | 4058546002664 |
| Universal vacuum cleaner adaptor | | | 1 | 1 | 4931416173 | 4002395805501 |



SDS-Max TCT tunnel drill bits -One piece design

One piece solid steel tool.


Increased lifetime.


Vario tunnel drill bits (supplied with thread).

Suitable for all rotary hammers.

Made in Germany.

Not suitable for reinforced concrete.





| Diameter (mm) | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|------------------|---------------------|----------------|---------------|
| 45 | 550 | 1 | 1 | 4932373892 | 4002395353217 |
| 45 | 990 | 1 | 1 | 4932399366 | 4002395359837 |
| 55 | 550 | 1 | 1 | 4932373893 | 4002395353224 |
| 55 | 990 | 1 | 1 | 4932399368 | 4002395359851 |
| 65 | 550 | 1 | 1 | 4932373894 | 4002395353231 |
| 65 | 990 | 1 | 1 | 4932399370 | 4002395359875 |
| 80 | 550 | 1 | 1 | 4932373895 | 4002395353248 |
| 80 | 990 | 1 | 1 | 4932399372 | 4002395359899 |

SDS-Max TCT core cutters - One piece design


One piece solid steel tool.

Increased lifetime.

Supplied with pilot drill bit and ejector tool.

Made in Germany.

Not suitable for reinforced concrete.







| Description | Diameter (mm) | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------|---------------|---------------------|------------------|---------------------|----------------|---------------|
| 1 | 50 | 290 | 1 | 1 | 4932399373 | 4002395359905 |
| | 50 | 550 | 1 | 1 | 4932373884 | 4002395353132 |
| | 68 | 290 | 1 | 1 | 4932399374 | 4002395359912 |
| | 68 | 550 | 1 | 1 | 4932373885 | 4002395353149 |
| | 80 | 290 | 1 | 1 | 4932399375 | 4002395359929 |
| | 80 | 550 | 1 | 1 | 4932373886 | 4002395353156 |
| | 100 | 550 | 1 | 1 | 4932373888 | 4002395353170 |
| | 125 | 550 | 1 | 1 | 4932373889 | 4002395353187 |
| | 150 | 550 | 1 | 1 | 4932373890 | 4002395353194 |
| ② Ejector tool | | | 1 | 1 | 4932399021 | 4002395356065 |
| 3 Pilot drill bit | 11 | 120 | 1 | 1 | 4932245967 | 4002395307111 |

SDS-Max TCT core cutters -Two piece design


Not suitable for rotary hammers > 10 kg. Made in Germany.

Not suitable for reinforced concrete.









| Description | Diameter (mm) | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------|---------------|---------------------|------------------|---------------------|----------------|---------------|
| 1 | 40 | 100 | 1 | 1 | 4932245992 | 4002395307180 |
| | 50 | 100 | 1 | 1 | 4932430732 | 4002395383931 |
| | 60 | 100 | 1 | 1 | 4932430733 | 4002395383948 |
| | 65 | 100 | 1 | 1 | 4932245994 | 4002395307203 |
| | 68 | 100 | 1 | 1 | 4932430734 | 4002395383955 |
| | 80 | 100 | 1 | 1 | 4932245995 | 4002395307210 |
| | 90 | 100 | 1 | 1 | 4932430735 | 4002395383962 |
| | 100 | 100 | 1 | 1 | 4932367304 | 4002395336432 |
| | 125 | 100 | 1 | 1 | 4932367306 | 4002395336456 |
| | 150 | 100 | 1 | 1 | 4932367308 | 4002395336470 |
| 2) Arbor SDS-Max | - | 180 | 1 | 1 | 4932343667 | 4002395315932 |
| | - | 450 | 1 | 1 | 4932343670 | 4002395315949 |
| 3 Ejector tool | - | - | 1 | 1 | 4932604214 | 4002395311231 |
| Pilot drill bit | 11 | 120 | 1 | 1 | 4932245967 | 4002395307111 |

Adaptor



| Description | Tool reception | Drill reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------------------|----------------|-----------------|------------------|---------------------|----------------|---------------|
| SDS-Max to SDS-Plus chuck adaptor | SDS-Max | SDS-Plus | 1 | 1 | 4932359490 | 4002395325795 |

SDS-Max vario extension system

Flexible tool system: can be extended to variable lengths in combination with core cutters or tunnel bits. We recommend a maximum of 3 extensions.

Cost effective: different drill sizes can be exchanged easily and fast with the threaded stud system.

Suitable for rotary hammers up to 8 kg.

Vario tunnel bits (supplied with thread).

Not suitable for reinforced concrete.

| | | | | | | | ⊢——A—— |
|---|------------------|------------------------|------------------|---------------------|----------------|---------------|--|
| Description | Diameter (mm) | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code | 1) |
| ① SDS-Max arbor with internal thread | _ | 195 | 1 | 1 | 4932430736 | 4002395383979 | Δ |
| internal thread | | 100 | · | , | 4002400700 | 40020000075 | 2 |
| 2 Vario extension (incl. threaded stud) | 25 | 280 | 1 | 1 | 4932430737 | 4002395383986 | |
| (incl. threaded stud) | 20 | 200 | · | | 4002400707 | 40020000000 | 3 |
| ③ Vario threaded stud | - | - | 1 | 1 | 4932430738 | 4002395383993 | (a) Company of the Co |
| Varia threaded stud | | | | | | | |
| Vario threaded stud with tapered end 1:8 for TCT core | | - | 1 | 1 | 4932430748 | 4002395384099 | 4 |
| cutters | | | | | | | |
| | | | | | | | ⊢——A—— |
| TCT core cutter | 40 | 100 | 1 | 1 | 4932245992 | 4002395307180 | |
| | 50 | 100 | 1 | 1 | 4932430732 | 4002395383931 | 5 1000000 Ø |
| | 60 | 100 | 1 | 1 | 4932430733 | 4002395383948 | |
| | 65 | 100 | 1 | 1 | 4932245994 | 4002395307203 | |
| | 68 | 100 | 1 | 1 | 4932430734 | 4002395383955 | |
| | 80 | 100 | 1 | 1 | 4932245995 | 4002395307210 | |
| | 90 | 100 | 1 | 1 | 4932430735 | 4002395383962 | 6 |
| | 100 | 100 | 1 | 1 | 4932367304 | 4002395336432 | |
| | 125 | 100 | 1 | 1 | 4932367306 | 4002395336456 | |
| | 150 | 100 | 1 | 1 | 4932367308 | 4002395336470 | 7) A Ø |
| 6 Ejector tool | - | - | 1 | 1 | 4932604214 | 4002395311231 | |
| Pilot drill bit | 11 | 120 | 1 | 1 | 4932245967 | 4002395307111 | |
| Varia burnal drill | | | | | | | ⊢——A—— |
| Vario tunnel drill (8) bits (supplied with | 30 | 150 | 1 | 1 | 4932430739 | 4002395384006 | 8 |
| thread) | | | | | | | |
| | 35 | 150 | 1 | 1 | 4932430740 | 4002395384013 | |
| | 40 | 150 | 1 | 1 | 4932430743 | 4002395384044 | |
| | 45 | 150 | 1 | 1 | 4932430744 | 4002395384051 | |
| | 55 | 150 | 1 | 1 | 4932430745 | 4002395384068 | |
| | 60 | 150 | 1 | 1 | 4932430741 | 4002395384020 | |
| | 68 | 150 | 1 | 1 | 4932430746 | 4002395384075 | |
| | 80 | 150 | 1 | 1 | 4932430747 | 4002395384082 | |
| | 90 | 150 | 1 | 1 | 4932430742 | 4002395384037 | |
| | 1 | | | 2 | | 2 | 8 |
| | | | | 666666 | 777 | -646666666666 | |
| SDS max | | | | | | | 5 |
| IIIax | | | | | | | 4) |
| | | | | | | | |
| | | | | | | | |

Drill Connect


The innovative and patented Drill Connect System is the ultimate solution for those requiring maximum versatility with large diameter drilling tools.

Versatile:

Drill Connect acts as a link between machine and drilling tools. On one side the system is totally compatible to all SDS-Max reception drilling tools such as drill bits, tunnel bits and core cutters. On the opposite side, between the rotary hammer and the Drill Connect attachment, one can fit the extension piece with the desired length.

Cost effective:

Professional users always require both long and short length drill bits and depending on the application sometimes even of the same diameter. But now, one can reduce the total number of drilling tools with the help of the Drill Connect System which makes it possible to interchange the drilling tools diameter and length in one simple step. Therefore users can reap the benefits of purchasing the cheaper short length drill bits and extending the length with the economical extensions plus the flexibility of Drill Connect reduces the overall quantity of drill bits one must carry in their toolbox.

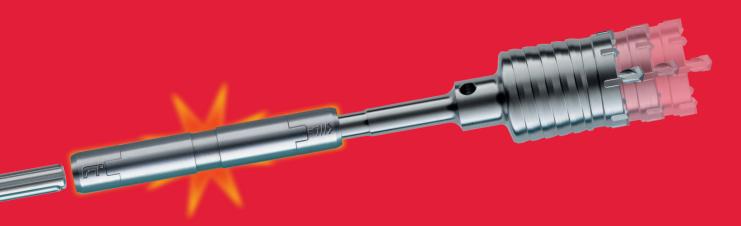

100% Power:


The Drill Connect attachment provides a quick and safe connection between drilling tool and extension piece and therefore ensures that 100% of the power is completely transmitted to the drill bit tip.



Less weight

The combination of short drilling tools and 18 mm diameter extensions reduces the overall weight by up to 15%.

- We recommend that Drill Connect be cleaned of concrete dust and lubricated with grease at regular intervals (Grease Part-no. 4932352273).
- Drill Connect is only suitable for drilling tools in excess of 32 mm diameter and limited for use with rotary hammers up to 8 kg in weight.

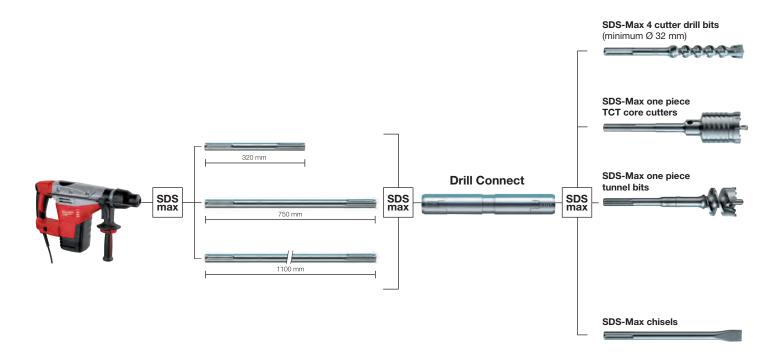

Drill connect

Suitable for use with drilling tools with a \emptyset of 32 mm and above.

For use with rotary hammers up to 8 kg in weight.

| Description | Tool reception | Drill connect reception | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code | A | - International Property of the Inte |
|---------------|----------------|-------------------------------|------------------------|------------------|---------------------|----------------|---------------|---|--|
| Drill connect | SDS-Max | SDS-Max | 190 | 1 | 1 | 4932399128 | 4002395357321 | | |

Extension pieces

| Description | Tool reception | Drill connect reception | Length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|----------------------|-------------------|-------------------------------|------------------|------------------|------------------------|----------------|---------------|--|
| SDS-Max extension | SDS-Max | SDS-Max | 320 | 1 | 1 | 4932399242 | 4002395358533 | |
| SDS-Max extension | SDS-Max | SDS-Max | 750 | 1 | 1 | 4932399129 | 4002395357338 | |
| SDS-Max | SDS-Max | SDS-Max | 1100 | 1 | 1 | 4932399243 | 4002395358540 | |

Grease

This grease has been specially formulated to lubricate and protect both the tool and accessories ensuring increased lifetime.

Apply sparingly directly onto the reception of the drill bit, chisel or core cutter, etc. Contains 50 grams.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| Grease | 1 | 1 | 4932352273 | 4002395369324 |
| Counter display with 15 x single grease tube | 15 | 1 | 4932352274 | 4002395369331 |



Chisels

Every chisel comes with 150 years experience in manufacturing expertise, we know what it takes to make the best chisel. A high quality chisel needs to withstand the daily routine of breaking and demolition on the worksite, this demands a chisel with a low wear rate, impact strength and elasticity to have a low risk of breaking.

With these objectives in mind great attention is placed on sourcing the correct raw materials and to use the most up to date manufacturing techniques.

For the base material a specifically defined alloy steel is chosen, then each chisel is crafted individually through the production process of forging, sharpening, hardening, tempering and finishing.

The chisels are precision formed using traditional forging skills coupled with sophisticated machinery for the specific tip design.

The heat treatment process is totally enclosed and computer controlled ensuring consistent results, this guarantees that the complete chisel is hardened throughout to 55 HRC. The tempering operation creates a uniform hardened surface across the complete chisel to give it impact strength, more wear resistance and the required elasticity.

The chisels then go through the final finishing process which gives the chisel a smooth grain flow surface and a special corrosion resistant treatment.

Finally for identification purposes the MILWAUKEE® logo is laser marked on the chisel.

To achieve long service life all our chisels can be resharpened time and time again.

These chisels stand for 100% quality - Made in Germany.

 Convex angle designed tip for better penetration less binding and easier resharpening.

② A strong and shock absorbing body made from premium quality alloy steel.

3 The reception is machined to precise tolerances ensuring less wear on the chisel and power tool.

① Chamfered ends to prevent cracking and fractures.

⑤ The striking end is machined flat so that 100% of the blow energy is transferred to the tip.

Maintenance Tips


- 1. Grease the reception regularly (MILWAUKEE® grease part no. 4932352273).
- 2. Keep receptions clean from dust.
- 3. Do not exert excessive side pressure on the chisel. Do not use as a crowbar.
- 4. Do not store chisels outdoors at temperatures below freezing, if so chisels should be warmed before use. Rusty chisels are more likely to suffer fatigue failure.

SDS-Plus chisels SDS-plus **Total length Blade width** Min. order Pack Description **EAN Code Article Number** (mm) quantity quantity SDS-Plus HP selfsharpening pointed chisel* (1)SDS-Plus HP selfsharpening flat chisel* 3 SDS-Plus thin pointed chisel ④ SDS-Plus pointed chisel (4) ⑤ SDS-Plus thin flat chisel (5) 6 SDS-Plus flat chisel (7) SDS-Plus wide chisel (7)SDS-Plus 3 pc chisel set: 1 x Pointed chisel, 1 x Flat chisel, 1 x Wide chisel SDS-Plus tile removal chisel 10 SDS-plus gouge chisel ① SDS-Plus plaster removal chisel SDS-Plus floor / wall scraper (12) Spare 1 mm thick floor / wall scraper blade with 3 x bolts / nuts SDS-Plus mortar chisel (13)

The self-sharpening tip geometry helps the bit maintain its shape throughout the life of the chisel, providing increased productivity by breaking up the material more effectively.

^{*} MILWAUKEE® Self-Sharpening Chisels provide longer life and increased productivity during general demolition applications. The extended feature length at the tip of the chisel enables up to 2x longer life compared to standard chisels and up to 30% longer life compared to other self-sharpening chisels

SDS-Max chisels



| | Description | Total length (mm) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | | SDS-Max |
|----------|--|-------------------------|------------------------|------------------|---------------------|----------------|---------------|---------------|--|
| (1 | SDS-Max HP self- sharpening pointed | 400 | - | 1 | 1 | 4932459281 | 4058546002473 | ① = | |
| | chisel* | 400 | - | 20 | 1 | 4932459342 | 4058546010034 | | |
| C. | SDS-Max HP flat chisel | 400 | 25 | 1 | 1 | 4932459282 | 4058546002480 | @ - | |
| | self sharpening* | 400 | 25 | 20 | 1 | 4932459343 | 4058546010041 | ② ≡ | |
| | | 280 | - | 1 | 1 | 4932343734 | 4002395317509 | | |
| (| SDS-Max pointed chisel | 400 | - | 1 | 1 | 4932343735 | 4002395317516 | 3 = | To the |
| G | 5) 3D3-wax pointed chisei | 400 | - | 20 | 1 | 4932399302 | 4002395359165 | | |
| | | 600 | - | 1 | 1 | 4932343736 | 4002395317523 | 4 | |
| | | 280 | 25 | 1 | 1 | 4932343737 | 4002395317530 | | |
| (2 | SDS-Max flat chisel | 400 | 25 | 1 | 1 | 4932343738 | 4002395317547 | ⑤ = | |
| (2 | DO-MAX HAL CHISEI | 400 | 25 | 20 | 1 | 4932399303 | 4002395359172 | | |
| | | 600 | 25 | 1 | 1 | 4932343739 | 4002395317554 | (6) (= | |
| | | 400 | 50 | 1 | 1 | 4932343743 | 4002395317592 | <u> </u> | |
| (E | SDS-Max wide chisel | 300 | 80 | 1 | 1 | 4932343744 | 4002395317608 | ⑦ = | |
| | | 300 | 115 | 1 | 1 | 4932343745 | 4002395317615 | 0 | |
| (4) | SDS-Max tile removal chisel | 300 | 80 | 1 | 1 | 4932399234 | 4002395358489 | 8 = | |
| Ø | SDS-Max chasing gouge chisel | 300 | 26 | 1 | 1 | 4932343740 | 4002395317561 | • | |
| (8 | 3) SDS-Max spade chisel | 400 | 110 | 1 | 1 | 4932343747 | 4002395317639 | | |
| (9 | SDS-Max surface treatment / bushing tool | 240 | 50 | 1 | 1 | 4932352918 | 4002395375769 | 9 = | |
| | | 220 | Ø 13.3 | 1 | 1 | 4932451354 | 4002395159031 | | |
| (I | SDS-Max electrode / ground rod driver | 220 | Ø 16.6 | 1 | 1 | 4932451355 | 4002395159048 | 10 | , |
| | | 220 | Ø 22.2 | 1 | 1 | 4932451356 | 4002395159055 | | |
| 6 | SDS-Max tooth removal | 215 | 11 | 1 | 1 | 4932464298 | 4058546222437 | 11) = | |
| (| U chisel | 215 | 14 | 1 | 1 | 4932464910 | 4058546228552 | | |
| Œ | SDS-Max mortar chisel | 280 | 38 | 1 | 1 | 4932472031 | 4058546324278 | 12 = | - Control of the Cont |

PCHDE - Universal chiselling dust extraction system

Universal dust extraction solution fitting to all brands of SDS-Max hammers.

Collects over 90% of chiselled dust.

Saves valuable post cleaning time.

Fits to MILWAUKEE $\!\!^{\scriptscriptstyle{\circledcirc}}$ vacs with easy and secure click system.


Can only be used with DE type chisels listed below.

The following spare parts are available for a quick turnaround: spring (4931328988), rubber rings (5 pc) (4931455278), main housing (4931449576) and front hose with plastic nose (4931455277)

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| PCHDE: Includes 1 x SDS-Max point chisel | 1 | 1 | 4932455280 | 4002395247943 |
| PCHDE: Includes 1 x SDS-Max flat chisel | 1 | 1 | 4932455275 | 4002395247936 |
| SDS-Max DE point chisel 400 mm long | 1 | 1 | 4932455144 | 4002395247981 |
| SDS-Max DE flat chisel 400 mm long | 1 | 1 | 4932455145 | 4002395247974 |



21 mm K-Hex chisels



| Description | Total length (mm) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | 21 mm K-Hex |
|---|-------------------------|------------------------|------------------|------------------------|----------------|---------------|-------------|
| | 380 | - | 1 | 1 | 4932399251 | 4002395358632 | |
| ① 21 mm K-Hex pointed chisel | 450 | - | 1 | 1 | 4932399252 | 4002395358649 | ① |
| | 600 | - | 1 | 1 | 4932399253 | 4002395358656 | |
| | 380 | 25 | 1 | 1 | 4932399256 | 4002395358687 | |
| ② 21 mm K-Hex flat chisel | 450 | 25 | 1 | 1 | 4932399257 | 4002395358694 | 2 |
| | 600 | 25 | 1 | 1 | 4932399258 | 4002395358700 | |
| (3) 21 mm K-Hex flat wide chisel | 300 | 50 | 1 | 1 | 4932399260 | 4002395358724 | 3 |
| 3 21 mm K-Hex flat wide chisel | 300 | 75 | 1 | 1 | 4932399261 | 4002395358731 | |
| ② 21 mm K-Hex spade chisel | 533 | 110 | 1 | 1 | 4932399264 | 4002395358762 | 4 |
| | 222 | Ø 12 | 1 | 1 | 4932399265 | 4002395358779 | |
| ⑤ 21 mm K-Hex electrode / ground rod driver | 222 | Ø 16 | 1 | 1 | 4932399266* | 4002395358786 | |
| | 222 | Ø 25 | 1 | 1 | 4932399269 | 4002395358816 | |




21 mm K-Hex / SDS-Max special application tools

Tamping tools

Application: Suitable for compacting earth and ballast prior to pouring concrete. Tamping back-fill on ditches. Requires universal taper shank.

| Description | Width (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---------------|--------------|--------------------------|---------------|---------------------|----------------|---------------|--|
| Tamping plate | 120 | 120 | 1 | 1 | 4932399270 | 4002395358823 | |



Surface treatment tools


Application: For roughing up concrete before its surface coated i.e. for pitted or uneven floors or walls must often be roughened prior to covering with a new layer of coating. Requires universal taper shank.


| Description | Length (mm) A | Width (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------|---------------|--------------|------------------|---------------------|----------------|---------------|
| Bushing head | 50 | 50 | 1 | 1 | 4932399279 | 4002395358915 |



Floor cleaning tools

Application: For scraping floor tile adhesive, paint, scree and other floor coatings. Requires universal taper shank.









| Description | Blade length (mm) A | Blade width (mm) B | Thickness (mm) C | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|---------------------|--------------------|------------------|------------------|---------------------|----------------|---------------|
| Floor cleaning tool including 2 mm blade. Requires universal taper shank | 180 | 150 | 2 | 2 | 1 | 4932399272 | 4002395358847 |
| ② Spare 2 mm blade | 180 | 150 | 2 | 1 | 1 | 4932399273 | 4002395358854 |
| 3 Replacement clamping brack | cet | | | 1 | 1 | 4932399275 | 4002395358878 |
| Service set 2 x gasket, 4 x nuts, 4 x scre | ws, 8 x washers | | | 18 | 1 | 4932352300 | 4002395369591 |

Universal taper shanks



| Description | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------------|---------------------|------------------|---------------------|----------------|---------------|
| ① Universal taper shank SDS-Max | 300 | 1 | 1 | 4932343771 | 4002395317745 |
| A Universal taper shapk 21 mm / Hey | 300 | 1 | 1 | 4932399280 | 4002395358922 |
| ② Universal taper shank 21 mm K-Hex | 450 | 1 | 1 | 4932399281 | 4002395358939 |

Dust guard


Prevents dust and dirt entering the tool reception area when using spades and ground rod drivers.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------|------------------|---------------------|----------------|---------------|
| Dust guard cap | 1 | 1 | 9170086960 | 4002395565504 |





28 mm Hex chisels



| Description | Total length (mm) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | | 28 mm Hex |
|-----------------------------------|-------------------------|------------------------|------------------|------------------------|----------------|---------------|----------|-----------|
| ① 28 mm Hex pointed chisel | 400 | - | 1 | 1 | 4932459774 | 4058546029463 | 1 | - |
| 28 mm Hex 400 x 35 mm flat chisel | 400 | 35 | 1 | 1 | 4932459775 | 4058546029470 | 2 | |
| 3 28 mm Hex flat wide chisel | 400 | 80 | 1 | 1 | 4932459776 | 4058546029487 | 3 | |
| (4) 28 mm Hex spade chisel | 400 | 125 | 1 | 1 | 4932459777 | 4058546029494 | 4 | |
| ⑤ 28 mm Hex asphalt cutter | 400 | 90 | 1 | 1 | 4932459778 | 4058546029500 | ⑤ | |
| (6) 28 mm Hex taper tool holder | - | - | 1 | 1 | 4932459779 | 4058546029517 | 6 | |
| ② 28 mm Hex tamping plate | 200 | 200 | 1 | 1 | 4932459780 | 4058546029524 | 7 | |

30 mm Hex chisels




| Description | Total length (mm) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | 30 mm Hex |
|----------------------------|-------------------------|------------------------|------------------|---------------------|----------------|---------------|-------------|
| ① 30 mm Hex pointed chisel | 400 | - | 1 | 1 | 4932464162 | 4058546221072 | |
| ② 30 mm Hex flat chisel | 400 | 32 | 1 | 1 | 4932464163 | 4058546221089 | 2 |
| 30 mm Hex flat wide chisel | 400 | 75 | 1 | 1 | 4932464164 | 4058546221096 | 3 |
| ④ 30 mm Hex spade chisel | 400 | 100 | 1 | 1 | 4932464165 | 4058546221102 | 4 |
| ⑤ 30 mm Hex asphalt cutter | 400 | 90 | 1 | 1 | 4932464166 | 4058546221119 | 5 |
| 30 mm Hex taper toolholder | - | - | 1 | 1 | 4932464167 | 4058546221126 | © —— |

| Name | | Top view | Suitable for | | |
|---|--------|-----------------------|--|-----|----------|
| ① SDS-plus | drill | 10+ | AEG, MILWAUKEE®, Bosch, Dewalt, Hilti, Hitachi, Kango, Makita, Ryobi | 1 | 53.5 |
| ① SDS-plus | chisel | 10- | AEG, MILWAUKEE®, Bosch, Dewalt, Hilti, Hitachi, Kango, Makita, Ryobi | 2 | 116 |
| ② SDS-Max | drill | 18-1 | AEG, MILWAUKEE®, Bosch, Dewalt, Hilti, Hitachi, Kango, Makita, Ryobi | 3 | 40 14 35 |
| ② SDS-Max | chisel | 18-1 | AEG, MILWAUKEE®, Bosch, Dewalt, Hilti, Hitachi, Kango, Makita, Ryobi | | 75.5 |
| ③ Spline | drill | *193* 5757 5755 | AEG, MILWAUKEE®, Bosch, Dewalt, Hilti, Hitachi, Kango, Makita, Metabo | 4 | 75,5 |
| ④ Twisted spline | chisel | 21,9 16.5 | AEG, MILWAUKEE®, Bosch, Dewalt, Hilti, Hitachi, Kango, Makita, Metabo | (5) | 74 33 |
| ⑤ 13 mm Hexagon | drill | 13 | Hitachi, Makita | 6 | 44 |
| ⑥ 17 mm Hexagon | chisel | 12.8 | Hitachi, Makita | 7 | 52 37 |
| ⑦ 19 mm K-Hexagon | chisel | 19-19-14 | Kango | 8 | 64 37 |
| 819 mm Hexagon | chisel | 19- | AEG, MILWAUKEE®, Bosch, Dewalt, Ryobi | 9 | 70.9 |
| ⊚ 21 mm K-Hexagon | drill | 21.9 | Hitachi, Kango, Makita, MILWAUKEE® | 100 | 106 |
| 10 21 mm K-Hexagon | chisel | 18.7 | Hitachi, Kango, Makita, MILWAUKEE® | | 65 38 |
| ① 28 mm Hexagon | chisel | ←-28→ | AEG, MILWAUKEE® | 11) | 106 |
| ② 30 mm Hexagon | chisel | -32- | Atlas Copco, Kango, MILWAUKEE® | 12) | 65 38 |

Concrete drill bits - round shank - DIN 8039

Diamond ground percussion carbide tip with two cutting edges.

For drilling in brick, tile, ceramic, concrete, plaster, slate and aerated concrete blocks. Made in Germany.



| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------------|--------------------------|------------------|------------------------|----------------|----------------|
| 3 | 70 | 40 | 1 | 1 | 4932363630 | 4002395332007 |
| 3.5 | 80 | 45 | 1 | 1 | 4932399916 | 4002395365746 |
| 4 | 85 | 50 | 1 | 1 | 4932363631 | 4002395332014 |
| 4.5 | 85 | 50 | 1 | 1 | 4932363632 | 4002395332021 |
| 5 | 85 | 50 | 1 | 1 | 4932363633 | 4002395332038 |
| 5 | 150 | 90 | 1 | 1 | 4932363634 | 4002395332045 |
| 5.5 | 85 | 50 | 1 | 1 | 4932363635 | 4002395332052 |
| 5.5 | 150 | 90 | 1 | 1 | 4932367035 | 4002395333998 |
| 6 | 100 | 60 | 1 | 1 | 4932363636 | 4002395332069 |
| 6 | 150 | 90 | 1 | 1 | 4932363637 | 4002395332076 |
| 6 | 200 | 150 | 1 | 1 | 4932399383 | 4002395360000 |
| 6 | 600 | 550 | 1 | 1 | 4932352506 | 4002395371648 |
| 6.5 | 100 | 60 | 1 | 1 | 4932363638 | 4002395332083 |
| 6.5 | 150 | 90 | 1 | 1 | 4932367036 | 4002395334605 |
| 7 | 100 | 60 | 1 | 1 | 4932367636 | 4002395332090 |
| | | | | 1 | | |
| 7 | 150 | 90 | 1 | | 4932367037 | 4002395334612 |
| 7.5 | 100 | 60 | 1 | 1 | 4932399917 | 4002395365753 |
| 8 | 120 | 80 | 1 | 1 | 4932363640 | 4002395332106 |
| 8 | 200 | 150 | 1 | 1 | 4932363641 | 4002395332113 |
| 8 | 400 | 350 | 1 | 1 | 4932399384 | 4002395360017 |
| 8 | 600 | 550 | 1 | 1 | 4932352507 | 4002395371655 |
| 8.5 | 120 | 80 | 1 | 1 | 4932363642 | 4002395332120 |
| 9 | 120 | 80 | 1 | 1 | 4932363643 | 4002395332137 |
| 9.5 | 120 | 80 | 1 | 1 | 4932399919 | 4002395365777 |
| 10 | 120 | 80 | 1 | 1 | 4932363644 | 4002395332144 |
| 10 | 200 | 150 | 1 | 1 | 4932363645 | 4002395332151 |
| 10 | 400 | 350 | 1 | 1 | 4932399385 | 4002395360024 |
| 10 | 600 | 550 | 1 | 1 | 4932352508 | 4002395371662 |
| 11 | 150 | 85 | 1 | 1 | 4932363646 | 4002395332168 |
| 12 | 150 | 85 | 1 | 1 | 4932363647 | 4002395332175 |
| 12 | 200 | 150 | 1 | 1 | 4932363648 | 4002395332182 |
| 12 | 400 | 350 | 1 | 1 | 4932399386 | 4002395360031 |
| 12 | 600 | 550 | 1 | 1 | 4932352510 | 4002395371686 |
| 13 | 150 | 90 | 1 | 1 | 4932363649 | 4002395332199 |
| 13 | 400 | 350 | 1 | 1 | 4932352512 | 4002395371709 |
| 14 | 150 | 90 | 1 | 1 | 4932363650 | 4002395332205 |
| 14 | 400 | 350 | 1 | 1 | 4932399387 | 4002395360048 |
| 14 | 600 | 550 | 1 | 1 | 4932352513 | 4002395371716 |
| 15 | 160 | 100 | 1 | 1 | 4932399380 | 4002395359974 |
| 16 | 160 | 100 | 1 | 1 | 4932373914 | 4002395353446 |
| 16 | 400 | 350 | 1 | 1 | 4932399388 | 4002395360055 |
| 16 | 600 | 550 | 1 | 1 | 4932352514 | 4002395371723 |
| 18 | 160 | 100 | 1 | 1 | 4932332314 | 40023953577725 |
| 18 | 400 | 350 | 1 | 1 | 4932352515 | 40023953510454 |
| 20 | 160 | 100 | 1 | 1 | 4932399230 | 4002395371730 |
| | | | | | | |
| 20 | 400 | 350 | 1 | 1 | 4932399389 | 4002395360062 |
| 20 | 600 | 550 | 1 | 1 | 4932352516 | 4002395371747 |
| 22 | 400 | 350 | 1 | 1 | 4932352517* | 4002395371754 |
| Concrete drill bits Ø 4 / 5 / 6 / 8 / 10 | | | 5 | 1 | 4932352333 | 4002395369928 |
| Concrete drill bits | | | | | | |
| convicto uniii bili | our (oho) | | 8 | 1 | 4932352334 | 4002395369935 |



1


2



Concrete super drill bits - round shank - DIN 8039

These high quality concrete drill bits have a unique shaped drill head with centering point and a H-spiral flute for maximum drilling speed and longer lifetime in hard materials such as concrete, aerated concrete blocks, masonry, natural stone, artificial stone, ceramic tile, slate and granite.

From \emptyset 12 mm the drill bits are supplied with a multi-flat shank to prevent the drill bit slipping in the chuck. Made in Germany.



| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------------------|-------------------------------------|--------------------------|---------------|---------------------|----------------|---------------|
| 3 | 70 | 40 | 1 | 1 | 4932399394 | 4002395360116 |
| 4 | 85 | 50 | 1 | 1 | 4932399395 | 4002395360123 |
| 5 | 85 | 50 | 1 | 1 | 4932399396 | 4002395360130 |
| 5.5 | 85 | 50 | 1 | 1 | 4932399397 | 4002395360147 |
| 6 | 100 | 60 | 1 | 1 | 4932399398 | 4002395360154 |
| 6.5 | 100 | 60 | 1 | 1 | 4932399399 | 4002395360161 |
| 7 | 100 | 60 | 1 | 1 | 4932399400 | 4002395360178 |
| 8 | 120 | 80 | 1 | 1 | 4932399401 | 4002395360185 |
| 9 | 120 | 80 | 1 | 1 | 4932399402 | 4002395360192 |
| 10 | 120 | 80 | 1 | 1 | 4932399403 | 4002395360208 |
| 12 | 150 | 90* | 1 | 1 | 4932399404 | 4002395360215 |
| 14 | 150 | 90* | 1 | 1 | 4932399405 | 4002395360222 |
| 15 | 160 | 100* | 1 | 1 | 4932399406 | 4002395360239 |
| 16 | 160 | 100* | 1 | 1 | 4932399407 | 4002395360246 |
| 18 | 160 | 100* | 1 | 1 | 4932399408 | 4002395360253 |
| 20 | 160 | 100* | 1 | 1 | 4932399409 | 4002395360260 |
| Concrete super 0 4/5/6/8/1 | drill bits set (5pc) 0 mm | | 5 | 1 | 4932352336 | 4002395369959 |
| Concrete super Ø 4 / 5 / 5.5 / 6 | drill bits set (7pc) | | 7 | 1 | 4932352337 | 4002395369966 |






1



Multi material drill bits

These tungsten carbide tipped (TCT) drill bits will drill in metal, wood and stone rotary mode only. Hammer action cannot be used with these drill bits.

Ideal for tradesmen who need to drill through a variety of materials in one go. Made in Germany.





| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---------------------|-----------------------|------------------|---------------------|----------------|---------------|
| 3 | 70 | 40 | 1 | 1 | 4932430147 | 4002395378081 |
| 4 | 85 | 50 | 1 | 1 | 4932430148 | 4002395378098 |
| 5 | 85 | 50 | 1 | 1 | 4932430149 | 4002395378104 |
| 5.5 | 85 | 50 | 1 | 1 | 4932430150 | 4002395378111 |
| 5.5 | 150 | 90 | 1 | 1 | 4932430151 | 4002395378128 |
| 6 | 100 | 60 | 1 | 1 | 4932430152 | 4002395378135 |
| 6 | 150 | 90 | 1 | 1 | 4932430153 | 4002395378142 |
| 6 | 200 | 150 | 1 | 1 | 4932430154 | 4002395378159 |
| 6.5 | 150 | 90 | 1 | 1 | 4932430155 | 4002395378166 |
| 6.5 | 200 | 150 | 1 | 1 | 4932430156 | 4002395378173 |
| 7 | 100 | 60 | 1 | 1 | 4932430157 | 4002395378180 |
| 8 | 120 | 80 | 1 | 1 | 4932430158 | 4002395378197 |
| 8 | 250 | 200 | 1 | 1 | 4932430159 | 4002395378203 |
| 10 | 120 | 80 | 1 | 1 | 4932430160 | 4002395378210 |
| 10 | 250 | 200 | 1 | 1 | 4932430161 | 4002395378227 |
| 12 | 150 | 90 | 1 | 1 | 4932430162 | 4002395378234 |
| ① Multi material drill bit set (7pc) 0 3 / 4 / 5 / 6 / 6 / 8 / 10 mm | | | 7 | 1 | 4932352335 | 4002395369942 |
| Multi material drill bit set (7pc) Ø 4 / 5 / 5.5 / 6 / 7 / 8 / 10 mm | | | 7 | 1 | 4932352836 | 4002395374946 |

Glass & tile bits

Suitable for glass, tiles, mirrors, ceramics. Made in Germany.



| Diameter (mm) | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|------------------|---------------------|----------------|---------------|
| 3 | 90 | 1 | 1 | 4932399393 | 4002395360109 |
| 4 | 90 | 1 | 1 | 4932363884 | 4002395333585 |
| 5 | 90 | 1 | 1 | 4932363885 | 4002395333592 |
| 6 | 90 | 1 | 1 | 4932363886 | 4002395333608 |
| 8 | 95 | 1 | 1 | 4932363887 | 4002395333615 |
| 10 | 100 | 1 | 1 | 4932363888 | 4002395333622 |



Impact rated wood auger bits

Suitable for use with all types of corded / cordless drills including impact wrenches.

Drilling with an impact wrench enables drilling holes with less effort, one hand drilling, drilling up a ladder and above head height with less risk of injury from the tool clutching out.

Special zone hardening process ensures an extra hard shank, durable tip and perfectly flexible bit body.

New MILWAUKEE® Through-Center head geometry with the lead cutting edge lines up with the center of the feed screw - this ensures efficient chip removal and allows for continuous feeding.

20° rake angle of the lead cutting edge creates a path for easy chip ejection.

Polished and powder coated flute design produces a non-stick surface for increased chip ejection, reduced chip clogging and higher selfeeding capability.

Milling marks are removed in the finishing process, creating a smooth surface.

Lewis flute with large, wide throat design for rapid chip removal.

Sharp ground cutting lips for smooth clean holes.


Resharpenable cutting lips.

With 7/16" shank - to fit square drive 1/2" impact wrenches the adaptor 48660061 is required.

Suitable for hard & soft wood, wet & treated wood, plywood, chipboard, WPC (wood plastic composite), laminated beams and panels, exotic and hard woods e.g. bongossi, iroko, teak, beech, oak, etc.



Impact rated wood auger bits - short series



Special short design enables drilling in tight and normally non accessible places.

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Shank reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|---------------------|-----------------------|-----------------|------------------|---------------------|----------------|--------------|
| 18 | 153 | 100 | 7/16" Hex | 1 | 1 | 48130683 | 045242091379 |
| 20 | 153 | 100 | 7/16" Hex | 1 | 1 | 48130813 | 045242091522 |
| 22 | 153 | 100 | 7/16" Hex | 1 | 1 | 48130873 | 045242091638 |
| 25 | 153 | 100 | 7/16" Hex | 1 | 1 | 48131003 | 045242091782 |
| 28 | 153 | 100 | 7/16" Hex | 1 | 1 | 48131123 | 045242091935 |
| 32 | 153 | 100 | 7/16" Hex | 1 | 1 | 48131253 | 045242092031 |

Impact rated wood auger bits - long series



| Diameter (mm) | Total length (mm) A | Working length (mm) B | Shank reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|---------------------|-----------------------|-----------------|------------------|---------------------|----------------|--------------|
| 14 | 460 | 395 | 7/16" Hex | 1 | 1 | 48136754 | 045242518999 |
| 16 | 460 | 395 | 7/16" Hex | 1 | 1 | 48136756 | 045242519002 |
| 18 | 460 | 395 | 7/16" Hex | 1 | 1 | 48136758 | 045242500994 |
| 19 | 460 | 395 | 7/16" Hex | 1 | 1 | 48136759 | 045242519019 |
| 20 | 460 | 395 | 7/16" Hex | 1 | 1 | 48136760 | 045242501007 |
| 22 | 460 | 395 | 7/16" Hex | 1 | 1 | 48136762 | 045242519033 |
| 26 | 460 | 395 | 7/16" Hex | 1 | 1 | 48136766 | 045242004102 |
| 29 | 460 | 395 | 7/16" Hex | 1 | 1 | 48136769 | 045242519057 |
| 4 pc set available in a pc Ø 14 / 16 / 18 / 20 x 460 pc | | | | 4 | 1 | 48136780 | 045242005383 |

System accessories


| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|--------------|
| Adaptor: 1/2" square drive to 7/16" and Hex 11 mm. For use with 7/16" selfeed bits and impact auger bits | 1 | 1 | 48660061 | 045242155118 |



Wood drilling speeds

The following tables give recommended drilling speeds for the most efficient cutting speed. The tables should only be used as a guide and are dependant on the user and material being drilled.


Auger bits

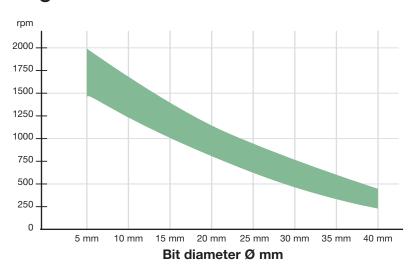





Forstner bits/Selfeed bits

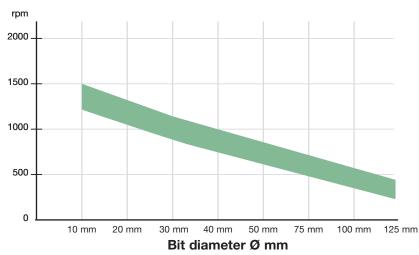






Wood auger bits

For heavy duty, precision drilling in soft and hard wood, large section beams, joists, floor boarding, chipboard and plywood. Lewis flute design for rapid chip removal.

With Hex shank for secure chuck grip.




| Diameter (mm) | Total length (mm) A | Working length (mm) B | Shank reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------|---------------------|-----------------------|-----------------|------------------|---------------------|----------------|---------------|
| 6 | 230 | 155 | 6.5 mm Hex | 1 | 1 | 4932430175 | 4002395378364 |
| 6 | 460 | 385 | 6.5 mm Hex | 1 | 1 | 4932430176 | 4002395378371 |
| 8 | 230 | 155 | 6.5 mm Hex | 1 | 1 | 4932363681 | 4002395331796 |
| 8 | 460 | 385 | 6.5 mm Hex | 1 | 1 | 4932363688 | 4002395331710 |
| 10 | 230 | 155 | 8.5 mm Hex | 1 | 1 | 4932363682 | 4002395331802 |
| 10 | 460 | 385 | 8.5 mm Hex | 1 | 1 | 4932363689 | 4002395331727 |
| 10 | 600 | 530 | 8.5 mm Hex | 1 | 1 | 4932363696 | 4002395331642 |
| 12 | 230 | 155 | 10 mm Hex | 1 | 1 | 4932363683 | 4002395331819 |
| 12 | 460 | 385 | 10 mm Hex | 1 | 1 | 4932363690 | 4002395331734 |
| 12 | 600 | 530 | 10 mm Hex | 1 | 1 | 4932363697 | 4002395331659 |
| 14 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932363684 | 4002395331826 |
| 14 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932363691 | 4002395331741 |
| 14 | 600 | 530 | 11 mm Hex | 1 | 1 | 4932363698 | 4002395331666 |
| 16 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932363685 | 4002395331833 |
| 16 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932363692 | 4002395331758 |
| 16 | 600 | 530 | 11 mm Hex | 1 | 1 | 4932363699 | 4002395331673 |
| 18 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932363686 | 4002395331840 |
| 18 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932363693 | 4002395331765 |
| 18 | 600 | 530 | 11 mm Hex | 1 | 1 | 4932363700 | 4002395331680 |
| 20 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932363687 | 4002395331857 |
| 20 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932363694 | 4002395331772 |
| 20 | 600 | 530 | 11 mm Hex | 1 | 1 | 4932363701 | 4002395331697 |
| 22 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932373363 | 4002395347889 |
| 22 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932363695 | 4002395331789 |
| 22 | 600 | 530 | 11 mm Hex | 1 | 1 | 4932363702 | 4002395331703 |
| 24 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932373364 | 4002395347896 |
| 24 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932373370 | 4002395348558 |
| 26 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932373365 | 4002395348503 |
| 26 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932373371 | 4002395348565 |
| 28 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932373366 | 4002395348510 |
| 28 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932373372 | 4002395348572 |
| 30 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932373367 | 4002395348527 |
| 30 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932373373 | 4002395348589 |
| 32 | 230 | 155 | 11 mm Hex | 1 | 1 | 4932373368 | 4002395348534 |
| 32 | 460 | 385 | 11 mm Hex | 1 | 1 | 4932373374 | 4002395348596 |
| Wood auger bits set (6pc | | | Wood case | 6 | 1 | 4932373380 | 4002395349258 |



Forstner bits

Centre point for precisely locating the bit. Peripheral cutters ensure splinter free drilling in all natural soft and hard woods. Manufactured according to DIN 74836. Suitable for heavy-duty applications in all natural, soft and hard woods.





| Diameter (mm) | Total length (mm) A | Working length (mm) B | Shank reception | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|------------------------------|---------------------|-----------------------|--------------------|------------------|---------------------|----------------|---------------|--|
| 10 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363703 | 4002395331468 | |
| 12 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363704 | 4002395331475 | |
| 14 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363705 | 4002395331482 | |
| 15 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363883 | 4002395333738 | |
| 16 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363706 | 4002395331499 | |
| 18 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363707 | 4002395331505 | |
| 20 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363708 | 4002395331512 | |
| 25 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363711 | 4002395331543 | |
| 26 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363712 | 4002395331550 | |
| 30 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363714 | 4002395331574 | |
| 32 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363715 | 4002395331581 | |
| 35 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363717 | 4002395331604 | |
| 40 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932363720 | 4002395331635 | |
| 50 | 90 | 50 | 9.5 mm round shank | 1 | 1 | 4932373923 | 4002395353538 | |
| Forstner drill bits set (5pc | • | | | 5 | 1 | 4932373379 | 4002395349241 | |



SWITCHBLADE™ selfeed bits

Speed: Aggressive feed screw design allows the bit to pull through the wood faster and without effort, resulting in faster drilling.

Replaceable SWITCHBLADE™: The SWITCHBLADE™ replaceable blade system ensures your blade is always razor sharp. It increases productivity by eliminating resharpening downtime and it increases the overall life of the bit.

Application: Suitable for all general contractors, electricians, plumbers and HVAC engineers who require to drill through holes in wood for all types of pipe, vents and wire trunking.

Each selfeed bit is supplied with 2x blades, 2x replaceable feed screws, 2x set screws and 1x allen key.



| Diameter (mm) | Shank reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|-----------------|------------------|---------------------|----------------|--------------|
| 35 | 7/16" Hex | 1 | 1 | 48255120 | 045242157471 |
| 38 | 7/16" Hex | 1 | 1 | 48255125 | 045242157488 |
| 51 | 7/16" Hex | 1 | 1 | 48255135 | 045242157495 |
| 54 | 7/16" Hex | 1 | 1 | 48255140 | 045242157525 |
| 57 | 7/16" Hex | 1 | 1 | 48255143 | 045242225903 |
| 65 | 7/16" Hex | 1 | 1 | 48255150 | 045242157532 |



SWITCHBLADE™ set

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|--------------|
| SWITCHBLADE™ selfeed bits set (5pc) 4 x SWITCHBLADE™ selfeed bits: Ø 35 / 38 / 54 / 65 mm, QUIK-LOK extension 140 mm length, 4 x Replacement SWITCHBLADE™ blades (1 for each size bit), 4 x feed screws, 4 x set screws, 1 x allen key | 5 | 1 | 49225100 | 045242157686 |



SWITCHBLADE™ replacement blades

| Diameter (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|--------------|
| 35 | 1 | 1 | 48255420 | 045242225842 |
| 38 | 1 | 1 | 48255425 | 045242225859 |
| 51 | 1 | 1 | 48255435 | 045242225866 |
| 54 | 1 | 1 | 48255440 | 045242225873 |
| 57 | 1 | 1 | 48255443 | 045242225880 |
| 65 | 1 | 1 | 48255450 | 045242226474 |
| SWITCHBLADE™ service kit in storage container | | | | |
| 1x feed screw, 2x set screws, 1x allen key, 1x storage container also can store spare SWITCHBLADE™ | 5 | 1 | 48255280 | 045242225934 |



Selfeed bits

All sizes have removable and replaceable feed screws.

Two feed screws supplied with each bit.

Feed screw provides fast, effortless feeding even in gummy woods.

Internal cutting plane shaves hole radius for clean, smooth holes without pressure.

Each selfeed bit is supplied with 2 x feed screws, 1 x set screw and 1 x allen key.

| Diameter (mm) Si | hank reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------------------|----------------|------------------|---------------------|----------------|--------------|
| 25 | 7/16" Hex | 1 | 1 | 48251002 | 045242119028 |
| 29 | 7/16" Hex | 1 | 1 | 48251122 | 045242119073 |
| 32 | 7/16" Hex | 1 | 1 | 48251252 | 045242119127 |
| 35 | 7/16" Hex | 1 | 1 | 48251372 | 045242119172 |
| 38 | 7/16" Hex | 1 | 1 | 48251502 | 045242119226 |
| 44 | 7/16" Hex | 1 | 1 | 48251752 | 045242119271 |
| 51 | 7/16" Hex | 1 | 1 | 48252002 | 045242119325 |
| 54 | 7/16" Hex | 1 | 1 | 48252122 | 045242119370 |
| 57 | 7/16" Hex | 1 | 1 | 48252252 | 045242119424 |
| 65 | 7/16" Hex | 1 | 1 | 48252562 | 045242119479 |
| Feed screw coarse thread 1/4" | | 1 | 1 | 48286870 | 045242122707 |
| Allen key 1/8" for all arbors | | 1 | 1 | 49960060 | 045242221455 |
| Set screw for drills up to 65 mm | | 1 | 1 | 06832625 | - |



Large selfeed bits

Large selfeed bits in 76, 92 and 116 mm sizes have double internal cutter blades that shave hole radius for clean, smooth holes without pressure.

Replaceable arbor.

| Diameter (mm) | Shank reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------------|-----------------|------------------|---------------------|----------------|--------------|
| 76 | 1 milled flats | 1 | 1 | 48253001 | 045242119509 |
| 92 | 1 milled flats | 1 | 1 | 48253621 | 045242119554 |
| 116 | 1 milled flats | 1 | 1 | 48254621 | 045242119608 |
| Replaceable arbor | | 1 | 1 | 48070201 | 045242088904 |
| Feed screw regular thread | | 1 | 1 | 48286880 | 045242122806 |
| Set screw for drills up over 7 | 76mm | 1 | 1 | 06833150 | - |
| Allen key 5/32" | | 1 | 1 | 49960070 | 045242221554 |



Selfeed bits contractors kit

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|--------------|
| Contractors kit (7pc) | | | | |
| Selfeed bits Ø 25 / 29 / 32 / 38 / 44 / 54 / 65 mm, extension 140 mm length and feed screws | 7 | 1 | 49220130 | 045242180301 |



Shank extensions

For selfeed bits, auger bits and holesaws (25 mm / 1" diameter and larger) with $^{7}/_{16}\!\!^{''}$ Hex shank

| | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---------------------|------------------|---------------------|----------------|--------------|
| 1 | 140 | 1 | 1 | 48281030 | 045242122653 |
| | 300 | 1 | 1 | 48284006 | 045242122516 |
| 2 | 450 | 1 | 1 | 48284011 | 045242122561 |
| | 600 | 1 | 1 | 48284016 | 045242122615 |



Lip & spur / brad point bits for wood - DIN 7487 E

Suitable for drilling hardboard, plywood, chipboard and all natural hard and soft wood. Produced according to DIN 7487 E.







| Diameter (mm) | Total length (mm) A | Working length (mm) B | Shank reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---------------------|--------------------------|-------------------|------------------|---------------------|----------------|---------------|
| 3 | 60 | 33 | 3 mm round shank | 1 | 1 | 4932363651 | 4002395331307 |
| 4 | 75 | 43 | 4 mm round shank | 1 | 1 | 4932363652 | 4002395331314 |
| 5 | 86 | 52 | 5 mm round shank | 1 | 1 | 4932363653 | 4002395331321 |
| 6 | 97 | 60 | 6 mm round shank | 1 | 1 | 4932363654 | 4002395331338 |
| 7 | 109 | 69 | 7 mm round shank | 1 | 1 | 4932363655 | 4002395331345 |
| 8 | 117 | 75 | 8 mm round shank | 1 | 1 | 4932363656 | 4002395331352 |
| 9 | 125 | 80 | 9 mm round shank | 1 | 1 | 4932363657 | 4002395331369 |
| 10 | 133 | 87 | 10 mm round shank | 1 | 1 | 4932363658 | 4002395331376 |
| 11 | 142 | 89 | 10 mm round shank | 1 | 1 | 4932363659 | 4002395331383 |
| 12 | 151 | 96 | 10 mm round shank | 1 | 1 | 4932363660 | 4002395331390 |
| 13 | 151 | 96 | 10 mm round shank | 1 | 1 | 4932363661 | 4002395331406 |
| 14 | 151 | 97 | 10 mm round shank | 1 | 1 | 4932363662 | 4002395331413 |
| 15 | 151 | 97 | 10 mm round shank | 1 | 1 | 4932363663 | 4002395331420 |
| 16 | 151 | 97 | 10 mm round shank | 1 | 1 | 4932363664 | 4002395331437 |
| 18 | 180 | 120 | 10 mm round shank | 1 | 1 | 4932363665 | 4002395331444 |
| 20 | 200 | 130 | 10 mm round shank | 1 | 1 | 4932363666 | 4002395331451 |
| Wood drill bit set (5pc) 0 4/5/6/8/10 mm | | | Plastic cassette | 5 | 1 | 4932352465 | 4002395371242 |
| Wood drill bit set (8pc) 0 3/4/5/6/7/8/9/1 | 0 mm | | Plastic cassette | 8 | 1 | 4932352466 | 4002395371259 |



Flat boring bits

Fast drilling of big diameters.

Suitable for drilling in natural hard and softwood and chipboard.

Ideal for door locks, morticing, electrical and plumbing work.

 $^{1/4}$ " Hex shank reception (DIN E 6.3) for direct insertion into the power tool or for secure chuck grip. Ground centre point for accurate positioning and sharp wings for improved cutting performance.






1

| Diameter (mm) | Total length (mm) A | Pack | Min. order | Article Number | EAN Code | |
|---|-------------------------|----------|------------|------------------|---------------|--|
| Diameter (mm) | iotai iengtii (iiiii) A | quantity | quantity | Article Mulliper | EAN GUUE | |
| 6 | 152 | 1 | 1 | 4932352487 | 4002395371457 | |
| 6 | 400 | 1 | 1 | 4932352488 | 4002395371464 | |
| 8 | 152 | 1 | 1 | 4932363130 | 4002395332618 | |
| 8 | 400 | 1 | 1 | 4932352489 | 4002395371471 | |
| 10 | 152 | 1 | 1 | 4932363131 | 4002395332625 | |
| 10 | 400 | 1 | 1 | 4932352490 | 4002395371488 | |
| 12 | 152 | 1 | 1 | 4932363132 | 4002395332632 | |
| 12 | 400 | 1 | 1 | 4932352491 | 4002395371495 | |
| 13 | 152 | 1 | 1 | 4932363133 | 4002395332649 | |
| 13 | 400 | 1 | 1 | 4932352492 | 4002395371501 | |
| 14 | 152 | 1 | 1 | 4932363134 | 4002395332656 | |
| 14 | 400 | 1 | 1 | 4932352493 | 4002395371518 | |
| 16 | 152 | 1 | 1 | 4932363135 | 4002395332663 | |
| 16 | 400 | 1 | 1 | 4932352494 | 4002395371525 | |
| 18 | 152 | 1 | 1 | 4932363136 | 4002395332670 | |
| 18 | 400 | 1 | 1 | 4932352495 | 4002395371532 | |
| 19 | 152 | 1 | 1 | 4932363137 | 4002395332687 | |
| 19 | 400 | 1 | 1 | 4932352496 | 4002395371549 | |
| 20 | 152 | 1 | 1 | 4932363138 | 4002395332694 | |
| 20 | 400 | 1 | 1 | 4932352497 | 4002395371556 | |
| 22 | 152 | 1 | 1 | 4932363139 | 4002395332700 | |
| 22 | 400 | 1 | 1 | 4932352498 | 4002395371563 | |
| 24 | 152 | 1 | 1 | 4932363140 | 4002395332717 | |
| 25 | 152 | 1 | 1 | 4932363141 | 4002395332724 | |
| 25 | 400 | 1 | 1 | 4932352499 | 4002395371570 | |
| 26 | 152 | 1 | 1 | 4932363142 | 4002395332731 | |
| 28 | 152 | 1 | 1 | 4932363143 | 4002395332748 | |
| 28 | 400 | 1 | 1 | 4932352500 | 4002395371587 | |
| 30 | 152 | 1 | 1 | 4932363144 | 4002395332755 | |
| 30 | 400 | 1 | 1 | 4932352501 | 4002395371594 | |
| 32 | 152 | 1 | 1 | 4932363145 | 4002395332762 | |
| 32 | 400 | 1 | 1 | 4932352502 | 4002395371600 | |
| 35 | 400 | 1 | 1 | 4932352503 | 4002395371617 | |
| 36 | 152 | 1 | 1 | 4932363146 | 4002395332779 | |
| 38 | 152 | 1 | 1 | 4932363147 | 4002395332786 | |
| Flat bit set (8pc) 0 12 / 16 / 18 / 20 /22 / 25 /28 / 32 x 152 mm length | | 8 | 1 | 4932352504 | 4002395371624 | |

Extension




| Description | Total length (mm) A | Shank reception | Tool reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------|---------------------|-----------------|----------------|------------------|---------------------|----------------|---------------|
| Extension | 305 | 1/4" Hey | 1/4" Hex | 1 | 1 | 4932363148 | 4002395332793 |

SPEED FEED™ wood drill bits

Step up from flat bit in quality and performance - faster drilling, higher lifetime and less jamming! Dual cutting edges for fast and aggressive cut - up to 10 times faster drilling vs. flat boring bit. Tapered design for reduced chip clogging, less friction and less jamming even in tough applications - results in less breakages.

Feed screw with coarse thread increases selfeeding in all types of wood - soft & hard, wet & treated. Polished and powder coated flute design for increased chip ejection, reduced clogging and higher selfeeding capability.



| C | Diameter (mm) | Ø (inch) | Total length (mm) A | Shank reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|----------------------------|----------|---------------------------|-----------------|------------------|---------------------|----------------|---------------|
| | 13 | 1/2" | 165 | 1⁄4" Hex | 1 | 1 | 48130048 | 045242224807 |
| | 16 | 5/8" | 165 | 1/4" Hex | 1 | 1 | 48130058 | 045242224814 |
| | 18 | 3/4" | 165 | 1⁄4" Hex | 1 | 1 | 4932464071 | 4058546220167 |
| | 20 | 3/4" | 165 | 1⁄4" Hex | 1 | 1 | 48130068 | 045242224821 |
| | 22 | 7/8" | 165 | 1⁄4" Hex | 1 | 1 | 48130078 | 045242224838 |
| | 25 | 1" | 165 | 1⁄4" Hex | 1 | 1 | 48130088 | 045242224845 |
| | 32 | 1 1/4" | 165 | 1⁄4" Hex | 1 | 1 | 48130108 | 045242224852 |
| | PEED FEED™ 13 / 16 / 20 | ` ' ' | | | 4 | 1 | 48130400 | 045242234448 |






Dual cutting edges



Tapered design

HSS cable bits - DIN 7490

Manufactured from HSS steel for increased lifetime. Suitable for drilling through holes in wood, plasterboard and metal channel. Manufactured according to DIN 7490 and conforming to the German Employer's Liability Insurance Association in terms of safety requirements for the building trade. The body of the drill bit is attached to the cylindrical shank by means of a thread, therefore eliminating the risk of breakage and guaranteeing absolute concentricity. The small twist angle and enlarged flutes ensure rapid and clog-free chip removal. Made in Germany.



| † | | | -В | | | | |
|---------------|---------------------|-----------------------|-------------------|------------------|---------------------|----------------|---------------|
| Diameter (mm) | Total length (mm) A | Working length (mm) B | Shank reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
| 6 | 400 | 300 | 5 mm round shank | 1 | 1 | 4932399672 | 4002395363223 |
| 6 | 600 | 500 | 5 mm round shank | 1 | 1 | 4932399675 | 4002395363254 |
| 8 | 400 | 300 | 6 mm round shank | 1 | 1 | 4932363667 | 4002395331932 |
| 8 | 600 | 500 | 6 mm round shank | 1 | 1 | 4932363674 | 4002395331864 |
| 10 | 400 | 300 | 8 mm round shank | 1 | 1 | 4932363668 | 4002395331949 |
| 10 | 600 | 500 | 8 mm round shank | 1 | 1 | 4932363675 | 4002395331871 |
| 12 | 400 | 300 | 8 mm round shank | 1 | 1 | 4932363669 | 4002395331956 |
| 12 | 600 | 500 | 8 mm round shank | 1 | 1 | 4932363676 | 4002395331888 |
| 14 | 400 | 300 | 8 mm round shank | 1 | 1 | 4932363670 | 4002395331963 |
| 14 | 600 | 500 | 8 mm round shank | 1 | 1 | 4932363677 | 4002395331895 |
| 16 | 400 | 300 | 10 mm round shank | 1 | 1 | 4932363671 | 4002395331970 |
| 16 | 600 | 500 | 10 mm round shank | 1 | 1 | 4932363678 | 4002395331901 |
| 18 | 400 | 300 | 10 mm round shank | 1 | 1 | 4932363672 | 4002395331987 |
| 18 | 600 | 500 | 10 mm round shank | 1 | 1 | 4932363679 | 4002395331918 |
| 20 | 400 | 300 | 10 mm round shank | 1 | 1 | 4932363673 | 4002395331994 |
| 20 | 600 | 500 | 10 mm round shank | 1 | 1 | 4932363680 | 4002395331925 |
| 22 | 400 | 300 | 10 mm round shank | 1 | 1 | 4932399673 | 4002395363230 |
| 22 | 600 | 500 | 10 mm round shank | 1 | 1 | 4932399676 | 4002395363261 |



HSS Drill bit tip geometry

| . • | | | |
|-----|---|--|--|
| | Standard/Form | Application | Features |
| | Normal Standard Point | For standard drilling in ferrous/non ferrous metals and plastics | The wide cutting edge provides a drill bit that is robust and resistant to sidewards pressure. Due to the wide cutting edge higher feed pressure is required. Can be easily resharpened. |
| | Chisel Edge Point DIN 1412 A | For drilling work in solid steel with large diameter drill bits. | Good and easy centering. Requires very low feed pressure – approx. 30% less than a normal point drill bit. |
| | Chisel Edge Point with corrected cutting edge DIN 1412 B | For drilling in high strength steel and high alloy steels. Also suitable for drilling thin sheet material. | Robust and resistant to sidewards pressure. |
| | Split Point DIN 1412 C | For drilling in high strength steel and high alloy steels. Suitable for deep drilling bits. | Excellent chip removal makes this design ideal for deep drilling applications. Good centering. Low feed pressure required. |
| | Double Angle Point for Cast Iron DIN 1412 D | For drilling cast iron. | Extended major curring edges reduce wear on the cutting corners for improved lifetime. Good heat conduction. Resistant to sidewards pressure. |
| | Centre Point DIN 1412 E | For drilling thin sheet metal and soft materials. | Easy centering. Low feed pressure required. Does not snatch when drilling thin materials. Accurate and clean holes. |
| | U Point | For high performance drilling in high strength steels such as stainless and acid resistant steel. | Easy centering. Produces small metal chips ensuring low heat build up and quicker material resulting in faster drilling. |

HSS Drill bit application guide

The following table gives recommended drilling speeds for the most efficient cutting speed.

The tables should only be used as a guide and are dependant on the user and material being drilled.

Coolants and lubricants will improve tool life by up to 5 times and workpiece finish.

| | | | | | | Hole dian | neter Ø n | nm – RPN | 1 | |
|--------------------|-------|---|--|----------------------|--------------|--------------|------------|------------|------------|-------------------------------|
| Material class | | Material type | Hardness / Tensile Strength N/mm² | Rockwell | Ø 1-2 | Ø 3-5 | Ø 6–10 | Ø 11–15 | Ø 16-20 | Cooling agent |
| | | Non-alloyed construc- tion steel, non-alloyed case hardened steel | < 400 400-800 | < HRB 69 < HRC 21 | 4770 4450 | 1870 1770 | 930 870 | 630 580 | 470 430 | Drilling emulsion cutting oil |
| | | Sheet Steel | < 800 | < HRC 21 | 4450 | 1760 | 860 | 560 | 430 | Drilling emulsion ester oil |
| Steel | Speed | Non-alloyed tool steel | < 800 | < HRC 21 | 4440 | 1760 | 860 | 560 | 430 | Drilling emulsion cutting oil |
| Steel | | Allaccadita al ata al | < 800 | < HRC 21 | 3950 | 1550 | 780 | 520 | 390 | Drilling emulsion |
| | | Alloyed tool steel | > 800 | > HRC 21 | 1950 | 800 | 390 | 275 | 200 | ester oil |
| | | Alloyed hardened | < 1200 | < HRC 37 | 2100 | 890 | 450 | 300 | 210 | Drilling emulsion |
| | | & tempered steel | > 1200 | > HRC 38 | 1350 | 540 | 260 | 170 | 120 | ester oil |
| | Feed | Feed (mm/rev) | | | 0.03 | 0.09 | 0.15 | 0.20 | 0.25 | |
| | | Stainless steel | < 1000 | < HRC 30 | 2250 | 930 | 450 | 290 | 220 | Rapeseed oil, |
| Stainless steel | Speed | Stainless steel | 1000-1200 | HRC 30-37 | 1430 | 560 | 280 | 190 | 130 | cutting oil |
| | Feed | Feed (mm/rev) | | | 0.02 | 0.06 | 0.13 | 0.18 | 0.24 | |
| | | Malleable cast iron | 750 | HRB 99 | 4700 | 2000 | 1100 | 800 | 600 | Dry |
| | Speed | Soft | 450 | HRB 75 | 4500 | 1700 | 950 | 650 | 550 | Drilling emulsion |
| Cast iron | | Hard | 700 | HRB 96 | 3450 | 1350 | 680 | 440 | 340 | cutting oil |
| | Feed | Feed (mm/rev) | | | 0.05 | 0.10 | 0.16 | 0.20 | 0.25 | |
| Aluminium | Speed | | < 350 | < HRC 59 | 8700 | 3560 | 1720 | 1130 | 860 | Drilling emulsion cutting oil |
| | Feed | Feed (mm/rev) | | | 0.02 | 0.08 | 0.13 | 0.18 | 0.23 | |
| Copper | Speed | | | | 5100 | 2000 | 990 | 670 | 500 | Drilling emulsion cutting oil |
| Соррсі | Feed | Feed (mm/rev) | | | 0.02 | 0.10 | 0.20 | 0.28 | 0.35 | |
| Bronze | Speed | | | | 7950 | 3190 | 1480 | 1010 | 770 | Dry |
| 2.020 | Feed | Feed (mm/rev) | | | 0.02 | 0.11 | 0.21 | 0.32 | 0.35 | |
| Brass | Speed | | | | 7950 | 3190 | 1480 | 1010 | 770 | Drilling emulsion |
| | Feed | Feed (mm/rev) | | | 0.02 | 0.11 | 0.21 | 0.32 | 0.35 | |
| Magnesium | Speed | | | | 9550 | 3800 | 1900 | 1250 | 970 | Dry |
| | Feed | Feed (mm/rev) | | | 0.05 | 0.10 | 0.25 | 0.30 | 0.35 | |
| Plastics | Speed | PVC, Polyamide, Thermoplastics | | | 3500 | 2500 | 1800 | 700 | 450 | Water |
| | Feed | Feed (mm/rev) | | | 0.05 | 0.10 | 0.16 | 0.21 | 0.23 | |

RPM: The number of revolutions that a spindle/a cutting tool completes in one minute.

Feed: This is the linear distance at which the cutter is advanced against the workpiece during one rotation of the cutting tool.

It is expressed in units of distance per revolution – millimetres per revolution.

HSS Drill bit application guide

| Material class | Material type | Hardness/ Tensile Strength N/mm² | Rockwell | HSS-R DIN 338 | HSS-G Thunderweb DIN 338 DIN 340 DIN 1897 Double Ended | RED COBALT – HSS-Ground - DIN 338 RED HEX – Shockwave HSS- Ground Titanium | Step drills | Cooling agent |
|----------------|--|--|-----------|---------------|--|--|-------------|--------------------------------|
| | Non-alloyed construction steel, non-alloyed case | < 400 | < HRB 69 | | • | • | • | Drilling emulsion, |
| | hardened steel | 400-800 | < HRC 21 | • | • | • | • | cutting oil |
| | Sheet Steel | < 800 | < HRC 21 | | • | • | • | Drilling emulsion, ester oil |
| Steel | Non-alloyed tool steel | < 800 | < HRC 21 | • | • | • | • | Drilling emulsion, cutting oil |
| | Alloyed tool steel | < 800 | < HRC 21 | | • | • | • | Drilling emulsion, |
| | ,, 64 100. 6100. | > 800 | > HRC 21 | | • | • | A | ester oil |
| | Alloyed hardened | < 1200 | < HRC 37 | | | • | A | Drilling emulsion, |
| | & tempered steel | > 1200 | > HRC 38 | | | • | A | ester oil |
| Stainless | Stainless steel | < 1000 | < HRC 30 | | A | • | A | Rapeseed oil, |
| steel | Stainless steel | 1000-1200 | HRC 30-37 | | | • | A | cutting oil |
| | Malleable cast iron | 750 | HRB 99 | • | • | • | • | Dry |
| Cast iron | Soft | 450 | HRB 75 | • | • | • | • | Drilling emulsion, |
| | Hard | 700 | HRB 96 | • | • | • | • | cutting oil |
| Aluminium | | < 350 | < HRC 59 | | A | • | • | Drilling emulsion, cutting oil |
| Copper | | | | | A | • | • | Drilling emulsion, cutting oil |
| Bronze | | | | • | • | • | • | Dry |
| Brass | | | | • | • | • | • | Drilling emulsion |
| Magnesium | | | | | | • | | Dry |
| Plastics | PVC, Polyamide, Thermoplastics | | | | • | • | • | Water |
| Wood | | | | • | • | • | | Dry |

Metal drill bits HSS Rollforged -DIN 338 with reduced shank

High speed steel rollforged metal drill bits produced according to DIN 338.

Oxide coating enables quick swarf removal.

Normal point shaped cutting tip with 118° angle.


Type N flute normal angle.

Suitable for drilling in steel, cast iron, alloyed and non-alloyed material up to 800 $\mbox{N/mm}^2.$

Colour: black.

 \emptyset 13.5 mm - \emptyset 16 mm = 10 mm shank / \emptyset 16.5 mm - \emptyset 20 mm = 13 mm shank.

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------------|--------------------------|------------------|---------------------|----------------|---------------|
| 13.5 | 160 | 108 | 1 | 1 | 4932373318 | 4002395348435 |
| 14.0 | 160 | 108 | 1 | 1 | 4932373319 | 4002395348442 |
| 14.5 | 169 | 108 | 1 | 1 | 4932373320 | 4002395348459 |
| 15.0 | 169 | 114 | 1 | 1 | 4932373321 | 4002395348466 |
| 15.5 | 178 | 120 | 1 | 1 | 4932373322 | 4002395348473 |
| 16.0 | 178 | 120 | 1 | 1 | 4932373323 | 4002395348480 |
| 16.5 | 184 | 125 | 1 | 1 | 4932373324 | 4002395348497 |
| 17.0 | 184 | 125 | 1 | 1 | 4932373325 | 4002395349104 |
| 17.5 | 191 | 130 | 1 | 1 | 4932373326 | 4002395349111 |
| 18.0 | 191 | 130 | 1 | 1 | 4932373327 | 4002395349128 |
| 18.5 | 198 | 135 | 1 | 1 | 4932373328 | 4002395349135 |
| 19.0 | 198 | 135 | 1 | 1 | 4932373329 | 4002395349142 |
| 19.5 | 205 | 140 | 1 | 1 | 4932373330 | 4002395349159 |
| 20.0 | 205 | 140 | 1 | 1 | 4932373331 | 4002395349166 |





Metal drill bits HSS rollforged - DIN 338 - cassettes

| Description | Supplied in | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|-------------|------------------|---------------------|----------------|---------------|
| HSS-R drill bits set (19pc) ① 01/1.5/2/2.5/3/3.5/4/4.5/5/5.5/6/6.5/7/7.5/8/8.5/9/9.5/10 mm | Metal case | 19 | 1 | 4932352468 | 4002395371273 |
| HSS-R drill bits set (25pc) Ø 1/1.5/2/2.5/3/3.5/4/4.5/ 5/5.5/6/6.5/7/7.5/8/8.5/9/ 9.5/10/10.5/11/11.5/12/12.5/ 13 mm | Metal case | 25 | 1 | 4932352469 | 4002395371280 |



Metal drill bits HSS rollforged -**DIN 338 - 5 and 10 pack**

High speed steel rollforged metal drill bits produced according to DIN 338.

Oxide coating enables quick swarf removal. Normal point shaped cutting tip with 118° angle.

Type N flute normal angle.

Suitable for drilling in steel, cast iron, alloyed and non-alloyed material up to 800 N/mm². Colour: black.

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------------|--------------------------|------------------|---------------------|----------------|---------------|
| 1.0 | 34 | 12 | 10 | 1 | 4932363444 | 4002395329458 |
| 1.5 | 40 | 18 | 10 | 1 | 4932363449 | 4002395329502 |
| 2.0 | 49 | 24 | 10 | 1 | 4932363454 | 4002395329557 |
| 2.5 | 57 | 30 | 10 | 1 | 4932363459 | 4002395329601 |
| 3.0 | 61 | 33 | 10 | 1 | 4932363464 | 4002395329656 |
| 3.2 | 65 | 36 | 10 | 1 | 4932363466 | 4002395329670 |
| 3.5 | 70 | 39 | 10 | 1 | 4932363469 | 4002395329700 |
| 4.0 | 75 | 43 | 10 | 1 | 4932363474 | 4002395329755 |
| 4.2 | 75 | 43 | 10 | 1 | 4932363476 | 4002395329779 |
| 4.5 | 80 | 47 | 10 | 1 | 4932363479 | 4002395329809 |
| 4.8 | 86 | 52 | 10 | 1 | 4932363482 | 4002395329830 |
| 5.0 | 86 | 52 | 10 | 1 | 4932363484 | 4002395329854 |
| 5.5 | 93 | 57 | 10 | 1 | 4932363489 | 4002395329908 |
| 6.0 | 93 | 57 | 10 | 1 | 4932363494 | 4002395329953 |
| 6.5 | 101 | 63 | 10 | 1 | 4932363499 | 4002395330003 |
| 6.8 | 109 | 69 | 10 | 1 | 4932363502 | 4002395330034 |
| 7.0 | 109 | 69 | 10 | 1 | 4932363504 | 4002395330058 |
| 7.5 | 109 | 69 | 10 | 1 | 4932363509 | 4002395330102 |
| 8.0 | 117 | 75 | 10 | 1 | 4932363514 | 4002395330157 |
| 8.5 | 117 | 75 | 10 | 1 | 4932363519 | 4002395330201 |
| 9.0 | 125 | 81 | 10 | 1 | 4932363524 | 4002395330256 |
| 9.5 | 125 | 81 | 10 | 1 | 4932363529 | 4002395330300 |
| 10.0 | 133 | 87 | 10 | 1 | 4932363534 | 4002395330355 |
| 10.5 | 133 | 87 | 5 | 1 | 4932363539 | 4002395330409 |
| 11.0 | 142 | 94 | 5 | 1 | 4932363544 | 4002395330454 |
| 11.5 | 142 | 94 | 5 | 1 | 4932363549 | 4002395330508 |
| 12.0 | 151 | 101 | 5 | 1 | 4932363554 | 4002395330553 |
| 12.5 | 151 | 101 | 5 | 1 | 4932363559 | 4002395330607 |
| 13.0 | 151 | 101 | 5 | 1 | 4932363564 | 4002395330652 |







Metal drill bits HSS rollforged -**DIN 338 - 345 pc cabinet**

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | IV |
|---|------------------------|--------------------------|------------------|----|
| Metal drill bit cab drill bits (345pc) | inet with HSS ro | ollforged metal | 345 | |
| 1.0 | 34 | 12 | 20 | |
| 1.5 | 40 | 18 | 20 | |
| 2 | 49 | 24 | 20 | |
| 2.5 | 57 | 30 | 20 | |
| 3 | 61 | 33 | 20 | |
| 3.5 | 70 | 39 | 20 | |
| 4 | 75 | 43 | 20 | |
| 4.5 | 80 | 47 | 20 | |
| 5 | 86 | 52 | 20 | |
| 5.5 | 93 | 57 | 20 | |
| 6 | 93 | 57 | 20 | |
| 6.5 | 101 | 63 | 20 | |
| 7 | 109 | 69 | 10 | |
| 7.5 | 109 | 69 | 10 | |
| 8 | 117 | 75 | 20 | |
| 8.5 | 117 | 75 | 10 | |
| 9 | 125 | 81 | 10 | |
| 9.5 | 125 | 81 | 5 | |
| 10 | 133 | 87 | 10 | |
| 10.5 | 133 | 87 | 5 | |
| 11 | 142 | 94 | 5 | |
| 11.5 | 142 | 94 | 5 | |
| 12 | 151 | 101 | 5 | |
| 12.5 | 151 | 101 | 5 | |
| 13 | 151 | 101 | 5 | |
| | | | | |

| Min. order quantity | Article Number | EAN Code |
|---------------------|----------------|---------------|
| 1 | 4932352674 | 4002395373321 |




THUNDERWEB

Metal drill bits HSS Ground - DIN 338



THUNDERWEB

The **THUNDERWEB** design is characterised by a conical shaped web which gets thicker towards the back of the drill bit. The web is the internal core of the drill bit.




Parabolic web cross section

- Large web thickness. Strength built in.
- Accepts higher feed pressure and torque.
- Less breakages.
 Good for drilling deep holes and on curved surfaces.
- Long life.



Standard drill bit

The web on standard drill bits is a constant thickness throughout the length of the bit.



Conventional type web cross section

THUNDERWEB SPECIFICATION

FLUTE GEOMETRY

- THUNDERWEB flute form ejects hot chips rapidly.
 Dissepates heat better increasing lifetime.
- Open flute form reduces drill drawback when drilling deeper holes.
- Sharpened edges reduce binding for faster cleaner cuts.
- Flatter twist angle creates smaller chippings, ideal for drilling harder steels ie. stainless steel.

135° SPLIT POINT


- Precision starting, drill bit won't walk.
- Penetrates quickly.
- Good for drilling on curved surfaces.
- Requires less effort/feed pressure.
- Excellent for very hard materials.





THUNDERWEB - HSS-Ground metal drill bits - DIN338

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------------|--------------------------|------------------|---------------------|----------------|---------------|
| 1.0 | 34 | 12 | 2 | 1 | 4932352345 | 4002395370047 |
| 1.5 | 40 | 18 | 2 | 1 | 4932352346 | 4002395370054 |
| 2.0 | 49 | 24 | 2 | 1 | 4932352347 | 4002395370061 |
| 2.5 | 57 | 30 | 2 | 1 | 4932352348 | 4002395370078 |
| 3.0 | 61 | 33 | 2 | 1 | 4932352349 | 4002395370085 |
| 3.2 | 65 | 36 | 2 | 1 | 4932352350 | 4002395370092 |
| 3.5 | 70 | 39 | 2 | 1 | 4932352351 | 4002395370108 |
| 4.0 | 75 | 43 | 2 | 1 | 4932352352 | 4002395370115 |
| 4.2 | 75 | 43 | 1 | 1 | 4932352353 | 4002395370122 |
| 4.5 | 80 | 47 | 1 | 1 | 4932352354 | 4002395370139 |
| 4.8 | 86 | 52 | 1 | 1 | 4932352355 | 4002395370146 |
| 5.0 | 86 | 52 | 1 | 1 | 4932352356 | 4002395370153 |
| 5.5 | 93 | 57 | 1 | 1 | 4932352357 | 4002395370160 |
| 6.0 | 93 | 57 | 1 | 1 | 4932352358 | 4002395370177 |
| 6.5 | 101 | 63 | 1 | 1 | 4932352359 | 4002395370184 |
| 6.8 | 109 | 69 | 1 | 1 | 4932352360 | 4002395370191 |
| 7.0 | 109 | 69 | 1 | 1 | 4932352361 | 4002395370207 |
| 7.5 | 109 | 69 | 1 | 1 | 4932352362 | 4002395370214 |
| 8.0 | 117 | 75 | 1 | 1 | 4932352363 | 4002395370221 |
| 8.5 | 117 | 75 | 1 | 1 | 4932352364 | 4002395370238 |
| 9.0 | 125 | 81 | 1 | 1 | 4932352365 | 4002395370245 |
| 9.5 | 125 | 81 | 1 | 1 | 4932352366 | 4002395370252 |
| 10.0 | 133 | 87 | 1 | 1 | 4932352367 | 4002395370269 |
| 10.5 | 133 | 87 | 1 | 1 | 4932352368 | 4002395370276 |
| 11.0 | 142 | 94 | 1 | 1 | 4932352369 | 4002395370283 |
| 11.5 | 142 | 94 | 1 | 1 | 4932352370 | 4002395370290 |
| 12.0 | 151 | 101 | 1 | 1 | 4932352371 | 4002395370306 |
| 12.5 | 151 | 101 | 1 | 1 | 4932352372 | 4002395370313 |
| 13.0 | 151 | 101 | 1 | 1 | 4932352373 | 4002395370320 |



THUNDERWEB - DIN 338 - 5 and 10 pack

| Diameter (mm) | Total length (mm) | Working length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|-------------------|------------------------|------------------|---------------------|----------------|---------------|
| 1 | 34 | 12 | 10 | 1 | 4932352377 | 4002395370368 |
| 1.1 | 36 | 14 | 10 | 1 | 4932459826 | 4058546029982 |
| 1.2 | 38 | 16 | 10 | 1 | 4932459827 | 4058546029999 |
| 1.3 | 38 | 16 | 10 | 1 | 4932459828 | 4058546030001 |
| 1.4 | 40 | 18 | 10 | 1 | 4932459829 | 4058546030018 |
| 1.5 | 40 | 18 | 10 | 1 | 4932352378 | 4002395370375 |
| 1.6 | 43 | 20 | 10 | 1 | 4932459830 | 4058546030025 |
| 1.7 | 43 | 20 | 10 | 1 | 4932459831 | 4058546030032 |
| 1.8 | 46 | 22 | 10 | 1 | 4932459832 | 4058546030049 |
| 1.9 | 46 | 22 | 10 | 1 | 4932459833 | 4058546030056 |
| 2 | 49 | 24 | 10 | 1 | 4932352379 | 4002395370382 |
| 2.1 | 49 | 24 | 10 | 1 | 4932459834 | 4058546030063 |
| 2.2 | 53 | 27 | 10 | 1 | 4932459835 | 4058546030070 |
| 2.3 | 53 | 27 | 10 | 1 | 4932459836 | 4058546030087 |
| 2.4 | 57 | 30 | 10 | 1 | 4932430569 | 4002395382309 |
| 2.5 | 57 | 30 | 10 | 1 | 4932352380 | 4002395370399 |
| 2.6 | 57 | 30 | 10 | 1 | 4932459837 | 4058546030094 |
| 2.7 | 61 | 33 | 10 | 1 | 4932459838 | 4058546030100 |
| 2.8 | 61 | 33 | 10 | 1 | 4932459839 | 4058546030117 |
| 2.9 | 61 | 33 | 10 | 1 | 4932459840 | 4058546030124 |
| 3 | 61 | 33 | 10 | 1 | 4932352381 | 4002395370405 |
| 3.1 | 65 | 36 | 10 | 1 | 4932459841 | 4058546030131 |
| 3.2 | 65 | 36 | 10 | 1 | 4932352382 | 4002395370412 |
| 3.3 | 65 | 36 | 10 | 1 | 4932459842 | 4058546030148 |
| 3.4 | 70 | 39 | 10 | 1 | 4932459843 | 4058546030155 |



THUNDERWEB - DIN 338 - 5 and 10 pack

| | | | | | | paok |
|---------------|-------------------|------------------------|------------------|---------------------|----------------|----------------|
| Diameter (mm) | Total length (mm) | Working length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
| 3.5 | 70 | 39 | 10 | 1 | 4932352383 | 4002395370429 |
| 3.6 | 70 | 39 | 10 | 1 | 4932459844 | 4058546030162 |
| 3.7 | 70 | 39 | 10 | 1 | 4932459845 | 4058546030179 |
| 3.8 | 75 | 43 | 10 | 1 | 4932430547 | 4002395382088 |
| 3.9 | 75 | 43 | 10 | 1 | 4932459846 | 4058546030186 |
| 4 | 75 | 43 | 10 | 1 | 4932352384 | 4002395370436 |
| 4.1 | 75 | 43 | 10 | 1 | 4932459847 | 4058546030193 |
| 4.2 | 75 | 43 | 10 | 1 | 4932352385 | 4002395370443 |
| 4.3 | 80 | 47 | 10 | 1 | 4932459848 | 4058546030209 |
| 4.4 | 80 | 47 | 10 | 1 | 4932459849 | 4058546030216 |
| 4.5 | 80 | 47 | 10 | 1 | 4932352386 | 4002395370450 |
| 4.6 | 80 | 47 | 10 | 1 | 4932459850 | 4058546030223 |
| 4.7 | 80 | 47 | 10 | 1 | 4932459851 | 4058546030230 |
| 4.8 | 86 | 52 | 10 | 1 | 4932352387 | 4002395370467 |
| 4.9 | 86 | 52 | 10 | 1 | 4932459852 | 4058546030247 |
| 5 | 86 | 52 | 10 | 1 | 4932352388 | 4002395370474 |
| 5.1 | 86 | 52 | 10 | 1 | 4932459853 | 4058546030254 |
| 5.2 | 86 | 52 | 10 | 1 | 4932430548 | 4002395382095 |
| 5.3 | 86 | 52 | 10 | 1 | 4932459854 | 4058546030261 |
| 5.4 | 93 | 57 | 10 | 1 | 4932459855 | 4058546030278 |
| 5.5 | 93 | 57 | 10 | 1 | 4932352389 | 4002395370481 |
| 5.6 | 93 | 57 | 10 | 1 | 4932430570 | 4002395382316 |
| 5.7 | 93 | 57 | 10 | 1 | 4932459856 | 4058546030285 |
| 5.8 | 93 | 57 | 10 | 1 | 4932430549 | 4002395382101 |
| 5.9 | 93 | 57 | 10 | 1 | 4932459857 | 4058546030292 |
| 6 | 93 | 57 | 10 | 1 | 4932352390 | 4002395370498 |
| 6.1 | 101 | 63 | 10 | 1 | 4932459858 | 4058546030308 |
| 6.2 | 101 | 63 | 10 | 1 | 4932430550 | 4002395382118 |
| 6.3 | 101 | 63 | 10 | 1 | 4932459859 | 4058546030315 |
| 6.4 | 101 | 63 | 10 | 1 | 4932430571 | 4002395382323 |
| 6.5 | 101 | 63 | 10 | 1 | 4932352391 | 4002395370504 |
| 6.6 | 101 | 63 | 5 | 1 | 4932459860 | 4058546030322 |
| 6.7 | 101 | 63 | 5 | 1 | 4932459861 | 4058546030339 |
| 6.8 | 109 | 69 | 5 | 1 | 4932352392 | 4002395370511 |
| 6.9 | 109 | 69 | 5 | 1 | 4932459862 | 4058546030346 |
| 7 | 109 | 69 | 5 | 1 | 4932352393 | 4002395370528 |
| 7.1 | 109 | 69 | 5 | 1 | 4932459863 | 4058546030353 |
| 7.2 | 109 | 69 | 5 | 1 | 4932430551 | 4002395382125 |
| 7.3 | 109 | 69 | 5 | 1 | 4932459864 | 4058546030360 |
| 7.4 | 109 | 69 | 5 | 1 | 4932459865 | 4058546030377 |
| 7.5 | 109 | 69 | 5 | 1 | 4932352394 | 4002395370535 |
| 7.6 | 117 | 75 | 5 | 1 | 4932459866 | 4058546030384 |
| 7.7 | 117 | 75 | 5 | 1 | 4932459867 | 4058546030391 |
| 7.8 | 117 | 75 | 5 | 1 | 4932459868 | 4058546030407 |
| 7.9 | 117 | 75 | 5 | 1 | 4932459869 | 4058546030414 |
| 8 | 117 | 75 | 5 | 1 | 4932352395 | 4002395370542 |
| 8.1 | 117 | 75 | 5 | 1 | 4932459870 | 4058546030421 |
| 8.2 | 117 | 75 | 5 | 1 | 4932430552 | 4002395382132 |
| 8.3 | 117 | 75 | 5 | 1 | 4932459871 | 4058546030438 |
| 8.4 | 117 | 75 | 5 | 1 | 4932430553 | 4002395382149 |
| 8.5 | 117 | 75 | 5 | 1 | 4932352396 | 4002395370559 |
| 8.6 | 125 | 81 | 5 | 1 | 4932459872 | 4058546030445 |
| 8.7 | 125 | 81 | 5 | 1 | 4932459873 | 4058546030452 |
| 8.8 | 125 | 81 | 5 | 1 | 4932459874 | 4058546030469 |
| 8.9 | 125 | 81 | 5 | 1 | 4932459875 | 4058546030476 |
| 9 | 125 | 81 | 5 | 1 | 4932352397 | 4002395370566 |
| 9.1 | 125 | 81 | 5 | 1 | 4932459876 | 4058546030483 |
| 9.2 | 125 | 81 | 5 | 1 | 4932459877 | 4058546030490 |
| 9.3 | 125 | 81 | 5 | 1 | 4932459878 | 4058546030506 |
| 9.4 | 125 | 81 | 5 | 1 | 4932459879 | 4058546030513 |
| 9.5 | 125 | 81 | 5 | 1 | 4932352398 | 4002395370573 |
| 9.6 | 133 | 87 | 5 | 1 | 4932459880 | 4058546030520 |
| 9.7 | 133 | 87 | 5 | 1 | 4932459881 | 4058546030537 |
| 9.8 | 133 | 87 | 5 | 1 | 4932459882 | 4058546030544 |
| 5.0 | 100 | 01 | J | | 1002-100002 | 10000 10000011 |



THUNDERWEB - DIN 338 - 5 and 10 pack

| Diameter (mm) | Total length (mm) | Working length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|----------------------|------------------------|------------------|---------------------|----------------|---------------|
| 9.9 | 133 | 87 | 5 | 1 | 4932459883 | 4058546030551 |
| 10 | 133 | 87 | 5 | 1 | 4932352399 | 4002395370580 |
| 10.5 | 133 | 87 | 5 | 1 | 4932352400 | 4002395370597 |
| 11 | 142 | 94 | 5 | 1 | 4932352401 | 4002395370603 |
| 11.5 | 142 | 94 | 5 | 1 | 4932352402 | 4002395370610 |
| 12 | 151 | 101 | 5 | 1 | 4932352403 | 4002395370627 |
| 12.5 | 151 | 101 | 5 | 1 | 4932352404 | 4002395370634 |
| 13 | 151 | 101 | 5 | 1 | 4932352405 | 4002395370641 |



THUNDERWEB - DIN 338 - cassettes

| Description | Supplied in | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---------------------|------------------|---------------------|----------------|---------------|
| THUNDERWEB HSS-G set (19pc) | | | | | |
| ① 01/1.5/2/2.5/3/3.5/4/4.5/5/5.5/6/6.5/7/7.5/8/8.5/9/9.5/10 mm | Plastic cassette | 19 | 1 | 4932352374 | 4002395370337 |
| Counter display | | | | | |
| ② 6 x 19 pc HSS-G drill bits set (4932352374) | - | 6 | 1 | 4932352375 | 4002395370344 |
| THUNDERWEB HSS-G set (25pc) | | | | | |
| ③ 1/1.5/2/2.5/3/3.5/4/4.5/ 5/5.5/6/6.5/7/7.5/8/8.5/9/ 9.5/10/10.5/11/11.5/12/ 12.5/13 mm | Plastic cassette | 25 | 1 | 4932352376 | 4002395370351 |



HSS-G metal drill bits - long - DIN 340 -5 and 10 pack

High quality high speed steel. Split point DIN 1412 C.

Right hand cutting edge.


135° angle for improved centering.

Most suitable for drilling deep holes in channels or where there are hollow sections.

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------------|--------------------------|------------------|------------------------|----------------|---------------|
| 2.0 | 85 | 56 | 10 | 1 | 4932430328 | 4002395379897 |
| 2.5 | 95 | 62 | 10 | 1 | 4932430329 | 4002395379903 |
| 3.0 | 100 | 66 | 10 | 1 | 4932430330 | 4002395379910 |
| 3.5 | 112 | 73 | 10 | 1 | 4932430331 | 4002395379927 |
| 4.0 | 119 | 78 | 10 | 1 | 4932430332 | 4002395379934 |
| 4.5 | 126 | 82 | 10 | 1 | 4932430333 | 4002395379941 |
| 5.0 | 132 | 87 | 10 | 1 | 4932430334 | 4002395379958 |
| 5.5 | 139 | 91 | 10 | 1 | 4932430335 | 4002395379965 |
| 6.0 | 139 | 91 | 10 | 1 | 4932430336 | 4002395379972 |
| 6.5 | 148 | 97 | 10 | 1 | 4932430337 | 4002395379989 |
| 7.0 | 156 | 102 | 10 | 1 | 4932430338 | 4002395379996 |
| 8.0 | 165 | 109 | 10 | 1 | 4932430339 | 4002395380008 |
| 9.0 | 175 | 115 | 10 | 1 | 4932430340 | 4002395380015 |
| 10.0 | 184 | 121 | 10 | 1 | 4932430341 | 4002395380022 |
| 11.0 | 195 | 128 | 5 | 1 | 4932430342 | 4002395380039 |
| 12.0 | 205 | 134 | 5 | 1 | 4932430343 | 4002395380046 |
| 13.0 | 205 | 134 | 5 | 1 | 4932430344 | 4002395380053 |







HSS-G metal drill bits - short - DIN 1897 - 5 and 10 pack

Drill bit quality: High quality high speed steel. Tip geometry: Split Point DIN 1412 C.

Point angle: 135°. Tolerance: h8. Flute / Helix angle: Type N flute and normal 20 - 30° angle.

Right hand cutting edge. Surface / Colour: Polished silver. Withstands high drill point pressure due to short overall length. Excellent concentricity. Polished type N flute with right hand cutting edge, eliminates binding for faster chip removal and faster cutting with less effort.

Application: Most suited for drilling sheet and thin walled materials.


Suitable for drilling in sheet steel, thin alloyed and non-alloyed material up to 900 N/mm².

Also suitable for wood and plastics.

| | Total length | Working | Pack | Min. order | | |
|---------------|--------------|---------------|----------|------------|----------------|---------------|
| Diameter (mm) | (mm) A | length (mm) B | quantity | quantity | Article Number | EAN Code |
| 2.0 | 38 | 12 | 10 | 1 | 4932352200 | 4002395368532 |
| 2.5 | 43 | 14 | 10 | 1 | 4932352201 | 4002395368549 |
| 3.0 | 46 | 16 | 10 | 1 | 4932352202 | 4002395368556 |
| 3.2 | 49 | 18 | 10 | 1 | 4932352203 | 4002395368563 |
| 3.3 | 49 | 18 | 10 | 1 | 4932352204 | 4002395368570 |
| 3.5 | 52 | 20 | 10 | 1 | 4932352205 | 4002395368587 |
| 3.7 | 52 | 20 | 10 | 1 | 4932352206 | 4002395368594 |
| 4.0 | 55 | 22 | 10 | 1 | 4932352207 | 4002395368600 |
| 4.2 | 55 | 22 | 10 | 1 | 4932352208 | 4002395368617 |
| 4.5 | 58 | 24 | 10 | 1 | 4932352209 | 4002395368624 |
| 4.8 | 62 | 26 | 10 | 1 | 4932352210 | 4002395368631 |
| 5.0 | 62 | 26 | 10 | 1 | 4932352211 | 4002395368648 |
| 5.2 | 62 | 26 | 10 | 1 | 4932352212 | 4002395368655 |
| 5.5 | 66 | 28 | 10 | 1 | 4932352213 | 4002395368662 |
| 6.0 | 66 | 28 | 10 | 1 | 4932352214 | 4002395368679 |
| 6.5 | 70 | 31 | 10 | 1 | 4932352215 | 4002395368686 |
| 7.0 | 74 | 34 | 10 | 1 | 4932352216 | 4002395368693 |
| 7.5 | 74 | 34 | 5 | 1 | 4932352217 | 4002395368709 |
| 8.0 | 79 | 37 | 5 | 1 | 4932352218 | 4002395368716 |
| 8.5 | 79 | 37 | 5 | 1 | 4932352219 | 4002395368723 |
| 9.0 | 84 | 40 | 5 | 1 | 4932352220 | 4002395368730 |
| 10.0 | 89 | 43 | 5 | 1 | 4932352221 | 4002395368747 |







HSS-G metal drill bits - double ended

Drill bit quality: High quality high speed steel. Tip geometry: Split Point DIN 1412 C. Point angle: 135° Tolerance: h8. Flute / Helix angle: Type N flute and normal 20 - 30° angle.

Right hand cutting edge. Surface / Colour: Polished silver.

Split point tip for good centering. Both ends can be used. Due to its short length it can be used with higher feed pressure without the risk of breakage.

Excellent concentricity. Polished type N flute with right hand cutting edge, eliminates binding for faster chip removal and faster cutting with less effort.


Application: Suitable drilling in steel, non-ferrous metals and plastic.

Most suitable for thin sheet materials, e.g. rivet holes.

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------------|--------------------------|------------------|---------------------|----------------|---------------|
| 2.5 | 43 | 10 | 10 | 1 | 4932352222 | 4002395368754 |
| 3.0 | 46 | 11 | 10 | 1 | 4932352223 | 4002395368761 |
| 3.2 | 49 | 12 | 10 | 1 | 4932352224 | 4002395368778 |
| 3.3 | 49 | 12 | 10 | 1 | 4932352225 | 4002395368785 |
| 3.5 | 52 | 14 | 10 | 1 | 4932352226 | 4002395368792 |
| 4.0 | 55 | 14 | 10 | 1 | 4932352227 | 4002395368808 |
| 4.1 | 55 | 14 | 10 | 1 | 4932352228 | 4002395368815 |
| 4.2 | 55 | 14 | 10 | 1 | 4932352229 | 4002395368822 |
| 4.5 | 58 | 16 | 10 | 1 | 4932352230 | 4002395368839 |
| 4.8 | 62 | 18 | 10 | 1 | 4932352231 | 4002395368846 |
| 5.0 | 62 | 18 | 10 | 1 | 4932352232 | 4002395368853 |
| 5.5 | 66 | 19 | 10 | 1 | 4932352233 | 4002395368860 |
| 6.0 | 66 | 19 | 10 | 1 | 4932352234 | 4002395368877 |









RED HEX - SHOCKWAVE™ HSS-Ground titanium metal drill bits

Impact rated drill bit with $^{1}/_{4}^{\prime\prime}$ hex shank optimised for impact drivers.

The 135° tip angle reduces tip walking and allows a precise start.


The flute design allows for a faster material ejection and decreases heat build up for more efficiency.

The titanium coating dispenses heat.

Higher versatility thanks to the 1/4" hex shank which makes this drill bit suitable for impact and drill drivers.



| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------------|--------------------------|---------------|---------------------|----------------|--------------|
| 2 | 59.5 | 17 | 2 | 1 | 48894703 | 045242501557 |
| 2.5 | 62 | 19 | 2 | 1 | 48894704 | 045242501564 |
| 3 | 65 | 23 | 2 | 1 | 48894763 | 045242506866 |
| 3.2 | 66.5 | 23 | 2 | 1 | 48894706 | 045242501571 |
| 3.5 | 69 | 25 | 2 | 1 | 48894707 | 045242501588 |
| 4 | 71.5 | 26 | 2 | 1 | 48894708 | 045242501595 |
| 4.2 | 74 | 28 | 1 | 1 | 48894709 | 045242501601 |
| 4.5 | 76 | 29 | 1 | 1 | 48894710 | 045242501618 |
| 4.8 | 78 | 29 | 1 | 1 | 48894711 | 045242501625 |
| 5 | 93 | 46 | 1 | 1 | 48894712 | 045242501632 |
| 5.5 | 104 | 59 | 1 | 1 | 48894764 | 045242506873 |
| 6 | 105 | 60 | 1 | 1 | 48894714 | 045242501649 |
| 6.5 | 107 | 63 | 1 | 1 | 48894715 | 045242501656 |
| 6.8 | 108 | 64 | 1 | 1 | 48894716 | 045242501663 |
| 7 | 109 | 65 | 1 | 1 | 48894717 | 045242501670 |
| 7.5 | 110 | 66 | 1 | 1 | 48894718 | 045242501687 |
| 8 | 111 | 67 | 1 | 1 | 48894719 | 045242501694 |
| 8.5 | 114 | 70 | 1 | 1 | 48894720 | 045242501700 |
| 9 | 117 | 73 | 1 | 1 | 48894721 | 045242501717 |
| 9.5 | 118 | 74 | 1 | 1 | 48894722 | 045242501724 |
| 10 | 120 | 76 | 1 | 1 | 48894723 | 045242501731 |
| 10.5 | 122 | 78 | 1 | 1 | 48894724 | 045242501748 |
| 11 | 125 | 81 | 1 | 1 | 48894725 | 045242501755 |
| 11.5 | 126 | 82 | 1 | 1 | 48894726 | 045242501762 |
| 12 | 127 | 83 | 1 | 1 | 48894727 | 045242501779 |
| 12.5 | 128 | 83 | 1 | 1 | 48894728 | 045242501786 |
| 13 | 130 | 85 | 1 | 1 | 48894729 | 045242501793 |
| SHOCKWAVE™ HS (10pc) 1 Plastic cassette co 7 / 8 / 9 / 10 mm | | | 10 | 1 | 48894759 | 045242502066 |
| SHOCKWAVE™ HS (19pc) ② Plastic cassette co 2 x 4 / 4.5 / 5.5 / 6 9.5 / 10 mm | ntains: Ø 2 / 2.5 | 5/2x3/3.5/ | 19 | 1 | 48894760 | 045242502073 |







135° SPLIT POINT ™



FOR IMPACTS & DRILLS





RED COBALT - HSS-Ground - DIN 338 Metal drill bits

Metal drill bits ground from solid extremely heat resistant cobalt-alloyed high speed steel produced according to DIN 338.

Split point shaped cutting tip with 135° angle for improved centering - no center punch required. 5% Cobalt content. Withstands high drilling heat.

Type N flute normal angle.

Suitable for drilling high alloy content steels and metals with tensile strengths over 1000 N/mm^2 like heat and acid proof steels and stainless steel.

3-flat shank from 5 mm diameter for better grip and prevents chuck slippage.


Colour: bronze.

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------------|--------------------------|------------------|---------------------|----------------|---------------|
| 1.0 | 34 | 12 | 2 | 1 | 4932363248 | 4002395333080 |
| 1.5 | 40 | 18 | 2 | 1 | 4932363249 | 4002395333097 |
| 2.0 | 49 | 24 | 2 | 1 | 4932363250 | 4002395333103 |
| 2.5 | 57 | 30 | 2 | 1 | 4932363251 | 4002395333110 |
| 3.0 | 61 | 33 | 2 | 1 | 4932363253 | 4002395333134 |
| 3.2 | 65 | 36 | 2 | 1 | 4932363254 | 4002395333141 |
| 3.5 | 70 | 39 | 2 | 1 | 4932363256 | 4002395333165 |
| 4.0 | 75 | 43 | 2 | 1 | 4932363258 | 4002395333189 |
| 4.2 | 75 | 43 | 1 | 1 | 4932363260 | 4002395333202 |
| 4.5 | 80 | 47 | 1 | 1 | 4932363262 | 4002395333226 |
| 4.8 | 86 | 52 | 1 | 1 | 4932363263 | 4002395333233 |
| 5.0 | 86 | 52 | 1 | 1 | 4932363264 | 4002395333240 |
| 5.5 | 93 | 57 | 1 | 1 | 4932363267 | 4002395333271 |
| 6.0 | 93 | 57 | 1 | 1 | 4932363268 | 4002395333288 |
| 6.5 | 101 | 63 | 1 | 1 | 4932363269 | 4002395333295 |
| 6.8 | 109 | 69 | 1 | 1 | 4932363270 | 4002395333301 |
| 7.0 | 109 | 69 | 1 | 1 | 4932363271 | 4002395333318 |
| 7.5 | 109 | 69 | 1 | 1 | 4932363272 | 4002395333325 |
| 8.0 | 117 | 75 | 1 | 1 | 4932363274 | 4002395333349 |
| 8.5 | 117 | 75 | 1 | 1 | 4932363276 | 4002395333363 |
| 9.0 | 125 | 81 | 1 | 1 | 4932363277 | 4002395333370 |
| 9.5 | 125 | 81 | 1 | 1 | 4932363278 | 4002395333387 |
| 10.0 | 133 | 87 | 1 | 1 | 4932363279 | 4002395333394 |
| 10.5 | 133 | 87 | 1 | 1 | 4932363281 | 4002395333417 |
| 11.0 | 142 | 94 | 1 | 1 | 4932363282 | 4002395333424 |
| 11.5 | 142 | 94 | 1 | 1 | 4932363283 | 4002395333431 |
| 12.0 | 151 | 101 | 1 | 1 | 4932363284 | 4002395333448 |
| 12.5 | 151 | 101 | 1 | 1 | 4932363285 | 4002395333455 |
| 13.0 | 151 | 101 | 1 | 1 | 4932363286 | 4002395333462 |









RED COBALT - HSS-Ground - DIN 338 Metal drill bits - cassettes

| | Description | Supplied in | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|--|---------------------|------------------|---------------------|----------------|---------------|
| 1 | RED COBALT HSS-Ground set (19pc) Ø 1/1.5/2/2.5/3/3.5/4/4.5/ 5/5.5/6/6.5/7/7.5/8/8.5/9/ 9.5/10 mm | Plastic cassette | 19 | 1 | 4932352470 | 4002395371297 |
| 2 | RED COBALT HSS-Ground set (25pc) 0 1/1.5/2/2.5/3/3.5/4/4.5/5/5.5/6/6.5/7/7.5/8/8.5/9/9.5/10/10.5/11/11.5/12/12.5/ 13 mm | Plastic cassette | 25 | 1 | 4932352471 | 4002395371303 |





RED COBALT - HSS-Ground - DIN 338 Metal drill bits - 5 and 10 pack

Metal drill bits ground from solid extremely heat resistant cobalt-alloyed high speed steel produced according to DIN 338.

Polished finish. Split point shaped cutting tip with 135° angle for improved centering - no center punch required.

5% Cobalt content withstands high drilling heat.

Type N flute normal angle.

Suitable for drilling high alloy content steels and metals with tensile strengths over 1000 N/mm² like heat and acid proof steels and stainless steel.

3-flat shank from 5 mm diameter for better grip and prevents chuck slippage.


Colour: bronze.

| Diameter (mm) | Total length (mm) A | Working length (mm) B | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------------|--------------------------|------------------|---------------------|----------------|---------------|
| 1.0 | 34 | 12 | 10 | 1 | 4932373332 | 4002395349173 |
| 1.5 | 40 | 18 | 10 | 1 | 4932373333 | 4002395349180 |
| 2.0 | 49 | 24 | 10 | 1 | 4932373334 | 4002395349197 |
| 2.5 | 57 | 30 | 10 | 1 | 4932373335 | 4002395349807 |
| 3.0 | 61 | 33 | 10 | 1 | 4932373336 | 4002395349814 |
| 3.2 | 65 | 36 | 10 | 1 | 4932373337 | 4002395349821 |
| 3.5 | 70 | 39 | 10 | 1 | 4932373338 | 4002395349838 |
| 4.0 | 75 | 43 | 10 | 1 | 4932373339 | 4002395349845 |
| 4.2 | 75 | 43 | 10 | 1 | 4932373340 | 4002395349852 |
| 4.5 | 80 | 47 | 10 | 1 | 4932373341 | 4002395349869 |
| 4.8 | 86 | 52 | 10 | 1 | 4932373342 | 4002395349876 |
| 5.0 | 86 | 52 | 10 | 1 | 4932373343 | 4002395349883 |
| 5.5 | 93 | 57 | 10 | 1 | 4932373344 | 4002395349890 |
| 6.0 | 93 | 57 | 10 | 1 | 4932373345 | 4002395347100 |
| 6.5 | 101 | 63 | 10 | 1 | 4932373346 | 4002395347117 |
| 6.8 | 109 | 69 | 5 | 1 | 4932373347 | 4002395347124 |
| 7.0 | 109 | 69 | 5 | 1 | 4932373348 | 4002395347131 |
| 7.5 | 109 | 69 | 5 | 1 | 4932373349 | 4002395347148 |
| 8.0 | 117 | 75 | 5 | 1 | 4932373350 | 4002395347155 |
| 8.5 | 117 | 75 | 5 | 1 | 4932373351 | 4002395347162 |
| 9.0 | 125 | 81 | 5 | 1 | 4932373352 | 4002395347179 |
| 9.5 | 125 | 81 | 5 | 1 | 4932373353 | 4002395347186 |
| 10.0 | 133 | 87 | 5 | 1 | 4932373354 | 4002395347193 |
| 10.5 | 133 | 87 | 5 | 1 | 4932373355 | 4002395347803 |
| 11.0 | 142 | 94 | 5 | 1 | 4932373356 | 4002395347810 |
| 11.5 | 142 | 94 | 5 | 1 | 4932373357 | 4002395347827 |
| 12.0 | 151 | 101 | 5 | 1 | 4932373358 | 4002395347834 |
| 12.5 | 151 | 101 | 5 | 1 | 4932373359 | 4002395347841 |
| 13.0 | 151 | 101 | 5 | 1 | 4932373360 | 4002395347858 |









Step drills

- Step Drill advantages over conventional drill bits:
 - One drill bit to drill multiple sizes
 - Do more carry less!
 - Best option for enlarging existing holes.
 - More durable than twist drill bits, thick core resists breakage.
 - More accurate and less walking, tip starts on contact.
 - Clean burr free holes, less reaming required.
 - Drills plastic without splitting or cracking.
- Step drills are ideal for drilling into the following materials:
 - Ferrous & non-ferrous sheets metals, profiles and pipes.
 - Copper, brass and aluminium.
 - Stainless steel.
 - Plastics.
 - Maximum material thickness 4 mm.
 - To ensure best lifetime we recommend the use of a coolant.

■ Trades:

- Electrical: drilling of panels and cabinets for cable gland installation.
- Plumbing / HVAC: access holes for pipework and installation.
- Metal workers / fabrication: various sizes and hole enlargement.
- Automotive: holes for cable installation (mobile telephones, antennas, re-directing electrical wiring).
- Maintenance repair operations: various applications, sizes and hole enlargement.





MILWAUKEE® Advantages

Spot drill - Drill - Deburr - All in one go

- 1 Rapid Strike tip for improved centering less walking and fast drilling without the need to punch or pre drill the material.
- ② Special tip and step geometry for jam-free performance less risk of drill snagging when used with high speed cordless tools and also prevents deformation of the drilled material.
- 3 Optimised 2 flute ground sharpened edge geometry for 2 x faster and smoother cutting.
- 4 Produced from custom engineered steel with black oxide coating for 4 x longer life. Optimised for use with high speed cordless drills.
- (5) Laser engraved size markings for best long term visibility.
- 6 Each step is relief ground to drill and deburr automatically.
- With 3 flat secure grip to prevent step drill from slipping in the chuck and ensure maximum transmission of torque.



Step drills

| | Description | Shank diameter (mm) | Overall length (mm) | No. of steps | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|---------------------|---------------------|---------------------|--------------|------------------|---------------------|----------------|--------------|--|
| 1 | PG7 - PG21 | 10 | 68 | 9 | 1 | 1 | 48899321 | 045242364060 | |
| 2 | M6 - M32 | 10 | 92 | 13 | 1 | 1 | 48899332 | 045242344437 | |
| 3 | 4 - 12 mm / 1 | 6 | 65 | 9 | 1 | 1 | 48899301 | 045242342532 | |
| 4 | 4 - 12 mm / 2 | 6 | 65 | 5 | 1 | 1 | 48899302 | 045242342549 | |
| 5) | 4 - 20 mm | 8 | 65 | 9 | 1 | 1 | 48899320 | 045242344406 | |
| 6 | 6 - 35 mm | 10 | 90 | 14 | 1 | 1 | 48899335 | 045242344413 | |
| 7) | 6 - 40.5 mm | 10 | 90 | 17 | 1 | 1 | 48899340 | 045242547777 | |
| Step drill set (3pc) 8 Includes 3 step drill bits: 4 - 12 mm/1, 4 - 20 mm, 6 - 35 mm | | | | | | | | | |
| Ste | n & drill hit combo | set (10nc) | | | | | | | |

48899350

045242538836





6















 $[\]begin{tabular}{ll} \hline \end{tabular} \begin{tabular}{ll} \hline \end{tabular} \begin{ta$





SHOCKWAVE™ IMPACT DUTY step drills

SHOCKWAVE™ Impact Duty step drills are designed to deliver best-in-class performance in impact drivers and also the versatility to be used in drill drivers.

The 1/4" Hex shank with an optimised SHOCKZONE™ ensures maximum durability by preventing early shank breaks.


New Titanium Aluminium Nitride coating helps to reduce heat generation for 5x more life.


RAPID STRIKE TIP™: Accurate start without walking and fast drilling without the need to pre-drill the material.


Dual spiral flute design: Optimised for impact driver speed and for smooth, jam-free drilling. Laser engraved markings: Do not wear away with time.




| Description | Shank diameter (mm) | Overall length (mm) | No. of steps | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---------------------------|----------------------------|----------------------|--------------|---------------|---------------------|----------------|--------------|--|
| ① 4 - 12 mm / 1" | 1/4" Hex | 81 | 9 | 1 | 1 | 48899261 | 045242505166 | |
| ② 4 - 12 mm / 2" | 1/4" Hex | 81 | 5 | 1 | 1 | 48899262 | 045242505173 | |
| ③ 4 - 20 mm | 1/4" Hex | 81 | 9 | 1 | 1 | 48899263 | 045242505180 | |
| 4 - 30 mm | 1/4" Hex | 101 | 12 | 1 | 1 | 48899265 | 045242505203 | |
| SHOCKWAVE™ Impact Du | uty step drill set (3pc) | | | 0 | | 40000000 | 045040505010 | |
| (5) Includes 3 SH0CKWAVE™ | step drill bits: 4 - 12 mm | /1, 4 - 20 mm, 4 - 3 | 0 mm | 3 | ı | 48899266 | 045242505210 | |











Magnetic Drilling



100% Faster

Speed and time savings are achieved due to the following factors. Firstly the annular cutter principle of only cutting material from the periphery of the hole as opposed to the twist drill which must cut the complete diameter of the hole. Secondly the benefit of two aggressive sharp angles per cutting edge help to achieve faster feed rates and lower cutting resistance.

30% More productivity

Because the annular cutter is only cutting material from the periphery of the hole.


Less motor energy and driving power is required.

The larger the drill diameter the greater the energy saving.

Longer lifetime


The annular cutters cutting edges do less work than the twist drill resulting in more holes between sharpening. Thick 6 mm body together with special tooth geometry ensures high stability and reduces to a minimum the risik of breakage due to overloading.

Speed chart

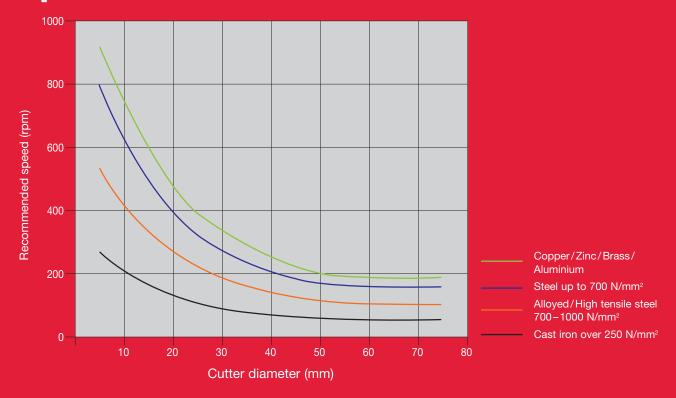

HSS annular cutters 30 mm

Thick walled HSS annular cutters for increased durability and life time. With standard 19 mm Weldon reception.






50 mm

| n |
|---|
| |

| iameter (mm) | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code | Diameter (mm) | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------|---------------------------|------------------|---------------------|----------------|---------------|---------------|---------------------------|------------------|---------------------|----------------|---------------|
| 12 | 30 | 1 | 1 | 4932371740 | 4002395344161 | 14 | 50 | 1 | 1 | 4932343289 | 4002395315352 |
| 13 | 30 | 1 | 1 | 4932371741 | 4002395344178 | 15 | 50 | 1 | 1 | 4932343290 | 4002395315369 |
| 14 | 30 | 1 | 1 | 4932343270 | 4002395315130 | 16 | 50 | 1 | 1 | 4932343291 | 4002395315376 |
| 15 | 30 | 1 | 1 | 4932343271 | 4002395315147 | 17 | 50 | 1 | 1 | 4932343292 | 4002395315383 |
| 16 | 30 | 1 | 1 | 4932343272 | 4002395315154 | 18 | 50 | 1 | 1 | 4932343293 | 4002395315390 |
| 17 | 30 | 1 | 1 | 4932343273 | 4002395315161 | 19 | 50 | 1 | 1 | 4932343294 | 4002395315406 |
| 18 | 30 | 1 | 1 | 4932343274 | 4002395315178 | 20 | 50 | 1 | 1 | 4932343295 | 4002395315413 |
| 19 | 30 | 1 | 1 | 4932343275 | 4002395315185 | 21 | 50 | 1 | 1 | 4932343296 | 4002395315420 |
| 20 | 30 | 1 | 1 | 4932343276 | 4002395315192 | 22 | 50 | 1 | 1 | 4932343297 | 4002395315437 |
| 21 | 30 | 1 | 1 | 4932343277 | 4002395315208 | 23 | 50 | 1 | 1 | 4932343298 | 4002395315444 |
| 22 | 30 | 1 | 1 | 4932343278 | 4002395315215 | 24 | 50 | 1 | 1 | 4932343299 | 4002395315451 |
| 23 | 30 | 1 | 1 | 4932343279 | 4002395315222 | 25 | 50 | 1 | 1 | 4932343300 | 4002395315468 |
| 24 | 30 | 1 | 1 | 4932343280 | 4002395315239 | 26 | 50 | 1 | 1 | 4932343301 | 4002395315475 |
| 25 | 30 | 1 | 1 | 4932343281 | 4002395315246 | 27 | 50 | 1 | 1 | 4932343302 | 4002395315482 |
| 26 | 30 | 1 | 1 | 4932343282 | 4002395315253 | 28 | 50 | 1 | 1 | 4932343303 | 4002395315499 |
| 27 | 30 | 1 | 1 | 4932343283 | 4002395315260 | 29 | 50 | 1 | 1 | 4932343304 | 4002395315505 |
| 28 | 30 | 1 | 1 | 4932343284 | 4002395315277 | 30 | 50 | 1 | 1 | 4932343305 | 4002395315512 |
| 29 | 30 | 1 | 1 | 4932343285 | 4002395315284 | 31 | 50 | 1 | 1 | 4932343306 | 4002395315529 |
| 30 | 30 | 1 | 1 | 4932343286 | 4002395315291 | 32 | 50 | 1 | 1 | 4932343307 | 4002395315536 |
| 31 | 30 | 1 | 1 | 4932343287 | 4002395315307 | 33 | 50 | 1 | 1 | 4932371760 | 4002395344369 |
| 32 | 30 | 1 | 1 | 4932343288 | 4002395315314 | 34 | 50 | 1 | 1 | 4932371761 | 4002395344376 |
| 33 | 30 | 1 | 1 | 4932371742 | 4002395344185 | 35 | 50 | 1 | 1 | 4932371762 | 4002395344383 |
| 34 | 30 | 1 | 1 | 4932371743 | 4002395344192 | 36 | 50 | 1 | 1 | 4932371763 | 4002395344390 |
| 35 | 30 | 1 | 1 | 4932371744 | 4002395344208 | 37 | 50 | 1 | 1 | 4932371764 | 4002395344406 |
| 36 | 30 | 1 | 1 | 4932371745 | 4002395344215 | 38 | 50 | 1 | 1 | 4932371765 | 4002395344413 |
| 37 | 30 | 1 | 1 | 4932371746 | 4002395344222 | 39 | 50 | 1 | 1 | 4932371766 | 4002395344420 |
| 38 | 30 | 1 | 1 | 4932371747 | 4002395344239 | 40 | 50 | 1 | 1 | 4932371767 | 4002395344437 |
| 39 | 30 | 1 | 1 | 4932371748 | 4002395344246 | 41 | 50 | 1 | 1 | 4932371768 | 4002395344444 |
| 40 | 30 | 1 | 1 | 4932371749 | 4002395344253 | 42 | 50 | 1 | 1 | 4932371769 | 4002395344451 |
| 41 | 30 | 1 | 1 | 4932371750 | 4002395344260 | 43 | 50 | 1 | 1 | 4932371770 | 4002395344468 |
| 42 | 30 | 1 | 1 | 4932371751 | 4002395344277 | 44 | 50 | 1 | 1 | 4932371771 | 4002395344475 |
| 43 | 30 | 1 | 1 | 4932371752 | 4002395344284 | 45 | 50 | 1 | 1 | 4932371772 | 4002395344482 |
| 44 | 30 | 1 | 1 | 4932371753 | 4002395344291 | 46 | 50 | 1 | 1 | 4932371773 | 4002395344499 |
| 45 | 30 | 1 | 1 | 4932371754 | 4002395344307 | 47 | 50 | 1 | 1 | 4932371774 | 4002395344505 |
| 46 | 30 | 1 | 1 | 4932371755 | 4002395344314 | 48 | 50 | 1 | 1 | 4932371775 | 4002395344512 |
| 47 | 30 | 1 | 1 | 4932371756 | 4002395344321 | 49 | 50 | 1 | 1 | 4932371776 | 4002395344529 |
| 48 | 30 | 1 | 1 | 4932371757 | 4002395344338 | 50 | 50 | 1 | 1 | 4932371777 | 4002395344536 |
| 49 | 30 | 1 | 1 | 4932371758 | 4002395344345 | | | • | • | | |
| 50 | 30 | 1 | 1 | 4932371759 | 4002395344352 | | | | | | |
| JU | 30 | 1 | 1 | 49323/1/09 | 400233344332 | | | | | | |

| Description | Supplied in | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|--------------|------------------|---------------------|----------------|---------------|
| Telescopic ejector pin for 30 mm cutters | | 2 | 1 | 49590011 | 045242364039 |
| Telescopic ejector pin for 50 mm cutters | | 2 | 1 | 49590012 | 045242364046 |
| HSS annular cutter set (6pc) 1 6 x HSS annular cutters: Ø 14 / 16 / 18 / 20 / 22 / 24 mm - 19 mm Weldon reception. 1 x ejector pin short series - 30 mm | Plastic case | 6 | 1 | 4932372533 | 4002395345236 |

System accessories - Magnetic drill stands

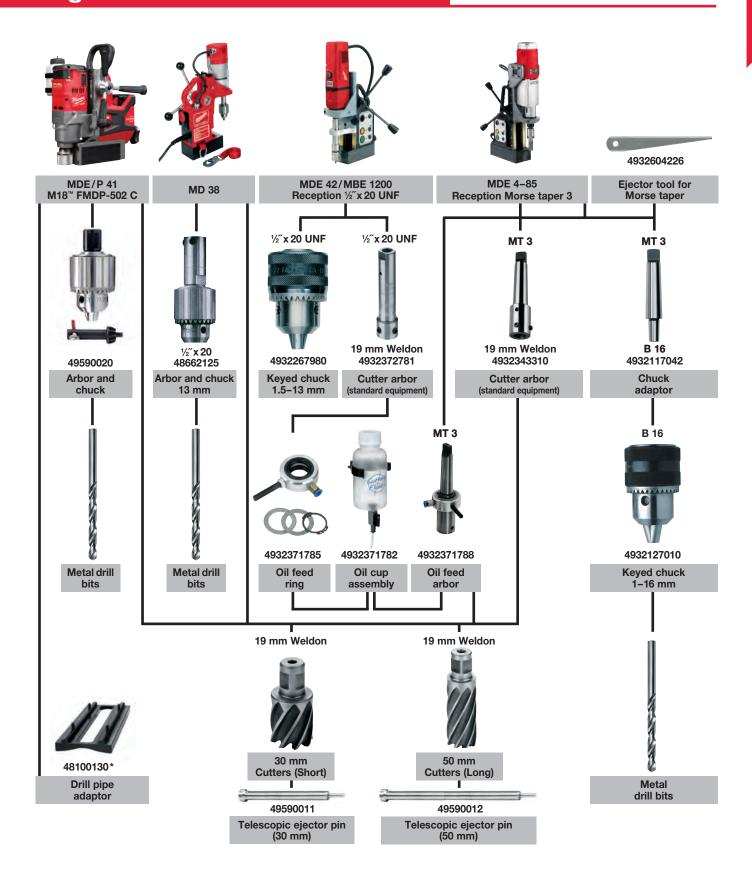



High Performance Holesaws

HOLE DOZER TM

The MILWAUKEE® HOLE DOZER™ is the jobsite workhorse that provides unstoppable durability through the most demanding applications.



Ø 14-152 mm



■ Rip guard tooth geometry provides for the most durable tooth form and best lifetime



Ø 160-210 mm



- Multiple leverage points to work cut material out of the holesaw for faster plug removal
 - Deepest access for thick plugs
 - Higher access for thin material
- Minimises downtime between cuts
- New coating allows less friction and increases drilling speed



milwaukeetool.eu

Tooth design



Carbide:

4 tpi aggressive tooth geometry.

Bi-metal:

■ A variable 4-6 tpi tooth design with a positive 10° tooth angle.

Benefits:

- Faster and more aggressive cut.
- Improved heat dispersion during cutting ensures that the teeth stay sharper for longer.
- Deeper curved gullets provide more efficient chip clearance preventing clogging and heat build up.
- Special shaped tooth angle has less tendency to snag on thinner materials.
- Teeth are altenate/side set to minimise binding and friction.
- Requires less feed pressure This is achieved by the combination of aggressive tooth geometry and good chip clearance resulting in the requirement of less force during drilling.

Holesaw body

- 1.27 mm thick steel holesaw body is rigid to retain its shape but also has built in elasticity.
- Effective sawing depth is 41 mm.

Applications

- High quality manufacturing techniques ensure high rotational precision, therefore these holesaws are suitable for use both in hand and pillar drills (manual feed only).
- This high quality holesaw range is the perfect solution for cutting all types of materials:
 - Steel up to 1000 N/mm² strength
 - Stainless steel and acid resistant steel
 - Non-ferrous metals
 - Cast iron
 - Aluminium
 - Wood
 - Medium density fibreboard (MDF)
 - Gypsum plasterboard
 - Sandwich materials
 - PVC

Tooth material

Carbide:

Carbide teeth provide 10x more life vs. standard bi-metal holesaws.

Bi-Metal:

- Type Matrix II premium high speed steel is used for the toothed area of the holesaw. Matrix II steel contains 8 % cobalt allowing the teeth to retain the original tooth hardness even at high working temperatures when used in metal cutting applications.
- Bi-Metal construction High speed steel teeth are laser welded onto a low alloy steel body. The teeth are then vacuum hardened to 65 HRC at a temperature of 600°C to give maximum durability and lifetime.
- Due to the high wear resistance of the Matrix II steel, these holesaws are ideal for cutting difficult and hard materials such as stainless steel and acid resistant steels as well as softer materials like wood.

Back plate design

- The back plates are constructed with thick steel thus the holes will not enlarge over time. Thick backs add strength and rigidity minimising vibrations.
- 4 drive pin holes for easier arbor location.
- Perfectly manufactured round back plate, especially important for the larger diameter holesaws.



FIXTEC arbors

1 For holesaws Ø 14-30 mm

FIXTEC "twist release" quick change arbor. Prevents holesaw locking onto the arbor. Compatible to all manufacturers holesaws – no adapter required.

2 For holesaws Ø 32-210 mm

The locking nut secures and locks the arbor drive plate against the back of the holesaw for a stable fit, eliminating holesaw wobble and vibration.





HOLE DOZER™ carbide holesaws

Up to 10x more life, high heat and wear resistance compared to Bi-Metal holesaws.

 $4\,\mathrm{Tpi}$ aggressive tooth geometry with large gullets for improved material removal.

Offset teeth for less resistance.

PLUG JACK™ slot geometry provides deep access to remove thick plugs and high leverage for thin materials.

Application areas: plumbing (ceramic tiles - soft, cast iron), metalworking (stainless steel, high allow steels, aluminium) and composites (plastics, sandwich material, computer flooring, fibreglass, plastic coated wood boards, nail embedded wood)

| Diameter (mm) | Ø (inch) | Max. cutting depth (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|----------|----------------------------|------------------|---------------------|----------------|--------------|
| 19 | 3/4 | 41 | 1 | 1 | 49560702 | 045242503971 |
| 22 | 7/8 | 41 | 1 | 1 | 49560704 | 045242503995 |
| 25 | 1 | 41 | 1 | 1 | 49560707 | 045242504008 |
| 29 | 1 1/8 | 41 | 1 | 1 | 49560708 | 045242504015 |
| 32 | 1 1/4 | 41 | 1 | 1 | 49560710 | 045242504022 |
| 35 | 1 3/8 | 41 | 1 | 1 | 49560712 | 045242504039 |
| 38 | 1 1/2 | 41 | 1 | 1 | 49560713 | 045242504053 |
| 44 | 1 3/4 | 41 | 1 | 1 | 49560717 | 045242504107 |
| 48 | 1 7/8 | 41 | 1 | 1 | 49560719 | 045242504114 |
| 51 | 2 | 41 | 1 | 1 | 49560720 | 045242504145 |
| 54 | 2 1/8 | 41 | 1 | 1 | 49560722 | 045242504152 |
| 57 | 2 1/4 | 41 | 1 | 1 | 49560724 | 045242504169 |
| 60 | 2 3/8 | 41 | 1 | 1 | 49560726 | 045242504176 |
| 64 | 2 1/2 | 41 | 1 | 1 | 49560727 | 045242504183 |
| 67 | 2 5/8 | 41 | 1 | 1 | 49560729 | 045242504190 |
| 70 | 2 3/4 | 41 | 1 | 1 | 49560731 | 045242504206 |
| 76 | 3 | 41 | 1 | 1 | 49560734 | 045242504220 |
| 89 | 3 1/2 | 41 | 1 | 1 | 49560738 | 045242504244 |
| 92 | 3 5/8 | 41 | 1 | 1 | 49560739 | 045242504251 |
| 102 | 4 | 41 | 1 | 1 | 49560742 | 045242504275 |
| 108 | 4 1/4 | 41 | 1 | 1 | 49560744 | 045242504282 |
| 114 | 4 1/2 | 41 | 1 | 1 | 49560746 | 045242504299 |
| 127 | 5 | 41 | 1 | 1 | 49560748 | 045242504305 |
| 152 | 6 | 41 | 1 | 1 | 49560749 | 045242504312 |









HOLE DOZER™ bi-metal holesaws

| Diameter (mm) | Ø (inch) | Max. cutting depth (mm) | Pack quantity | Min. order | Article Number | EAN Code |
|------------------|---------------------------------------|----------------------------|------------------|------------|----------------|---------------|
| 14 | 9/16 | 41 | 1 | 1 | 49560002 | 045242271061 |
| 16 | 5/8 | 41 | 1 | 1 | 49560012 | 045242192922 |
| 17 | 11/16 | 41 | 1 | 1 | 49560014 | 045242193639 |
| 19 | 3/4 | 41 | 1 | 1 | 49560023 | 045242192632 |
| 20 | 25/32 | 41 | 1 | 1 | 49560024 | 045242271016 |
| 21 | 13/16 | 41 | 1 | 1 | 49560027 | 045242192649 |
| 22 | 7/8 | 41 | 1 | 1 | 49560032 | 045242192878 |
| 24 | 15/16 | 41 | 1 | 1 | 49560037 | 045242192885 |
| 25 | 1 | 41 | 1 | 1 | 49560043 | 045242192526 |
| 27 | 1 ¹ / ₁₆ | 41 | 1 | 1 | 49560047 | 045242192892 |
| 29 | 1 ¹/s | 41 | 1 | 1 | 49560052 | 045242192939 |
| 30 | 1 3/16 | 41 | 1 | 1 | 49560057 | 045242192946 |
| 32 | 1 1/4 | 41 | 1 | 1 | 49560062 | 045242192977 |
| 33 | 1 5/16 | 41 | 1 | 1 | 49560067 | 045242192984 |
| 35 | 1 ³ / ₈ | 41 | 1 | 1 | 49560072 | 045242192991 |
| 37 | 1 7/16 | 41 | 1 | 1 | 49560077 | 045242193028 |
| 38 | 1 1/2 | 41 | 1 | 1 | 49560082 | 045242193035 |
| 40 | 1 9/16 | 41 | 1 | 1 | 49560087 | 045242193042 |
| 41 | 1 ⁵ / ₈ | 41 | 1 | 1 | 49560092 | 045242193073 |
| 43 | 1 11/16 | 41 | 1 | 1 | 49560097 | 045242193080 |
| 44 | 1 3/4 | 41 | 1 | 1 | 49560102 | 045242193097 |
| 46 | 1 13/16 | 41 | 1 | 1 | 49560107 | 045242193127 |
| 48 | 1 7/8 | 41 | 1 | 1 | 49560112 | 045242193134 |
| 50 | 1 31/52 | 41 | 1 | 1 | 49560113 | 045242271023 |
| 51 | 2 | 41 | 1 | 1 | 49560117 | 045242193141 |
| 52 | 2 1/16 | 41 | 1 | 1 | 49560122 | 045242193172 |
| 54 | 2 1/8 | 41 | 1 | 1 | 49560127 | 045242193189 |
| 56 | 4/6 | 41 | 1 | 1 | 49560129 | 045242504664 |
| 57 | 2 1/4 | 41 | 1 | 1 | 49560132 | 045242193196 |
| 59 | 2 5/16 | 41 | 1 | 1 | 49560137 | 045242193226 |
| 60 | 2 3/8 | 41 | 1 | 1 | 49560142 | 045242193233 |
| 64 | 2 1/2 | 41 | 1 | 1 | 49560147 | 045242193240 |
| 65 | 2 9/16 | 41 | 1 | 1 | 49560153 | 045242193271 |
| 67 | 2 5/8 | 41 | 1 | 1 | 49560158 | 045242193288 |
| 68 | 2 11/16 | 41 | 1 | 1 | 49560159 | 045242271030 |
| 70 | 2 3/4 | 41 | 1 | 1 | 49560163 | 045242193295 |
| 73 | 2 7/8 | 41 | 1 | 1 | 49560167 | 045242193325 |
| 76 | 3 | 41 | 1 | 1 | 49560173 | 045242193332 |
| 79 | 3 1/8 | 41 | 1 | 1 | 49560177 | 045242193349 |
| 83 | 3 1/4 | 41 | 1 | 1 | 49560183 | 045242193370 |
| 86 | 3 3/8 | 41 | 1 | 1 | 49560187 | 045242193387 |
| 89 | 3 1/2 | 41 | 1 | 1 | 49560193 | 045242193394 |
| 92 | 3 5/8 | 41 | 1 | 1 | 49560197 | 045242193431 |
| 95 | 3 3/4 | 41 | 1 | 1 | 49560203 | 045242193448 |
| 98 | 3 7/8 | 41 | 1 | 1 | 49560207 | 045242193479 |
| 102 | 4 | 41 | 1 | 1 | 49560213 | 045242193486 |
| 105 | 4 1/8 | 41 | 1 | 1 | 49560217 | 045242193493 |
| 108 | 4 1/4 | 41 | 1 | 1 | 49560223 | 045242193523 |
| 111 | 4 3/8 | 41 | 1 | 1 | 49560227 | 045242193530 |
| 114 | 4 1/2 | 41 | 1 | 1 | 49560233 | 045242193547 |
| 121 | 4 /2 4 ³ / ₄ | 41 | 1 | 1 | 49560237 | 045242193578 |
| 127 | 5 | 41 | 1 | 1 | 49560243 | 045242193585 |
| 133 | 5 ¹ / ₄ | 41 | 1 | 1 | 49560244 | 045242271078 |
| 140 | 5 ¹ / ₂ | 41 | 1 | 1 | 49560247 | 045242193592 |
| 152 | 6 | 41 | 1 | 1 | 49560253 | 045242193592 |
| 160 | 6 5/16 | 38 | 1 | 1 | 49300233 | 4002395365395 |
| 168 | 6 5/8 | 38 | 1 | 1 | 4932399886 | 4002393303393 |
| 177 | 6 31/32 | 38 | 1 | 1 | 4932399887 | 4002395365418 |
| 200 | 7 7/8 | 38 | 1 | 1 | 4932399888 | 4002395365425 |
| 210 | 8 ⁹ / ₃₂ | 38 | 1 | 1 | 4932399889 | 4002395365432 |
| 210 | U 132 | - 00 | | | 100200000 | .002300000102 |









HOLE DOZER™ bi-metal holesaws bulk packs

| Diameter (mm) | Ø (inch) | Max. cutting depth (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|-------------------------------|----------------------------|------------------|------------------------|----------------|--------------|
| 19 | 3/4 | 41 | 1 | 25 | 49565090 | 045242176199 |
| 20 | ²⁵ / ₃₂ | 41 | 1 | 25 | 49565091 | 045242528943 |
| 22 | 7/8 | 41 | 1 | 25 | 49565100 | 045242156375 |
| 25 | 1 | 41 | 1 | 25 | 49565110 | 045242156382 |
| 29 | 1 1/8 | 41 | 1 | 25 | 49565120 | 045242156399 |
| 30 | 1 3/16 | 41 | 1 | 25 | 49565125 | 045242243976 |
| 32 | 1 1/4 | 41 | 1 | 25 | 49565130 | 045242156412 |
| 35 | 1 3/8 | 41 | 1 | 25 | 49565140 | 045242156429 |
| 38 | 1 1/2 | 41 | 1 | 25 | 49565150 | 045242156436 |
| 41 | 1 5/8 | 41 | 1 | 25 | 49565152 | 045242176229 |
| 44 | 1 3/4 | 41 | 1 | 25 | 49565155 | 045242176267 |
| 51 | 2 | 41 | 1 | 25 | 49565160 | 045242156443 |
| 54 | 2 1/8 | 41 | 1 | 25 | 49565165 | 045242176366 |
| 57 | 2 1/4 | 41 | 1 | 25 | 49565167 | 045242176373 |
| 60 | 2 3/8 | 41 | 1 | 25 | 49565169 | 045242528950 |
| 64 | 2 1/2 | 41 | 1 | 25 | 49565170 | 045242156467 |
| 67 | 2 5/8 | 41 | 1 | 16 | 49565175 | 045242176380 |
| 68 | 2 11/16 | 41 | 1 | 16 | 49565178 | 045242528967 |
| 76 | 3 | 41 | 1 | 16 | 49565180 | 045242176397 |
| 89 | 3 1/2 | 41 | 1 | 9 | 49565190 | 045242176403 |
| 92 | 3 5/8 | 41 | 1 | 9 | 49565195 | 045242176410 |
| 102 | 4 | 41 | 1 | 9 | 49565200 | 045242176427 |
| 105 | 4 1/8 | 41 | 1 | 9 | 49565205 | 045242176434 |







HOLE DOZER™ bi-metal holesaws - sets

| | Description | Pack quantity | Min. order quantity | Article Number | EAN Code | (1) | |
|----|--|------------------|---------------------|----------------|---------------|------|---|
| 1) | Hole Dozer™ holesaw set (7pc) 5 x holesaws: Ø 19, 22, 25, 29, 32 mm. Arbor for Ø 14 - 30 mm (49567010). Spacer and adaptor. 1/₅″ allen key | 7 | 1 | 49224083 | 045242310760 | TERE | • |
| 2 | Hole Dozer™ holesaw set (10pc) 6 x holesaws: Ø 25, 32, 40, 54, 68, 76 mm. Arbor for Ø 14 - 30 mm (49567010). Arbor for Ø 32 - 152 mm (49569100). 2 x pilot drill bits. 1/6″ allen key | 10 | 1 | 49224201 | 045242348091 | 2 | |
| 3 | Hole Dozer™ holesaw set (14pc) 10 x holesaws: Ø 19, 22, 25, 29, 32, 35, 38, 44, 51, 57 mm. Arbor for Ø 14 - 30 mm (49567010). Arbor for Ø 32 - 152 mm (49569100). 2 x pilot drill bits. ¹ / ₈ allen key | 14 | 1 | 49224152 | 045242271047 | 3 | |
| 4 | Hole Dozer™ holesaw set (17pc) 13 x holesaws: Ø 20, 22, 25, 32, 40, 44, 51, 57, 64, 65, 67, 68, 76 mm. Arbor for Ø 14 - 30 mm (49567010). Arbor for Ø 32 - 152 mm (49569100). 2 x pilot drill bits. ½ allen key | 17 | 1 | 49224102 | 045242271054 | 4 | |
| \$ | Kit box for holesaws Arbor with pilot drill bit (49567010). Arbor with pilot drill bit (49569100). 2 x Pilot drill bits. 1/6" allen key (49960060) | 4 | 1 | 4932430327 | 4002395379880 | | |
| | | | | | | 5 | |

Bi-Metal contractor holesaws

Optimised variable 4/6 tooth geometry for faster cutting and universal use.

Bi-Metal teeth for best durability and increased wear resistance.

For universal use: steel, non ferrous metals, wood, drywall plasterboard, plastics.

| Diameter (mm) | Ø (inch) | Max. cutting depth (mm) | Pack quantity | Min. order | Article Number | EAN Code |
|---------------|-------------------------------|----------------------------|---------------|------------|----------------|---------------|
| | | , | | | | |
| 14 | 9/16 | 38 | 1 | 1 | 4932464671 | 4058546226169 |
| 16 | 5/8 | 38 | 1 | 1 | 4932464672 | 4058546226176 |
| 19 | 3/4 | 38 | 1 | 1 | 4932464673 | 4058546226183 |
| 20 | ²⁵ / ₃₂ | 38 | 1 | 1 | 4932464674 | 4058546226190 |
| 21 | 13/16 | 38 | 1 | 1 | 4932464675 | 4058546226206 |
| 22 | 7/8 | 38 | 1 | 1 | 4932464676 | 4058546226213 |
| 24 | 15/16 | 38 | 1 | 1 | 4932464677 | 4058546226220 |
| 25 | 1 | 38 | 1 | 1 | 4932464678 | 4058546226237 |
| 27 | 1 1/16 | 38 | 1 | 1 | 4932464679 | 4058546226244 |
| 29 | 1 ¹/s | 38 | 1 | 1 | 4932464680 | 4058546226251 |
| 30 | 1 3/16 | 38 | 1 | 1 | 4932464681 | 4058546226268 |
| 32 | 1 1/4 | 38 | 1 | 1 | 4932464682 | 4058546226275 |
| 35 | 1 ³ / ₈ | 38 | 1 | 1 | 4932464683 | 4058546226282 |
| 38 | 1 ¹ / ₂ | 38 | 1 | 1 | 4932464684 | 4058546226299 |
| 40 | 1 9/16 | 38 | 1 | 1 | 4932464685 | 4058546226305 |
| 43 | 1 11/16 | 38 | 1 | 1 | 4932464686 | 4058546226312 |
| 44 | 1 3/4 | 38 | 1 | 1 | 4932464687 | 4058546226329 |
| 48 | 1 7/8 | 38 | 1 | 1 | 4932464688 | 4058546226336 |
| 51 | 2 | 38 | 1 | 1 | 4932464689 | 4058546226343 |
| 54 | 2 1/8 | 38 | 1 | 1 | 4932464690 | 4058546226350 |
| 56 | 4/6 | 38 | 1 | 1 | 4932464691 | 4058546226367 |
| 57 | 2 1/4 | 38 | 1 | 1 | 4932464692 | 4058546226374 |
| 60 | 2 3/8 | 38 | 1 | 1 | 4932464693 | 4058546226381 |
| 64 | 2 1/2 | 38 | 1 | 1 | 4932464694 | 4058546226398 |
| 65 | 2 9/16 | 38 | 1 | 1 | 4932464695 | 4058546226404 |
| 67 | 2 5/8 | 38 | 1 | 1 | 4932464696 | 4058546226411 |
| 68 | 2 11/16 | 38 | 1 | 1 | 4932464697 | 4058546226428 |
| 70 | 2 3/4 | 38 | 1 | 1 | 4932464698 | 4058546226435 |
| 73 | 2 7/8 | 38 | 1 | 1 | 4932464699 | 4058546226442 |
| 76 | 3 | 38 | 1 | 1 | 4932464700 | 4058546226459 |
| 79 | 3 1/8 | 38 | 1 | 1 | 4932464701 | 4058546226466 |
| 83 | 3 1/4 | 38 | 1 | 1 | 4932464702 | 4058546226473 |
| 89 | 3 1/2 | 38 | 1 | 1 | 4932464703 | 4058546226480 |
| 92 | 3 5/8 | 38 | 1 | 1 | 4932464704 | 4058546226497 |
| 98 | 3 7/8 | 38 | 1 | 1 | 4932464705 | 4058546226503 |
| 102 | 4 | 38 | 1 | 1 | 4932464706 | 4058546226510 |
| 105 | 4 ¹/8 | 38 | 1 | 1 | 4932464707 | 4058546226527 |
| 114 | 4 1/2 | 38 | 1 | 1 | 4932464708 | 4058546226534 |
| 121 | 4 3/4 | 38 | 1 | 1 | 4932464709 | 4058546226541 |
| 127 | 5 | 38 | 1 | 1 | 4932464710 | 4058546226558 |
| 152 | 6 | 38 | 1 | 1 | 4932464711 | 4058546226565 |







Bi-Metal contractor holesaw - sets

Optimised variable 4/6 tooth geometry for faster cutting and universal use.

Bi-Metal teeth for best durability and increased wear resistance.

For universal use: steel, non-ferrous metals, wood, drywall plasterboard, plastics.

| | | | | • | • |
|---|--|---------------|---------------------|----------------|---------------|
| | Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
| (| Bi-metal contractor holesaw set (10pc) 6 x Holesaws: Ø 25, 32, 40, 54, 68, 76 mm. 1x arbor for Ø 14 - 30 mm. 1 x arbor for Ø 32 - 152 mm. 2 x pilot drill bits. Allen key | 10 | 1 | 4932464719 | 4058546226640 |
| | Bi-Metal contractor holesaw set (14pc) | | | | |
| (| 10 x Holesaws: Ø 19, 22, 25, 29, 32, 35, 2 38, 44, 51, 57 mm. 1 x arbor for Ø 14 - 30 mm. 1 x arbor for Ø 32 - 152 mm. 2 x pilot drill bits. Allen key | 14 | 1 | 4932464720 | 4058546226657 |





System accessories - Holesaws

| | | Description | Fits holesaw Ø | Shank reception | Holesaw or core reception | Pack quantity | Min. order quantity | Article Number | EAN Code | | | |
|-----|-----|--|-------------------|--------------------|---------------------------------|------------------|---------------------|----------------|---------------|------------|--------|------|
| | 1 | Fixtec "Twist Release" quick change arbor | Ø 14-30 mm | 9.5 mm Hex | ½″ x 20 | 1 | 1 | 49567210 | 045242225774 | 1 | | 8 |
| | 2 | Arbor | Ø 14-30 mm | 9.5 mm Hex | ½″ x 20 | 1 | 1 | 49567010 | 045242200177 | 2 | | ~ |
| | 3 | Arbor | Ø 32-210 mm | 9.5 mm Hex | %″ x 18 | 1 | 1 | 49567250 | 045242225798 | | | |
| | 4 | Arbor | Ø 32-210 mm | 11 mm Hex | %″ x 18 | 1 | 1 | 49569100 | 045242200832 | 3 | | • |
| 3 | (5) | SDS-Plus arbor | Ø 14-30 mm | SDS-Plus | ½″ x 20 | 1 | 1 | 4932471694 | 4058546295936 | | - offe | |
| NEW | 6 | SDS-Plus arbor | Ø 32-210 mm | SDS-Plus | %″ x 18 | 1 | 1 | 4932471695 | 4058546295943 | 4 | - | • |
| | 7 | Extension - 330 mm long | - | 9.5 mm Hex | - | 1 | 1 | 48284008 | 045242225811 | ⑤ 1 | | F-5 |
| | 8 | Extension - 300 mm long | - | 11 mm Hex | - | 1 | 1 | 48284006 | 045242122516 | 6 | | 35.4 |
| | | Pilot drill bit fit length | s to all arbor | rs Ø 6 mm and | d 89 mm | 1 | 1 | 49568010 | 045242200450 | 7 | | |
| | 9 | Pilot drill long 100 mm lengt | | arbors Ø 6 mi | m and | 1 | 1 | 49568000 | 045242200351 | 8 | | |
| | | Allen key 1/8" fo | or all arbors | | | 1 | 1 | 49960060 | 045242221455 | • | | |
| | | Grub screw for | r arbors | | | 1 | 1 | 06832712 | 4002395874354 | 9 | | |

Adjustable hole cutter

For cutting large diameter holes for air conditioning pipes, fans, downlights and ceiling speakers. Dust collection shroud for 100% dust free work when overhead drilling.

Diameter is adjustable from 51 mm to 178 mm in 6.4 mm steps.

Laser marked preset diameters at 51 - 178 mm.

Suitable for use on drywall (max. 25 mm) and ceiling tile. Not suitable for OSB wood boards.

| | Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|--|------------------|---------------------|----------------|--------------|
| | Adjustable hole cutter | | | | |
| 1 | Pilot drill, 2 blades, QL arbor and dust collection shroud | 5 | 1 | 49560260 | 045242350261 |
| 2 | QL arbor with 1/4" Hex reception. 75 mm long | 1 | 1 | 48281000 | 045242122622 |
| | Replacement blade and pilot drill set (4pc) | | | | |
| 3 | 1 x pilot drill bit, 2 x blades and 1 x allen key | 4 | 1 | 49560290 | 045242346370 |







HOLE DOZER™ holesaws: Recommended cutting speed in RPM

| ameter (mm) | Ø (inch) | Metal | Cast Iron | Steel | Non ferrous metal | Aluminium | Wood | MDF |
|-------------|---------------------------------|-------|-----------|----------|----------------------|-----------|------|-----|
| 14 | 9/16 | 580 | 400 | 300 | 790 | 900 | 1500 | 750 |
| 16 | 5/ ₈ | 550 | 365 | 275 | 730 | 825 | 1500 | 750 |
| 17 | 11/16 | 500 | 330 | 250 | 665 | 750 | 1500 | 750 |
| 19 | 3/4 | 460 | 300 | 230 | 600 | 690 | 1500 | 750 |
| 20 | 25/32 | 425 | 280 | 210 | 560 | 635 | 1500 | 750 |
| 21 | 13/16 | 425 | 280 | 210 | 560 | 635 | 1500 | 750 |
| 22 | 7/8 | 390 | 260 | 195 | 520 | 585 | 1500 | 750 |
| 23 | 29/32 | 370 | 250 | 185 | 500 | 550 | 1500 | 750 |
| 25 | 1 | 350 | 235 | 175 | 470 | 525 | 1500 | 750 |
| 27 | 1 1/16 | 325 | 215 | 160 | 435 | 480 | 1400 | 700 |
| 29 | 1 1/8 | 300 | 200 | 150 | 400 | 450 | 1400 | 700 |
| 30 | 1 3/16 | 285 | 190 | 145 | 380 | 425 | 1400 | 700 |
| 32 | 1 1/4 | 275 | 180 | 140 | 380 | 410 | 1400 | 700 |
| 33 | 1 5/16 | 260 | 175 | 135 | 345 | 390 | 1400 | 700 |
| 35 | 1 ³ / ₈ | 250 | 165 | 125 | 330 | 375 | 1400 | 700 |
| 37 | 1 7/16 | 240 | 160 | 120 | 315 | 360 | 1400 | 700 |
| 38 | 1 1/2 | 230 | 150 | 115 | 300 | 345 | 1400 | 700 |
| 40 | 1 9/16 | 220 | 145 | 110 | 290 | 330 | 1200 | 600 |
| 41 | 1 5/8 | 210 | 140 | 105 | 280 | 315 | 1200 | 600 |
| 43 | 1 11/16 | 205 | 135 | 100 | 270 | 305 | 1200 | 600 |
| 44 | 1 3/4 | 195 | 130 | 95 | 260 | 295 | 1200 | 600 |
| 46 | 1 13/16 | 190 | 125 | 95 | 250 | 285 | 1200 | 600 |
| 48 | 1 7/8 | 180 | 120 | 90 | 240 | 270 | 1200 | 600 |
| 50 | 1 31/52 | 175 | 120 | 85 | 230 | 260 | 1200 | 600 |
| 51 | 2 | 170 | 115 | 85 | 230 | 255 | 1200 | 600 |
| 52 | 2 1/16 | 165 | 110 | 80 | 220 | 245 | 1200 | 600 |
| 54 | 2 1/8 | 150 | 100 | 75 | 200 | 225 | 1000 | 500 |
| 56 | 4/6 | 145 | 100 | 75 | 195 | 225 | 1000 | 500 |
| 57 | 2 1/4 | 145 | 100 | 75 | 195 | 225 | 1000 | 500 |
| 59 | 2 5/16 | 145 | 100 | 75 | 195 | 225 | 1000 | 500 |
| 60 | 2 3/8 | 140 | 95 | 70 | 190 | 220 | 1000 | 500 |
| 63 | 2 31/64 | 135 | 90 | 65 | 180 | 205 | 900 | 450 |
| 64 | 2 1/2 | 135 | 90 | 65 | 180 | 205 | 900 | 450 |
| 65 | 2 9/16 | 130 | 85 | 65 | 175 | 200 | 800 | 400 |
| 68 | 2 11/16 | 125 | 80 | 60 | 160 | 185 | 800 | 400 |
| 73 | 2 7/8 | 120 | 80 | 60 | 160 | 180 | 800 | 400 |
| 76 | 3 | 115 | 75 | 55 | 150 | 170 | 700 | 350 |
| 79 | 3 1/8 | 110 | 70 | 55 | 140 | 165 | 700 | 350 |
| 83 | 3 1/4 | 105 | 50 | 40 | 140 | 155 | 700 | 350 |
| 86 | 3 3/8 | 100 | 45 | 30 | 130 | 150 | 500 | 250 |
| 89 | 3 1/2 | 95 | 45 | 30 | 130 | 145 | 500 | 250 |
| 92 | 3 5/8 | 95 | 60 | 45 | 120 | 140 | 500 | 250 |
| 95 | 3 3/4 | 90 | 60 | 45 | 120 | 135 | 500 | 250 |
| 98 | 3 7/8 | 90 | 60 | 45 | 120 | 135 | 500 | 250 |
| 102 | 4 | 85 | 55 | 40 | 110 | 130 | 400 | 200 |
| 105 | 4 ¹ / ₈ | 80 | 55 | 40 | 110 | 120 | 400 | 200 |
| 111 | 4 ³ / ₈ | 80 | 50 | 40 | 100 | 120 | 300 | 150 |
| 114 | 4 1/2 | 75 | 50 | 35 | 100 | 105 | 300 | 150 |
| 121 | 4 3/4 | 75 | 50 | 35 | 95 | 95 | 300 | 150 |
| 127 | 5 | 65 | 45 | 30 | 90 | 90 | 200 | 100 |
| 133 | 5 1/4 | 60 | 40 | 25 | 85 | 85 | 200 | 100 |
| 140 | 5 ¹ / ₂ | 60 | 40 | 25 | 85 | 85 | 200 | 100 |
| 146 | 5 3/4 | 55 | 35 | 25 | 75 | 75 | 200 | 100 |
| 152 | 6 | 55 | 35 | 25 | 75 | 75 | 200 | 100 |
| 160 | 6 5/16 | 50 | 30 | 25 | 60 | 60 | 150 | 75 |
| 168 | 6 5/8 | 50 | 30 | 25 | 55 | 55 | 150 | 75 |
| 177 | 6 ³¹ / ₃₂ | 45 | 25 | 25 | 55 | 55 | 150 | 75 |
| 200 | 7 7/8 | 40 | 25 | 25 | 50 | 50 | 100 | 50 |
| 210 | 8 9/32 | 40 | 20 | 25 25 | 50 | 50 | 100 | 50 |
| 210 | U 132 | 40 | 20 | 23 | JU | 30 | 100 | 50 |



Speed kills!

Operating at higher speeds than those recommended will shorten the life of the holesaw and produce very innefficient cutting.



Feed Pressure:

Variables in material, work configuration should be considered. Apply sufficient feed pressure to aid good chip re-moval. Reduce the pressure when the holesaw becomes hot or if the teeth start to clog with material. Insufficient feed pressure will dull tooth points prematurely but too much pressure can totally destroy teeth.



Cooling Lubricant:

Cutting oil serves two purposes when sawing in metals. It cools the saw and the work piece. It reduces heat and abrasion which can shorten cutting life. It also aids re-moving swarf from the cutting surface. Using a cooling lubricant will extend the life of your holesaw by 500%.

BIG HAWG™ multi material holesaws

BIG HAWG™ multi material holesaws are ideal for electricians, carpenters, kitchen fitters and all related heating, ventilation and plumbing trades.

Designed for use in a wide variety of materials:

Bricks* - suitable for both solid bricks and bricks with cavities.

Aerated concrete blocks*, lightweight aggregate blocks and breeze blocks.

Soft density lime-sandstone building blocks up to hardness of 30 N/mm².

Softwoods, chipboard, plywood, medium density fibreboard (MDF).

Plastics and plastic coated board (Contiboard).

Gypsum / plaster board.

* Not suitable for use in hard materials such as concrete, granite, medium to hard density lime-sandstone block, natural stone and hard brick over 30 N/mm² hardness.

| Diameter (mm) | Max. cutting depth (mm) | No. of teeth | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|----------------------------|--------------|------------------|---------------------|----------------|---------------|
| 25 | 60 | 2 | 1 | 1 | 4932464921 | 4058546228668 |
| 30 | 60 | 2 | 1 | 1 | 4932464922 | 4058546228675 |
| 35 | 60 | 2 | 1 | 1 | 4932464923 | 4058546228682 |
| 44 | 60 | 2 | 1 | 1 | 4932464924 | 4058546228699 |
| 51 | 60 | 3 | 1 | 1 | 4932464925 | 4058546228705 |
| 54 | 60 | 3 | 1 | 1 | 4932464926 | 4058546228712 |
| 57 | 60 | 3 | 1 | 1 | 4932464927 | 4058546228729 |
| 65 | 60 | 3 | 1 | 1 | 4932464928 | 4058546228736 |
| 68 | 60 | 3 | 1 | 1 | 4932464929 | 4058546228743 |
| 70 | 60 | 3 | 1 | 1 | 4932464930 | 4058546228750 |
| 76 | 60 | 3 | 1 | 1 | 4932464931 | 4058546228767 |
| 82 | 60 | 3 | 1 | 1 | 4932464932 | 4058546228774 |
| 92 | 60 | 3 | 1 | 1 | 4932464933 | 4058546228781 |
| 102 | 60 | 3 | 1 | 1 | 4932464934 | 4058546228798 |
| 108 | 60 | 3 | 1 | 1 | 4932464935 | 4058546228804 |
| 117 | 60 | 3 | 1 | 1 | 4932464936 | 4058546228811 |
| 133 | 60 | 3 | 1 | 1 | 4932464937 | 4058546228828 |
| 159 | 60 | 3 | 1 | 1 | 4932464938 | 4058546228835 |
| | | | | | | |





BIG HAWG™ multi material set

| escription | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|--|------------------|---------------------|----------------|---------------|--|
| IG HAWG™ multi material set (10 pc) x holesaws: Ø 35, 44, 51, 57, 68, 76 mm. x arbor with pilot drill. 2 x pilot drill. 1 x diamond | 10 | 1 | 4932464939 | 4058546228842 | |



BIG HAWG™ multi material system accessories

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---------------|---------------------|----------------|---------------|
| ① BIG HAWG™ multi material pilot drill | 1 | 1 | 4932464940 | 4058546228859 |
| ② BIG HAWG™ multi material arbor with pilot drill | 1 | 1 | 4932464941 | 4058546228866 |
| 3 Pilot drill flat bit 3/8" for wood only | 1 | 1 | 48271401 | 045242121397 |





HCS holesaws

NEW

Optimised 5 Tpi tooth geometry for clean cuts in soft materials. For use in plastics and drywall plasterboard.

| Diameter (mm) | Max. cutting depth (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|-------------------------|---------------|---------------------|----------------|---------------|
| 404 | ` , | | | 40004-00-0 | 1050510001700 |
| 121 | 96 | 1 | 1 | 4932472076 | 4058546324728 |
| 127 | 96 | 1 | 1 | 4932472077 | 4058546324735 |
| 133 | 96 | 1 | 1 | 4932472078 | 4058546324742 |
| 138 | 96 | 1 | 1 | 4932472079 | 4058546324759 |
| 150 | 96 | 1 | 1 | 4932472080 | 4058546324766 |
| 168 | 96 | 1 | 1 | 4932472081 | 4058546324773 |
| 172 | 96 | 1 | 1 | 4932472082 | 4058546324780 |
| 177 | 96 | 1 | 1 | 4932472083 | 4058546324797 |
| 186 | 96 | 1 | 1 | 4932472084 | 4058546324803 |
| 210 | 96 | 1 | 1 | 4932472085 | 4058546324810 |
| 212 | 96 | 1 | 1 | 4932472086 | 4058546324827 |
| 226 | 96 | 1 | 1 | 4932472087 | 4058546324834 |



System accessories - HCS holesaws

NEW

System accessories to be used with HCS holesaws.

- 1. Arbor with pilot drill
- 2. Pilot drill

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| HCS holesaws arbor with pilot drill | 1 | 1 | 4932472088 | 4058546324841 |
| ② HCS holesaw pilot drill Ø6 and 150 mm length | 1 | 1 | 4932472089 | 4058546324858 |





IMPACT HOLESAWS









- ① Thin wall
 - 8 TPI = smooth burr free holes
 - 0.6 mm thick = less resistance
- ② Shallow cup optimised for drilling thin metal
- 3 8% Cobalt Bi-Metal for best durability and lifetime
- 4 Ejection spring auto ejects slugs
- (5) Stop shoulder prevents over drilling
- 6 1/4" Hex shank = impact driver compatible

Suitability

Max. 2 mm steel, aluminium and stainless steel (max. 1.5 mm)

SHOCKWAVE™ IMPACT DUTY holesaws

| | Diameter (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----|--|------------------|---------------------|----------------|---------------|
| | 19 | 1 | 1 | 49569805 | 045242321094 |
| | 22 | 1 | 1 | 49569810 | 045242321100 |
| | 25 | 1 | 1 | 49569815 | 045242321117 |
| 1 | 29 | 1 | 1 | 49569820 | 045242321124 |
| | 32 | 1 | 1 | 49569825 | 045242321131 |
| | 35 | 1 | 1 | 49569830 | 045242321148 |
| | 38 | 1 | 1 | 49569835 | 045242321155 |
| (2) | SHOCKWAVE™ IMPACT DUTY holesaw set (3pc) Ø 22 / 29 / 35 mm | 3 | 1 | 49224800 | 045242321162 |
| | Ejection spring and grub screw | 1 | 1 | 4932430466 | 4002395381272 |
| | Pilot drill bit with arbor | 1 | 1 | 4932430477 | 4002395381388 |



DIAMOND MAX™ M14 DRY drill bits

NEW

Diamond grit continuous edge drills have been specifically developed for professionals that need to drill in extremely hard materials such as porcelain/gres/quarry tiles, cast iron or fibreglass where it is increasingly difficult to work with conventional drill bits. These drill bits guarantee excellent performance and superior lifetime even in the hardest of materials.

Dry bits: These diamond drill bits do not require the use of water for cooling purposes.

M14 thread: To fit directly onto an angle grinder.

Clean holes: Drills clean, precise holes without any perimeter scratches.

Lifetime: To ensure long lifetime, we use high grade diamond for fast cutting and a superior brazed bond matrix to give best durability.

Durability: Tough alloy body which does not bend or disort easily.

Easy slug ejection: Slug ejection slots on the larger sizes for greater leverage when removing tight slugs.

| Diameter (mm) | Reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------|------------------|------------------------|----------------|---------------|
| 5 | M14 | 1 | 1 | 4932471758 | 4058546296575 |
| 6 | M14 | 1 | 1 | 4932471759 | 4058546296582 |
| 8 | M14 | 1 | 1 | 4932471760 | 4058546296599 |
| 10 | M14 | 1 | 1 | 4932471761 | 4058546296605 |
| 12 | M14 | 1 | 1 | 4932471762 | 4058546296612 |
| 14 | M14 | 1 | 1 | 4932471763 | 4058546296629 |
| 16 | M14 | 1 | 1 | 4932471764 | 4058546296636 |
| DIAMOND MAX™ diamon set (4pc) Ø 6, 8, 10, 14 mm | d drill bit | 4 | 1 | 4932471863 | 4058546297626 |

How to use:

- 1. The diamond drills fit directly onto an angle grinder with M14 thread. Apply the spindle lock on the angle grinder and directly screw on the drill bits, tighten firmly with a spanner. If fitting the drill bit to the Milwaukee spot polisher first fix the adaptor 4932 4720 90 to the tool and then screw the drill bit onto the adaptor. Tighten firmly with a spanner.
- 2. If the tile is not fitted to a wall or floor ensure it is secured firmly with a clamp.
- 3. Switch on the tool to full speed. Slowly approach the tile with the drill bit at a 20-30° angle with light pressure to avoid skating on the tile. Once the drill bit starts to cut into the tile and forms a groove, gradually raise the drill so that it is horizontal (90°) with the tile.
- 4. Apply light pressure and an oscillating circular motion during cutting to maximise tool life.
- 5. When cutting material thicker than 10 mm, to optimise life and speed of cut, lift the drill/hole saw out of the hole every 5 seconds and allow it to rotate in the air to cool before continuing with the cut.

| Description | Tool reception | Shank reception | Pack quantity | Min. order quantity | ^r Article Number | EAN Code | |
|--|-------------------|-----------------|------------------|------------------------|-----------------------------|---------------|--|
| Adaptor to fit M14 diamond drills to Milwaukee spot polisher | M9 x 0.75 | M 14 | 1 | 1 | 4932472090 | 4058546324865 | |





Application areas

Ceramic tiles – all types hard and soft: Porcelain/Gres/Quarry/Terrazzo/Marbel/ Artifical stone/Terracota/Agglomerate/ Glazed

Cast iron

Fibreglass/GRP

(Glass reinforced plastic)/Perspex



DIAMOND PLUS 1/4 WET / DRY drill bits

Diamond grit edge drills and holesaws have been specially developed for professionals that need to drill in extremely hard materials such as porcelain/gres/quarry tiles, cast iron or fibreglass where it is increasingly difficult to drill with conventional holesaws. These holesaws guarantee excellent performance and superior life time even in the hardest of materials.

Water starved: These holesaws only require limited water supply unlike conventional diamond drills that require a continuous flow of water. Just dip the drill bit or holesaw into water at the start of each hole to be cut and thereafter every 5 second cut duration.

Clean holes: Drills clean, precise holes without any perimeter scratches.

Lifetime: To ensure long lifetime, we use high grade diamond for fast cutting and a superior brazed bond matrix to give best durability.

pest durability.

Durability: Tough alloy body which does not bend or distort easily.

Easy slug ejection: Offset slug ejection slots for greater leverage when removing tight slugs.

Versatile: Can be used either on angle grinders with relevant adaptor or with a drill.



| | Diameter (mm) | Reception | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|---|---------------|------------------|---------------------------|----------------|---------------|--|
| | 5 | 1/4" Hex | 1 | 1 | 49560503 | 045242223732 | |
| | 6 | 1/4" Hex | 1 | 1 | 49560505 | 045242223749 | |
| | 8 | 1/4" Hex | 1 | 1 | 49560507 | 045242223756 | |
| | 10 | 1/4" Hex | 1 | 1 | 49560509 | 045242223763 | |
| 1 | 12 | 1/4" Hex | 1 | 1 | 49560511 | 045242223770 | |
| | 15 | 1/4" Hex | 1 | 1 | 49560513 | 045242223787 | |
| | 20 | 1/4" Hex | 1 | 1 | 49560515 | 045242223794 | |
| | 25 | 1/4" Hex | 1 | 1 | 49560517 | 045242223800 | |
| | DIAMOND diamond o (3pc) Ø 6, 8, 10 | drill bit set | 3 | 1 | 4932471771 | 4058546296704 | |

Application areas

Ceramic tiles – all types hard and soft: Porcelain/Gres/Granite/Quarry/Terrazzo/ Artificial stone/Terracota/Agglomerate/Glazed


Cast iron

Fibreglass/GRP

(Glass reinforced plastic)/Perspex





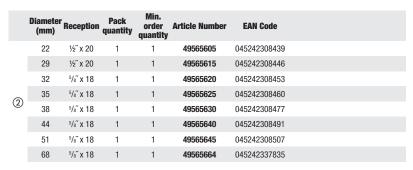





| Description | Fits holesaw Ø | Shank reception | Holesaw or core reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------|----------------|-----------------|---------------------------|------------------|---------------------|----------------|---------------|
| Arbor | Ø 14-30 mm | 9.5 mm Hex | ½″ x 20 | 1 | 1 | 49567010 | 045242200177 |
| Arbor | Ø 32-210 mm | 9.5 mm Hex | 5∕8″ x 18 | 1 | 1 | 49567250 | 045242225798 |
| Grinder adaptor | Ø 22-29mm | M14 | ½″ x 20 | 1 | 1 | 4932430464 | 4002395381258 |
| Grinder adaptor | Ø 32-68mm | M14 | %″ x 18 | 1 | 1 | 4932430465 | 4002395381265 |

How to use on an angle grinder:

- 1. Screw the grinder adaptor M14 to the holesaw and tighten firmly with a spanner. Then apply the spindle lock on the angle grinder and fit the adaptor directly onto the spindle; tighten firmly with a spanner.
- 2. If the tile is not fitted to a wall or floor ensure it is secured firmly with a clamp.
- 3. Dip the holesaw tips into water.
- 4. Switch on angle grinder to full speed. Slowly approach the tile with the holesaw at a 20-30° angle with light pressure to avoid skating on the tile. Once the holesaw starts to cut into the tile and forms a groove, gradually raise the holesaw so that it is horizontal with the tile.
- 5. Every 5 seconds dip the holesaw in water.
- 6. Apply light pressure and an oscillating circular motion during cutting to maximise tool life.

Holesaw drilling guide

Drilling guide provides a secure drilling into the material without slipping around and damaging the surface.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|---------------|
| Drilling guide for drills / holesaws Ø 19 - 68 mm | 1 | 1 | 4932352332 | 4002395369911 |





Wet Diamond Drilling Cores



THIN KERF Wet diamond drilling cores

NEW

Cordless optimised diamond segments designed especially for MXFuel tool.

Optimised for corded diamond drills up to 2200 Watt.

10 mm laser welded segments for superior lifetime.

Standard 1/2" G reception on smaller diameters & standard 1 1/4" UNC reception on bigger diameters.




| Diame- ter (mm) | Description | Fits DD3 - 152 | Fits MXF DCD 150 | Core reception | Working length (mm) B | length | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------|----------------|-------------------|------------------------|-------------------|-----------------------------|--------|------------------|---------------------------|-------------------|---------------|
| 12 | WCHP-TK 12 mm | ~ | ~ | 1/2" G | 200 | 270 | 1 | 1 | 4932472167 | 4058546325633 |
| 14 | WCHP-TK 14 mm | ~ | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472168 | 4058546325640 |
| 16 | WCHP-TK 16 mm | ~ | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472169 | 4058546325657 |
| 18 | WCHP-TK 18 mm | ~ | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472170 | 4058546325664 |
| 20 | WCHP-TK 20 mm | ~ | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472171 | 4058546325671 |
| 22 | WCHP-TK 22 mm | V | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472172 | 4058546325688 |
| 24 | WCHP-TK 24 mm | ~ | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472173 | 4058546325695 |
| 25 | WCHP-TK 25 mm | V | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472174 | 4058546325701 |
| 28 | WCHP-TK 28 mm | ~ | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472175 | 4058546325718 |
| 30 | WCHP-TK 30 mm | ~ | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472176 | 4058546325725 |
| 32 | WCHP-TK 32 mm | ~ | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472177 | 4058546325732 |
| 35 | WCHP-TK 35 mm | V | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472178 | 4058546325749 |
| 40 | WCHP-TK 40 mm | ~ | ~ | 1/2" G | 300 | 370 | 1 | 1 | 4932472180 | 4058546325763 |
| 51 | WCHP-TK 51 mm | ~ | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472184 | 4058546325800 |
| 56 | WCHP-TK 56 mm | ~ | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472185 | 4058546325817 |
| 61 | WCHP-TK 61 mm | ~ | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472186 | 4058546325824 |
| 66 | WCHP-TK 66 mm | ~ | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472187 | 4058546325831 |
| 71 | WCHP-TK 71 mm | ~ | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472188 | 4058546325848 |
| 76 | WCHP-TK 76 mm | ~ | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472189 | 4058546325855 |
| 81 | WCHP-TK 81 mm | ~ | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472190 | 4058546325862 |
| 86 | WCHP-TK 86 mm | ~ | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472191 | 4058546325879 |
| 91 | WCHP-TK 91 mm | ~ | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472192 | 4058546325886 |
| 101 | WCHP-TK 101 mm | · • | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472193 | 4058546325893 |
| 105 | WCHP-TK 105 mm | · • | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472194 | 4058546325909 |
| 111 | WCHP-TK 111 mm | · • | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472195 | 4058546325916 |
| 121 | WCHP-TK 121 mm | · • | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472196 | 4058546325923 |
| 130 | WCHP-TK 130 mm | · • | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472197 | 4058546325930 |
| 140 | WCHP-TK 140 mm | · • | V | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472198 | 4058546325947 |
| 150 | WCHP-TK 150 mm | · • | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932472199 | 4058546325954 |




Wet diamond drilling cores

| Diam- eter (mm) | Description WCHP- | Fits DD3- 152 | Fits DCM2- 250C & DCM2- 350C | Core recep- tion | Working length (mm) B | | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------|--------------------|---------------------|--|------------------------|-----------------------------|-----|------------------|------------------------|-------------------|---------------|
| 8 | SB 8 | ~ | • | ½″ G | 70 | 140 | 1 | 1 | 4932352072 | 4002395367269 |
| 12 | WCHP-SB 12 | ' | • | ½″ G | 200 | 270 | 1 | 1 | 4932352074 | 4002395367283 |
| 14 | WCHP-SB 14 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352075 | 4002395367290 |
| 16 | WCHP-SB 16 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352077 | 4002395367313 |
| 18 | WCHP-SB 18 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352078 | 4002395367320 |
| 20 | WCHP-SB 20 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352079 | 4002395367337 |
| 22 | WCHP-SB 22 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352080 | 4002395367344 |
| 24 | WCHP-SB 24 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352081 | 4002395367351 |
| 25 | WCHP-SB 25 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352082 | 4002395367368 |
| 28 | WCHP-SB 28 | V | • | ½″ G | 300 | 370 | 1 | 1 | 4932352083 | 4002395367375 |
| 30 | WCHP-SB 30 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352084 | 4002395367382 |
| 32 | WCHP-SB 32 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352085 | 4002395367399 |
| 35 | WCHP-SB 35 | V | • | ½″ G | 300 | 370 | 1 | 1 | 4932352086 | 4002395367405 |
| 37 | WCHP-SB 37 | V | • | ½″ G | 300 | 370 | 1 | 1 | 4932352087 | 4002395367412 |
| 40 | WCHP-SB 40 | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352088 | 4002395367429 |
| 42 | WCHP-SB 42 | V | • | ½″ G | 300 | 370 | 1 | 1 | 4932352089 | 4002395367436 |
| 45 | WCHP-SB | ~ | • | ½″ G | 300 | 370 | 1 | 1 | 4932352090 | 4002395367443 |
| 50 | WCHP-SB | V | • | ½″ G | 300 | 370 | 1 | 1 | 4932352092 | 4002395367467 |
| 52 | 50 WCHP 52 | | ~ | 1 ¼″ UNC | 450 | 525 | 1 | 1 | 4932399707 | 4002395363582 |
| 52 | WCHP-SB | V | | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932352734 | 4002395373925 |
| 62 | 52 WCHP 62 | • | ~ | 1 ¼″ UNC | | 525 | 1 | 1 | 4932399708 | 4002395363599 |
| 62 | WCHP-SB | ~ | | 1 ¼″ UNC | | 525 | 1 | 1 | 4932352735 | 4002395373932 |
| 72 | 62 WCHP 72 | · | ~ | 1 1/4" UNC | | 525 | 1 | 1 | 4932399709 | 4002395363605 |
| 82 | WCHP 82 | | ~ | 1 1/4" UNC | | 525 | 1 | 1 | 4932399710 | 4002395363612 |
| 82 | WCHP-SB | ~ | | 1 1/4" UNC | | 525 | 1 | 1 | 4932352736 | 4002395373949 |
| 92 | 82 WCHP 92 | • | V | 1 1/4" UNC | | 525 | 1 | 1 | 4932399711 | 4002395363629 |
| 92 | WCHP-SB | ~ | | 1 1/4" UNC | | 525 | 1 | 1 | 4932352737 | 4002395373956 |
| 102 | 92 WCHP | • | ./ | 1 1/4" UNC | | 525 | 1 | 1 | | 4002395363636 |
| 102 | 102 WCHP-SB | ~ | | 1 1/4" UNC | | 525 | 1 | 1 | 4932352738 | 4002395373963 |
| | 102 WCHP | | | | | | | | 4932399713 | |
| 112 | 112 WCHP-SB | | V | 1 1/″ UNC | | 525 | 1 | 1 | | 4002395363643 |
| 112 | 112 WCHP | - | | 1 1/4" UNC | | 525 | 1 | 1 | 4932352739 | 4002395373970 |
| 122 | 122 WCHP-SB | | ~ | 1 1/″ UNC | | 525 | 1 | 1 | 4932399714 | 4002395363650 |
| 122 | 122 WCHP | ~ | | 1 1/″ UNC | | 525 | 1 | 1 | 4932352740 | 4002395373987 |
| 132 | 132 WCHP-SB | | V | 1 1/4" UNC | | 525 | 1 | 1 | 4932399715 | 4002395363667 |
| 132 | 132 WCHP | ~ | | 1 1/4" UNC | | 525 | 1 | 1 | 4932352741 | 4002395373994 |
| 152 | 152 WCHP-SB | | V | 1 ¼″ UNC | | 525 | 1 | 1 | 4932399716 | 4002395363674 |
| 152 | 152 WCHP | ~ | | 1 1/4" UNC | | 525 | 1 | 1 | 4932352742 | 4002395374007 |
| 162 | 162 WCHP | | ~ | 1 1/4" UNC | | 525 | 1 | 1 | 4932399717 | 4002395363681 |
| 172 | 172 WCHP | | ~ | 1 ¼″ UNC | | 525 | 1 | 1 | 4932352052 | 4002395367092 |
| 182 | 182 | | ~ | 1 1/4" UNC | 450 | 525 | 1 | 1 | 4932399718 | 4002395363698 |
| 202 | WCHP 202 | | ~ | 1 ¼″ UNC | 450 | 525 | 1 | 1 | 4932399719 | 4002395363704 |
| 225 | WCHP 225 | | ~ | 1 ¼″ UNC | 450 | 525 | 1 | 1 | 4932399720 | 4002395363711 |
| 250 | WCHP 250 | | ~ | 1 ¼″ UNC | 450 | 525 | 1 | 1 | 4932399721 | 4002395363728 |
| 300 | WCHP 300 | | ~ | 1 ¼″ UNC | 450 | 525 | 1 | 1 | 4932399722 | 4002395363735 |
| 350 | WCHP 350 | | ~ | 1 ¼″ UNC | 450 | 525 | 1 | 1 | 4932399723 | 4002395363742 |


WCHP-SB Ø 8-50 mm



WCHP-SB Ø 52-152 mm



WCHP Ø 52-350 mm



System attachments - Wet diamond drilling

| | Fixing kit. For exclusive use n concrete. Ø 16 mm drill oit is required to set the drop anchor Stud bolt, setting tool, wing nut, washer and 5 pcs M12™ drop anchor 1 1/8″ open ended spanner. For holding the motor output spindle while removing a | V | 350C | | | | | | | |
|----------------------|---|-------------------------|-----------------|---|---|---|------------|---------------|-----------------------------------|-----------|
| 1 F | 1 3/8" open ended spanner. For holding the motor output spindle while removing a | | · | V | 9 | 1 | 4932399731 | 4002395363827 | D | # O |
| C | core bit | | V | | 1 | 1 | 49964705 | 045242222766 | 2 | |
| h | 32 mm ended spanner. For nolding the motor output spindle while removing a core bit. | ~ | | | 1 | 1 | 4931428009 | 4002395844791 | | O |
| F | 41 mm open ended spanner. For removing the core bit from the motor spindle. | V | ~ | | 1 | 1 | 4931428010 | 4002395844807 | | |
| 2 t 2 t s t | Fixtec release. Suitable for all diamond motors with 1 1/4 spindle reception. Prevents the core bit from locking itself too tight onto the machine spindle. The core bits can then be released and removed with minimum effort | V | V | | 1 | 1 | 4932352053 | 4002395367108 | ③ ■④ ● | <u> </u> |
| 1 a c | 11/4" female to 1/2" female adaptor: To enable the connection of <50 mm diamond core bits on a 1 1/4" machine spindle thread | ~ | ~ | | 1 | 1 | 4932352627 | 4002395372850 | (5) | Milwaukee |
| 1 | 1 1/4" female / male extention rod, length 300 mm | ~ | ~ | ~ | 1 | 1 | 4932399724 | 4002395363759 | | |
| | 1 1/4" female / male extention rod, length 500 mm | ~ | ~ | ~ | 1 | 1 | 4932399725 | 4002395363766 | | |
| 4 o | Felescopic extention. Extension pole used to fix drill rig to the ground instead of anchor bolts. Maximum oad of 500 kg and adjustable extension height from 1.8-2.9 m | V | V | V | 1 | 1 | 4932399732 | 4002395363834 | 6 | |
| 5 5 8 9 | Vacuum pump VP6: For fastening of the diamond drill rig on smooth and even surfaces. Suction capacity: 350 mbar. Max. vacuum pressure: 6 m³/h / 100 l/min. Rated voltage: 220-240 V | V | V | V | 1 | 1 | 4932352094 | 4002395367474 | 7 | 8 |
| | Vacuum plate. Replacement rubber seal 4931428665 | ~ | | | 1 | 1 | 4932352676 | 4002395373345 | | Milwanke |
| 7 b | WT 10 watertank. 10 liters capacity, steel, water tank with inside and outside oolyester coating. Reliable brass pump with a max. bressure bar of 6 bar. 2.5 m lose with quick connection system fits direct to willwaukee® diamond drills | V | V | V | 1 | 1 | 4932399726 | 4002395363773 | | DI. |
| | Nater collection ring: For use w | | | | 1 | 1 | 4932352677 | 4002395373352 | 8 | ø. |
| • | Replacement rubber ring for DR | | | | 1 | 1 | 4932352678 | 4002395373369 | | |
| | Nater collection ring: For use w 250 TV. For use with max. Ø 18 | | | V | 1 | 1 | 4932399727 | 4002395363780 | | |
| _ | Replacement rubber ring for DR | 250 TV | | ~ | 1 | 1 | 4932399729 | 4002395363803 | | |
| 9 3 | Nater collection ring: For use w 350 T. For use with max. Ø 300 | ith drill ri mm core | ig DR e bits | | 1 | 1 | 4932399728 | 4002395363797 | 9 | |
| F | Replacement rubber ring for DR | | | | 1 | 1 | 4932399730 | 4002395363810 | | |
| ① d | Spacer block T = 50 mm. Needs to be mouted between drill rig and motor cores > 250 mm and max. 350 mm. ncluded in drill rig DR 350 T | | ~ | | 1 | 1 | 4932399736 | 4002395363872 | | <u> </u> |
| n b | Quick connection motor mounting plate. Included in both drill rigs DR 250 TV and DR 350 T | | V | | 1 | 1 | 4932399733 | 4002395363841 | 10 | 200 |

FIXTEC Diamond Core System

The patented MILWAUKEE® range of FIXTEC diamond core adaptors allows changing diamond cores in a matter of seconds without the use of extra tools.

The most common complaint with existing systems is that the diamond core locks itself tight onto the machine making it increasingly difficult to later remove the core, even with the aid of spanners and wrenches. However with the new FIXTEC adaptor solution from MILWAUKEE® this is a problem of the past, the cores can be unscrewed, removed and exchanged quite simply by hand – there is no need for spanners or wrenches.

The revolutionary FIXTEC adaptors are available with or without dust absorption and with different tool receptions making them compatible to other manufacturers tools.

The Past



The Future



FIXTEC solution

FIXTEC solution with dust extraction

FIXTEC Clean Liner Rotor (CLR) fits to diamond cores with 1 1/4" UNC thread. The added advantage of dust absorption allows drilling speed to be increased and extends the lifetime of the diamond cores.

| Description | Tool reception | Core reception | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|------------------------------------|----------------|----------------|------------------|---------------------|----------------|---------------|--|
| ② FIXTEC Clean Line Rotor (CLR) | M18 x 2.5 | 1 1/4" UNC | 1 | 1 | 4932352172 | 4002395368242 | |



FIXTEC solution without dust extraction

FIXTEC adaptor fits to diamond cores with M16 thread. As centering drill bit a standard SDS-plus drill bit can be used.

| Description | Tool reception Co | ore reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------------|-------------------|---------------|------------------|---------------------|----------------|---------------|
| FIXTEC adaptor. Tool changing in | M18 x 2.5 | M16 | 1 | 1 | 4932399174 | 4002395357819 |
| seconds. No extra tool required | 11 mm Hex | M16 | 1 | 1 | 4932399220 | 4002395358342 |



Dry diamond cores with dust extraction - DCHXL

10 mm high segments for longer life.

Laser welded segments for extra durability.

Use with the machine set to rotary only, not suitable for hammer action.

During pre-drilling the centering unit (centering stars, guide rod and SDS Plus pilot drill bit) must be used.




| Material | DCHXL |
|---|----------|
| Aerated/breeze concrete blocks | * |
| Artificial stone - hard | × |
| Brick - very hard, engineering brick | ~ |
| Brick – medium | V |
| Brick - soft | • |
| Concrete | × |
| Most suitable. Recommended for these materials.Not suitable. Not recommended for these materials | i. |

| Material | DCHXL |
|--------------------------------|----------|
| Granite | × |
| Lime/sandstone - hard | ✓ |
| Lime/sandstone - soft/abrasive | • |
| Marble | × |
| Tiles | × |
| | |

Limited suitability – recommended for intermittent use.
 Very good in drilling characteristics, but reduced lifetime.

| | Description | Diameter (mm) | Core reception | Working length (mm) B | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------|------------------|-------------------|-----------------------------|---------------------------|------------------|------------------------|----------------|---------------|
| | DCHXL 38* | 38 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399753 | 4002395364060 |
| | DCHXL 52 | 52 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399163 | 4002395357703 |
| | DCHXL 68 | 68 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399164 | 4002395357710 |
| | DCHXL 82 | 82 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399165 | 4002395357727 |
| | DCHXL 102 | 102 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399166 | 4002395357734 |
| | DCHXL 107 | 107 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399754 | 4002395364077 |
| 1 | DCHXL 112 | 112 | 1 ¼" UNC | 420 | 490 | 1 | 1 | 4932399167 | 4002395357741 |
| | DCHXL 117 | 117 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399755 | 4002395364084 |
| | DCHXL 122 | 122 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399168 | 4002395357758 |
| | DCHXL 127 | 127 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399169 | 4002395357765 |
| | DCHXL 132 | 132 | 1 ¼" UNC | 420 | 490 | 1 | 1 | 4932399170 | 4002395357772 |
| | DCHXL 152 | 152 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399171 | 4002395357789 |
| | DCHXL 162 | 162 | 1 1/4" UNC | 420 | 490 | 1 | 1 | 4932399172 | 4002395357796 |



* During pre-drilling no centering star required.

| | Descript | ion T | ool reception | Core reception | Pack quantity | Min. order quantity | Article | e Number | EAN Code |
|---------------|---------------------------|------------------------|---|-----------------------|------------------|------------------------|-----------------|-------------------|-------------------------|
| 2 | FIXTEC CI Rotor (CL | | M18 x 2.5 | 1 1/4" UNC | 1 | 1 | 4932 | 352172 | 4002395368242 |
| | Descript | ion | | | Pack quantity | Min. order quantity | Article | Number | EAN Code |
| 3 | screw (49 (4931616 | 31622432 | 60. Supplied v 2). Requires allo SDS-plus pilot 2307071) | en key | 1 | 1 | 4932 | 399173 | 4002395357802 |
| 4 | Guide rod drill bit (Ø | for DD3-1 8 x 110 m | 52. Requires S nm, 49323070 | SDS-plus pilot 70) | 1 | 1 | 4932 | 352679 | 4002395373376 |
| | Diameter (mm) | Article Numbe | EVNIC | ode | | D | iameter (mm) | Article Number | , EAN Code |
| | 52 | 49313931 | 1 76 40023953 | 358380 | | | 117 | 49314035 | 08 4002395364107 |
| | 68 | 49313931 | 177 40023953 | 358397 | | | 122 | 49313931 | 81 4002395780709 |
| $\overline{}$ | 82 | 49313931 | 1 78 40023953 | 358403 | | | 127 | 49313931 | 82 4002395780716 |

132

152

162

4931393183 4002395358458

4931393184 4002395358465

4931393185 4002395358472







102

107

112

4931393179 4002395358410

4931403507 4002395364091

4931393180 4002395358427


Dry diamond cores for electrical sockets with dust extraction - DCHX

10 mm high segments for longer life.

Laser welded segments for extra durability.

Suitable for installation of electrical sockets and junction boxes.

Use with the machine set to rotary only, not suitable for hammer action.

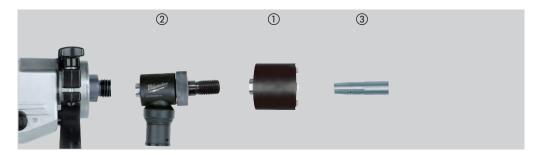

| Material | DCHX |
|--------------------------------------|----------|
| Aerated/breeze concrete blocks | • |
| Artificial stone - hard | × |
| Brick - very hard, engineering brick | V |
| Brick - medium | V |
| Brick - soft | • |
| Concrete | × |

| Material | DCHX |
|--------------------------------|----------|
| Granite | × |
| Lime/sandstone - hard | V |
| Lime/sandstone - soft/abrasive | • |
| Marble | × |
| Tiles | × |
| | |

- ✓ Most suitable. Recommended for these materials.
- Limited suitability recommended for intermittent use.

 Very good in drilling characteristics, but reduced lifetime.
- * Not suitable. Not recommended for these materials.

| material | DOM |
|--------------------------------|----------|
| Granite | × |
| Lime/sandstone - hard | V |
| Lime/sandstone - soft/abrasive | • |
| Marble | × |
| Tiles | × |
| | |
| | |

| | Descrip- tion | Diameter (mm) | Core reception | Working length (mm) B | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------|--------------------|------------------|-------------------|-----------------------------|---------------------------|------------------|------------------------|-------------------|---------------|
| 1 | DCHX 68 | 68 | 1 1/4" UNC | 60 | 130 | 1 | 1 | 4932399217 | 4002395358311 |
| () | DCHX 82 | 82 | 1 1/4" UNC | 60 | 130 | 1 | 1 | 4932399218 | 4002395358328 |



| Description | Tool reception | Core reception | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|------------------------------------|----------------|----------------|------------------|---------------------|----------------|---------------|--|
| ② FIXTEC Clean Line Rotor (CLR) | 9 M18 x 2.5 | 1 ¼″ UNC | 1 | 1 | 4932352172 | 4002395368242 | |



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| Guide rod for DD2-160 | | | | |
| Supplied with locking screw (4931622432). Requires allen key (4931616044) and SDS-plus gilot drill bit (8 x 110 mm, 4932307070) | 1 | 1 | 4932399221 | 4002395358359 |
| Guide rod for DD3-152. Requires SDS-plus pilot drill bit (8 x 110 mm, 4932307070) | 1 | 1 | 4932352680 | 4002395373383 |




Dry diamond drilling for electrical sockets without dust extraction - DCU / DCH

7 mm high segments.

Laser welded segments for extra durability.


Suitable for installation of electrical sockets and junction boxes.

Use with the machine set to rotary only, not suitable for hammer action.

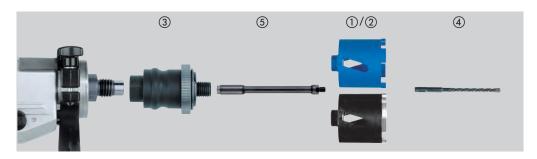

| Material | DCU | DCH |
|--------------------------------------|-----|-----|
| Aerated/breeze concrete blocks | • | • |
| Artificial stone - hard | × | × |
| Brick - very hard, engineering brick | • | ~ |
| Brick - medium | ~ | ~ |
| Brick - soft | ~ | • |
| Concrete | × | × |






- Most suitable. Recommended for these materials.
- Limited suitability recommended for intermittent use.

 Very good in drilling characteristics, but reduced lifetime.
- * Not suitable. Not recommended for these materials.
- ✓ Most suitable. Recommended for these materials.
 ◆ Limited suitability recommended for intermittent use.
- Limited suitability recommended for intermittent use.
 Very good in drilling characteristics, but reduced lifetime.
- * Not suitable. Not recommended for these materials.

| | Description | Diameter (mm) | Core reception | Working length (mm) B | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------|------------------|-------------------|-----------------------------|---------------------------|------------------|---------------------|-------------------|---------------|
| 1 | DCU 68 | 68 | M16 | 60 | 90 | 1 | 1 | 4932371978 | 4002395346035 |
| 1 | DCU 82 | 82 | M16 | 60 | 90 | 1 | 1 | 4932371979 | 4002395346042 |
| 2 | DCH 68 | 68 | M16 | 60 | 90 | 1 | 1 | 4932399579 | 4002395362080 |
| 2 | DCH 82 | 82 | M16 | 60 | 90 | 1 | 1 | 4932399580 | 4002395362097 |



| Description | Tool reception | Core reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|--------------------|-------------------|------------------|---------------------|----------------|---------------|
| FIXTEC adaptor. Tool | M18 x 2.5 | M16 | 1 | 1 | 4932399174 | 4002395357819 |
| 3 changing in seconds. No extra tool required | 11 mm Hex | M16 | 1 | 1 | 4932399220 | 4002395358342 |
| Requires SDS-plus pilot | t drill bit (Ø 8 x | 160 mm) | 1 | 1 | 4932307071 | 4002395308873 |



| Description | Adaptor reception | Core reception | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|-------------------|----------------|---------------------------|------------------|---------------------|-------------------|---------------|--|
| Extention between FIXTEC adaptor and diamond core | M16 | M16 | 300 | 1 | 1 | 4932369736 | 4002395346028 | |



Dry diamond drilling without dust extraction - DCH 150

10 mm high segments.

Laser welded segments for extra durability.

Use with the machine set to rotary only, not suitable for hammer action.



| Material | DCH |
|---|-----|
| Aerated/breeze concrete blocks | • |
| Artificial stone - hard | × |
| Brick - very hard, engineering brick | ~ |
| Brick - medium | V |
| Brick - soft | • |
| Concrete | × |
| Most suitable. Recommended for these materials. | |

| Material | DCH |
|--------------------------------|-----|
| Granite | × |
| Lime/sandstone - hard | ~ |
| Lime/sandstone - soft/abrasive | • |
| Marble | × |
| Tiles | × |
| | |

- Limited suitability recommended for intermittent use.
 Very good in drilling characteristics, but reduced lifetime.
 Not suitable. Not recommended for these materials.
- Most suitable. Recommended for these materials.
- Limited suitability recommended for intermittent use.

 Very good in drilling characteristics, but reduced lifetime.
- ★ Not suitable. Not recommended for these materials.

| Description | Diameter (mm) | Core reception | Working length (mm) B | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-------------|------------------|-------------------|-----------------------------|---------------------------|------------------|------------------------|-------------------|---------------|--|
| DCH 150-52 | 52 | M16 | 150 | 180 | 1 | 1 | 4932352628 | 4002395372867 | |
| DCH 150-62 | 62 | M16 | 150 | 180 | 1 | 1 | 4932352629 | 4002395372874 | |
| DCH 150-68 | 68 | M16 | 150 | 180 | 1 | 1 | 4932352630 | 4002395372881 | |
| DCH 150-82 | 82 | M16 | 150 | 180 | 1 | 1 | 4932352631 | 4002395372898 | |
| DCH 150-102 | 102 | M16 | 150 | 180 | 1 | 1 | 4932352632 | 4002395372904 | |
| DCH 150-127 | 127 | M16 | 150 | 180 | 1 | 1 | 4932352633 | 4002395372911 | |



1

| Description | Tool reception | Core reception | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|-------------------|-------------------|------------------|---------------------|----------------|---------------|
| FIXTEC adaptor. Tool | M18 x 2.5 | M16 | 1 | 1 | 4932399174 | 4002395357819 |
| changing in seconds. No extra tool required | 11 mm Hex | M16 | 1 | 1 | 4932399220 | 4002395358342 |
| 3 Requires SDS-plus pilo | ot drill bit (Ø 8 | x 260 mm) | 1 | 1 | 4932353821 | 4002395320141 |



| Description | Adaptor reception | Core reception | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------------|-------------------|---------------------------|------------------|---------------------|-------------------|---------------|
| Extention between FIXTEC adaptor and diamond core | M16 | M16 | 300 | 1 | 1 | 4932369736 | 4002395346028 |







DRIVING PERFORMANCE FORWARD



MILWAUKEE® SHOCKWAVE™ IMPACT DUTY driver bits are engineered to be the most durable, best fitting driver bits on the market. The WEAR GUARD TIP™ is laser hardened to create an outer shield that protects the fit over the life of the bit. The SHOCK ZONE™ is optimized for each tip type and length of driver bit, absorbing peak torque and preventing breaking. The customized CUSTOM ALLOY76™ steel and heat treatment for each tip type is engineered to ensure best performance across tip types and extended life vs. standard bits. The SHOCKWAVE™ impact driver bits provide extreme durability for the most demanding job site applications.





SHOCKWAVE™ IMPACT DUTY screwdriving bits

IMPACT

Designed for use with impact drivers the SHOCKWAVE™ IMPACT DUTY accessory line is not only ideal for heavy duty impact applications, but also delivers a full system solution for all the user's drilling and fastening needs.

SHOCK ZONE™ geometry - Designed to flex.

SHOCK ZONE™ reduces stress at the tip resulting in less tip breakages. The combination of the SHOCK ZONE™ design and special heat treatment absorbs impacts and allows the bit to flex with spring like action.

Precision milled tip provides the best fit with screw head, reducing cam out and stripping, resulting in outstanding lifetime.

Custom engineered steel - MILWAUKEE® custom metal formula makes the SHOCKWAVE™ bits more resistant to shock from impacting.





| | Туре | Total length (mm) | Supplied in | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------|------|-------------------------|-------------|---------------|---------------------|----------------|---------------|
| Philips | PH 1 | 25 | 1 | 2 | 1 | 4932430850 | 4002395385126 |
| | | 50 | 1 | 1 | 1 | 4932471564 | 4058546294632 |
| | | 90 | 1 | 1 | 1 | 4932430851 | 4002395385133 |
| | | | | | | | |
| | PH 2 | 25 | 1 | 2 | 1 | 4932430852 | 4002395385140 |
| | | 25 | 2 | 25 | 10 | 4932430853 | 4002395385157 |
| | | 50 | 1 | 1 | 1 | 4932430854 | 4002395385164 |
| | | 50 | 2 | 10 | 10 | 4932430855 | 4002395385171 |
| | | 90 | 1 | 1 | 1 | 4932430856 | 4002395385188 |
| | | 150 | 1 | 1 | 1 | 4932471565 | 4058546294649 |
| | | | | | | | |
| | PH 3 | 25 | 1 | 2 | 1 | 4932430857 | 4002395385195 |
| | | 50 | 1 | 1 | 1 | 4932430858 | 4002395385201 |
| | | 90 | 1 | 1 | 1 | 4932430859 | 4002395385218 |
| Pozidrive | | | | | | | |
| Poziurive | PZ 1 | 25 | 1 | 2 | 1 | 4932430860 | 4002395385225 |
| | | 25 | 2 | 25 | 10 | 4932430861 | 4002395385232 |
| | | 50 | 1 | 1 | 1 | 4932471566 | 4058546294656 |
| | | 90 | 1 | 1 | 1 | 4932430862 | 4002395385249 |
| | PZ 2 | 25 | (1) | 2 | 1 | 4932430863 | 4002395385256 |
| | | 25 | 2 | 25 | 10 | 4932430864 | 4002395385263 |
| | | 50 | (1) | 1 | 1 | 4932430865 | 4002395385270 |
| | | 50 | 2 | 10 | 10 | 4932430866 | 4002395385287 |
| | | 90 | 1 | 1 | 1 | 4932430867 | 4002395385294 |
| | | 150 | 1 | 1 | 1 | 4932471928 | 4058546298272 |
| | | | U | | | | |
| | PZ 3 | 25 | 1 | 2 | 1 | 4932430868 | 4002395385300 |
| | | 25 | 2 | 25 | 10 | 4932430869 | 4002395385317 |
| | | 50 | 1 | 1 | 1 | 4932430870 | 4002395385324 |
| | | 150 | 1 | 1 | 1 | 4932471929 | 4058546298289 |



A) 25 mm ¹/₄" Hex - DIN 3126 - C 6.3 B) 50 mm ¹/₄" Hex - DIN 3126 - E 6.3 C) 90 mm ¹/₄" Hex - DIN 3126 - E 6.3 D) 150 mm ¹/₄" Hex - DIN 3126 - E 6.3

(1) Blister





2 Storage container



Minimum order quantity = 10 pcs (come in counter display) orders. > 10 pcs must be ordered in multiples of 10 (i.e. 10, 20, 30)







| | Туре | Total length (mm) | Supplied in | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|--------------|----------------------|-------------|------------------|---------------------|----------------|---------------|
| Torx | TX 7 | 25 | (1) | 2 | 1 | 4932471567 | 4058546294663 |
| | | | 0 | | | | |
| | TX 8 | 25 | (1) | 2 | 1 | 4932471568 | 4058546294670 |
| | | | | | | | |
| | TX 9 | 25 | 1 | 2 | 1 | 4932471569 | 4058546294687 |
| | | | - | | | | |
| | TX 10 | 25 | 1 | 2 | 1 | 4932430871 | 4002395385331 |
| | | 50 | 1 | 1 | 1 | 4932471570 | 4058546294694 |
| | | | | | | | |
| | TX 15 | 25 | 1 | 2 | 1 | 4932430872 | 4002395385348 |
| | | 25 | 2 | 25 | 10 | 4932430873 | 4002395385355 |
| | | 50 | 1 | 1 | 1 | 4932451286 | 4002395157440 |
| | | 90 | 1 | 1 | 1 | 4932471571 | 4058546294700 |
| | | 150 | 1 | 1 | 1 | 4932471572 | 4058546294717 |
| | | | | | | | |
| | TX 20 | 25 | 1 | 2 | 1 | 4932430874 | 4002395385362 |
| | | 25 | 2 | 25 | 10 | 4932430875 | 4002395385379 |
| | | 50 | 1 | 1 | 1 | 4932430876 | 4002395385386 |
| | | 50 | 2 | 10 | 10 | 4932430877 | 4002395385393 |
| | | 90 | 1 | 1 | 1 | 4932430878 | 4002395385409 |
| | | 150 | 1 | 1 | 1 | 4932471573 | 4058546294724 |
| | | | | | | | |
| | TX 25 | 25 | 1 | 2 | 1 | 4932430879 | 4002395385416 |
| | | 25 | 2 | 25 | 10 | 4932430880 | 4002395385423 |
| | | 50 | 1 | 1 | 1 | 4932430881 | 4002395385430 |
| | | 50 | 2 | 10 | 10 | 4932430882 | 4002395385447 |
| | | 90 | 1 | 1 | 1 | 4932430883 | 4002395385454 |
| | | | _ | | | | |
| | TX 27 | 25 | 1 | 2 | 1 | 4932430884 | 4002395385461 |
| | TV 00 | 0.5 | | | | **** | 4000007007470 |
| | TX 30 | 25 | 1 | 2 | 1 | 4932430885 | 4002395385478 |
| | | 25 | 2 | 25 | 10 | 4932430886 | 4002395385485 |
| | | 50 | 1 | 10 | 1 | 4932430887 | 4002395385492 |
| | | 50 | 2 | 10 | 10 | 4932471574 | 4058546294731 |
| | | 90 | 1 | 1 | 1 | 4932471575 | 4058546294748 |
| | TX 40 | 25 | 1 | 2 | 1 | 4932430888 | 4002395385508 |
| | 17. 40 | 25 | 2 | 25 | 10 | 4932430889 | 4002395385515 |
| | | 50 | ① | 1 | 1 | 4932430890 | 4002395385522 |
| | | - 50 | | | | 1002100000 | |
| | TX 50 | 25 | 1 | 2 | 1 | 4932430891 | 4002395385539 |
| | | 25 | 2 | 15 | 10 | 4932430892 | 4002395385546 |
| | | _0 | 2 | | .0 | .000. | |

1 Blister





② Storage container



Minimum order quantity = 10 pcs (come in counter display) orders. > 10 pcs must be ordered in multiples of 10 (i.e. 10, 20, 30)

Counter display





| | Туре | Total length (mm) | Supplied in | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------|--------------|-------------------|-------------|------------------|---------------------|----------------|---------------|
| Torx BO | TX B07 | 25 | 1 | 2 | 1 | 4932471577 | 4058546294762 |
| | | | | | | | |
| | TX B08 | 25 | 1 | 2 | 1 | 4932471578 | 4058546294779 |
| | TX B09 | 25 | 1 | 2 | 1 | 4932471579 | 4058546294786 |
| | 17, 200 | 20 | U | - | · | 4002471070 | 4000040204700 |
| | TX B010 | 25 | 1 | 2 | 1 | 4932471580 | 4058546294793 |
| | | | | | | | |
| | TX B015 | 25 | 1 | 2 | 1 | 4932471581 | 4058546294809 |
| | TX B020 | 25 | 1 | 2 | 1 | 4932471582 | 4058546294816 |
| | | | 0 | | | | |
| | TX B025 | 25 | 1 | 2 | 1 | 4932471583 | 4058546294823 |
| | | | | | | | |
| | TX B030 | 25 | 1 | 2 | 1 | 4932471584 | 4058546294830 |
| | TX B040 | 25 | 1 | 2 | 1 | 4932471585 | 4058546294847 |
| | | | | | | | |
| Hex | Hex 2.5 mm | 25 | 1 | 2 | 1 | 4932430893 | 4002395385553 |
| | Have 2 mans | 0.5 | | 0 | | 4020420004 | 4000005005500 |
| | Hex 3 mm | 25 | 1 | 2 | 1 | 4932430894 | 4002395385560 |
| | Hex 4 mm | 25 | 1 | 2 | 1 | 4932430895 | 4002395385577 |
| | | | | | | | |
| | Hex 5 mm | 25 | 1 | 2 | 1 | 4932430896 | 4002395385584 |
| | Hex 6 mm | 25 | 1 | 2 | 1 | 4932430897 | 4002395385591 |
| | nox o min | 20 | U | - | · | 400240007 | 40020000001 |
| | Hex 8 mm | 25 | 1 | 2 | 1 | 4932430898 | 4002395385607 |
| | | | | | | | |
| | Hex 10 mm | 25 | 1 | 2 | 1 | 4932430899 | 4002395385614 |
| | Hex 12 mm | 25 | 1 | 2 | 1 | 4932430900 | 4002395385621 |
| | | | | | | | |
| Slotted | SL 0.6 x 4.5 | 25 | 1 | 2 | 1 | 4932430901 | 4002395385638 |
| | | a- | 0 | | | | 400000000000 |
| | SL 0.8 x 5.5 | 25 | 1 | 2 | 1 | 4932430902 | 4002395385645 |
| | SL 1.2 x 6.5 | 25 | 1 | 2 | 1 | 4932430903 | 4002395385652 |











| SHOCKWAVE" IMP | PAC | T DU | JTY SE | ets | | NEW |
|---|------------------|------------------------|----------------|---------------|-----------|-----|
| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | 7 |
| SHOCKWAVE™ IMPACT DUTY puck bit set (15 pc) SHOCKWAVE™ screwdriving bits: 14 x 25 mm length: 1 x PH1 / 2 x PH2. 1 x PZ1 / 1 x PZ3. 1 x TX10 / 2 x TX15 / 2 x TX20 / 1 x TX25 / 1 x TX30. 1 x SHOCKWAVE™ magnetic bit holder 60 mm length | 15 | 10 | 4932430904 | 4002395385669 | MANAGE C. | |
| SHOCKWAVE™ IMPACT DUTY bit set (32 pc) SHOCKWAVE™ screwdriving bits: 31 x 25 mm length: 1 x PH1 / 2 x PH2 / 1 x PH3, 1 x P21 / 2 x P22 / 1 x P23, 2 x TX10 / 2 x TX15 / 3 x TX20 / 2 x TX25 / 2 x TX30 / 1 x TX40, 1 x TX B07 / 1 x TX B08 / 1 x TX B09 / 1 x TX B010 / 1 x TX B015 / 1 x TX B020 / 1 x TX B025, 1 x Hex 3 mm / 1 x Hex 4 mm / 1 x Hex 5 mm / 1 x Hex 6 mm. 1 x SHOCKWAVE™ locking bit holder ¹/₄ Hex reception 73 mm long | 32 | 12 | 4932464240 | 4058546221850 | 2 | |

SHOCKWAVE™ IMPACT DUTY Torx bit set (32 pc)

SHOCKWAVE™ Torx screwdriving bits: 31 x 25 mm length: 2 x TX10 / 4 x TX15 / 5 x TX20 / 5 x TX25 / 3 5 x TX30 / 2 x TX40 / 1 x TX50, 1 x TX B07 / 1 x TX B08 / 1 x TX B09 / 1 x TX B010 / 1 x TX B015 / 1 x TX B020 / 1 x TX B025. 32 12 **4932471586** 4058546294854 1 x SHOCKWAVE $^{\scriptscriptstyle{TM}}$ locking bit holder $^1/4^{\prime\prime}$ Hex reception



4

(5)

SHOCKWAVE™ IMPACT DUTY bit set (33 pc)

73 mm long

SHOCKWAVE** screwdriving bits: 24 x 25 mm length 1 x PH1 / 2 x PH2 / 1 x PH3, 2 x PZ1 / 3 x PZ2 / 2 x PZ3, 2 x TX10 / 2 x TX15 / 3 x TX20 / 2 x TX25 / 4 2 x TX30 / 1 x TX40 / 1 x TX50. 5 x 50 mm length 1 x PH2 / 1 x PZ2, 1 x TX15 / 1 x TX20 / 1 x TX25. 3 x SHOCKWAVE** magnetic nut drivers: 48 mm length 1 x Hex 7 mm / 1 x Hex 8 mm / 1 x Hex 10 mm. 1 x SHOCKWAVE** magnetic bit holder 60 mm length length

SHOCKWAVE™ screwdriving bits: 24 x 25 mm length

33 **4932430905** 4002395385676 6



SHOCKWAVE™ IMPACT DUTY bit set (40 pc)

SHOCKWAVE $^{\rm m}$ screwdriving bits: 25 x 25 mm length 1 x PH1 / 2 x PH2, 1 x PZ1 / 3 x PZ2, 2 x TX10 / 2 x TX15 / 3 x TX20 / 2 x TX25 / 2 x TX30 / 1 x TX40 /

2 x TX15 / 3 x TX20 / 2 x 1X25 / 2 x 1X30 / 1 x 1x40 / 1 x TX50, 1 x Hex 4 mm / 1 x Hex 5 mm, 1 x SL 0.6 x 4.5 / 1 x SL 0.8 x 5.5 / 1 x SL 1.2 x 6.5 .8 x 50 mm length 1 x PH2, 1 x PZ1 / 1 x PZ2, 1 x TX10 / 1 x TX15 / 1 x TX20 / 1 x TX25 / 1 x TX30 . SHOCKWAVE™ agnetic bit holder: 1 x 60 mm length, 1 x 152 mm length. 3 x SHOCKWAVE™ ¼′ Hex drill bits: 0 3 / 4 / 5 mm. 2 x SHOCKWAVE™ magnetic nut drivers: 48 mm length 1 x Hex 8 mm / 1 x Hex 10 mm

4932430908 4002395385706



^{*}sets are supplied in a counter display when ordered according to min. order quantity.



SHOCKWAVE™ IMPACT DUTY sets

Pack Min. order Description **Article Number EAN Code** quantity quantity

SHOCKWAVE™ IMPACT DUTY bit set (48 pc)

SHOCKWAVE*** screwdriving bits: 32 x 25 mm length 2 x PH1 / 2 x PH2 / 1 x PH3, 2 x PZ1 / 3 x PZ2 / 1 x PZ3, 3 x TX10 / 3 x TX15 / 3 x TX20 / 3 x TX25 / 3 x TX30 / 1 x TX36 / 1 x TX40 / 3 x TX25 / 5 x TX30 / 1 x TX40 / 1 x TX40 / 1 x P4x 5 mm, 1 x SL 0.6 x 4.5 / 1 x SL 0.8 x 5.5 / 1 x SL 1.2 x 6.5. 8 x 50 mm length 1 x PH1 / 1 x PH2, 1 x PZ2, 1 x TX40 / 1 x TX45 / 1 x TX40 / 1 x TX45 / 1 x TX40 8 x 50 mm length 1 x PH1 / 1 x PH2, 1 x P22, 1 x TX10 / 1 x TX15 / 1 x TX20 / 1 x TX25 / 1 x TX30. 3 x 90 mm length 1 x P22, 1 x TX20 / 1 x TX25. 1 x SHOCKWAVETM magnetic bit holder 60 mm length. 4 x Shockwave ¹/₄ Hex drill bits: Ø 3 / 4 /

48 4932430906 4002395385683 6



SHOCKWAVE™ IMPACT DUTY bit set (56 pc)

SHOCKWAVE™ screwdriving bits: 48 x 25 mm length SHOUKWAVE "Screworning bits: 48 x 25 mm length 2 x PH1 / 3 x PH2 / 1 x PH3, 3 x PZ1 / 4 x PZ2 / 2 x PZ3, 3 x TX10 / 3 x TX15 / 4 x TX20 / 4 x TX25 / 2 x TX30 / 3 x TX40 / 2 x TX50, 2 x Hex 4 mm / 2 x Hex 5 mm, 2 x SL 0.6 x 4.5 / 2 x SL 0.8 x 5.5 / 2 x SL 1.2 x 6.5. 7 x 50 mm length 1 x PH2, 1 x PZ1 / 1 x PZ2, 1 x TX10 / 1 x TX55, 1 x SL 0.7 x 1 x SHOCKWAVE™ magnetic bit holder 60 mm length

56 6 4932430907 4002395385690



SHOCKWAVE™ IMPACT DUTY bit set (70 pc)

 $SHOCKWAVE^{\scriptscriptstyle{TM}}\ screwdriving\ bits:\ 60\ x\ 25\ mm\ length$ 1 x PH1 / 2 x PH2, 1 x PZ1 / 3 x PZ2 / 1 x PZ3 2 x TX10 / 4 x TX15 / 12 x TX20 / 12 x TX25 / 12 x TX30 / 2 x TX40 / 1 x TX50, 1 x TX B07 /

1 x TX B08 / 1 x TX B09 / 1 x TX B010 / 1 x TX B015, 1 x Hex 4 mm / 1 x Hex 5 mm. 12 x 50 mm length 1 x PH2, 1 x PZ1 / 1 x PZ2, 1 x TX10 / 2 x TX15 / 2 x TX20 / 2 x TX25 / 2 x TX30. 2 x SH0CKWAVE™ nut drivers 48 mm length: Hex 8 mm / Hex 10 mm. 1 x SH0CKWAVE™ magnetic bit holder 60 mm length

70 **4932471587** 4058546294861 6



(8)

9

SHOCKWAVE™ IMPACT DUTY bit set (75 pc)

SHOCKWAVE™ screwdriving bits: 60 x 25 mm length 1 x PH1 / 2 x PH2, 1 x PZ1 / 3 x PZ2 / 1 x PZ3, 2 x TX10 / 4 x TX15 / 12 x TX20 / 12 x TX25 / 12 x TX30 / 2 x TX40 / 1 x TX50, 1 x TX B07 / 1 x TX B08 / 1 x TX B09 / 1 x TX B010 / 1 x TX B015, 1 x Hex 4 mm / 1 x Hex 5 mm. 12 x 50 mm length 1 x PH2, 1 x PZ1 / 1 x PZ2, 1 x TX10 / 2 x TX15 / 2 x TX20 / 2 x TX25 / 2 x TX30 / 2 x SHOCKWAVE™ nut drivers 48 mm length: Hex 8 mm / Hex 10 mm 1 x SHOCKWAVE™ magnetic Hex 8 mm / Hex 10 mm. 1 x SHOCKWAVE™ magnetic bit holder 60 mm length

75 4932471588 4058546294878 6



^{*}sets are supplied in a counter display when ordered according to min. order quantity.





SHOCKWAVE™ IMPACT DUTY drive guide cassettes

Slimline pocket design.

Drive guide bit holder with extendable sleeve to hold long screws secure. Up to 110 mm total length. Front loading screwdriver handle.

Metal wire stripper for Ø 0.75 / 1.0 / 1.5 / 2.5 mm 2 .

Wire loop maker up to 5 mm².

| Description | Total length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|----------------------|------------------|---------------------|----------------|---------------|
| SHOCKWAVE™ IMPACT DUTY drive guide set (12pc) | е | | | | |
| 1 x PH2, 1 x PZ1 / 2 x PZ2 / 1 x PZ3 1 x TX15 / 1 x TX20 / 2 x TX25 / 1 x TX30 / 1 x TX40, 1 x drive guide bit holder 76 mm length. | | 12 | 10 | 4932430910 | 4002395385720 |





SHOCKWAVE™ IMPACT DUTY magnetic bit holder

Custom engineered steel and heat treatment for maximum strength and flexibility.

Optimised SHOCK ZONE™ absorbs up to 3X more torque for more resistance to shock from impacting. Strong magnetic tip for secure grip.

 1 / $^{\prime\prime}$ Hex reception (DIN 3126 - E 6.3). Very suitable for high torque and impact applications.

| Description | Total length A (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | | | A |
|---|------------------------|------------------|---------------------|----------------|---------------|--|---|---|
| ① Magnetic bit holder 60 mm | 60 | 1 | 1 | 4932352406 | 4002395370658 | | 0 | |
| 2 Magnetic bit holder 60 mm - jam jar (100pc) | 60 | 1 | 100 | 4932430478 | 4002395381395 | | 2 | |
| Magnetic bit holder 152 mm - long series | 152 | 1 | 1 | 4932471822 | 4058546297213 | | | |
| Magnetic bit holder 305 mm - long series | 305 | 1 | 1 | 4932471823 | 4058546297220 | | | |
| 3 | -A | | — A— | | | ————————————————————————————————————— | | |

^{*}drive guide is supplied in a counter display when ordered according to min. order quantity.



SHOCKWAVE™ IMPACT DUTY locking bit holder


Custom engineered steel - MILWAUKEE® custom metal formula makes the SHOCKWAVE™ bits more resistant to shock from impacting.

Optimised SHOCK ZONE™ absorbs up to 3X more torque.

Dual internal magnets ensure magnetism to fasteners.

Auto-Locking - One handed bit release.

1/4" Hex reception (DIN 3126 - E 6.3). Very suitable for high torque and impact applications.

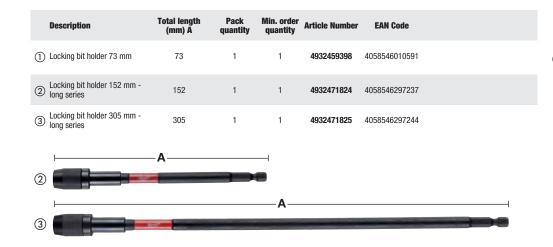





| | Description | Total length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 |
|---|--|----------------------|------------------|---------------------|----------------|---------------|-----|
| 1 | Socket adaptor: 1/4" Hex - 1/4" square. DIN 3126 - E 6.3 | 50 | 1 | 1 | 4932471826 | 4058546297251 | |
| 2 | Socket adaptor: $^{1}/^{''}_{4}$ Hex - $^{1}/^{''}_{2}$ square. DIN 3126 - E 6.3 | 50 | 1 | 1 | 4932471827 | 4058546297268 | (2) |





SHOCKWAVE™ IMPACT DUTY magnetic nut drivers

Custom engineered steel and heat treatment for maximum strength and extreme durability. Strong magnetic tip for secure grip.

1/4" Hex reception (DIN 3126 - E 6.3). Very suitable for high torque and impact applications.

| Size AF flats) | | For anchor thread size | Total length (mm) A | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------|----|------------------------|------------------------|------------------|---------------------|----------------|---------------|
| 5. | 5 | M3 | 65 | 1 | 1 | 4932352536 | 4002395371945 |
| 6. | 0 | M3.5 | 65 | 1 | 1 | 4932352537 | 4002395371952 |
| 1/2 | ű" | - | 65 | 1 | 1 | 4932352538 | 4002395371969 |
| 7. | 0 | M4 | 65 | 1 | 1 | 4932352539 | 4002395371976 |
| 5/1 | 6 | - | 65 | 1 | 1 | 4932352540 | 4002395371983 |
| 8. | 0 | M5 | 65 | 1 | 1 | 4932352541 | 4002395371990 |
| 3/8 | | - | 65 | 1 | 1 | 4932352542 | 4002395372003 |
| 10 | .0 | M6 | 65 | 1 | 1 | 4932352543 | 4002395372010 |
| 12 | .0 | M7 | 65 | 1 | 1 | 4932352544 | 4002395372027 |
| 13 | .0 | M8 | 65 | 1 | 1 | 4932352545 | 4002395372034 |
| 17 | .0 | M10 | 65 | 1 | 1 | 4932352546 | 4002395372041 |
| ① set (5pc) | | | netic nut driver | 5 | 1 | 4932352822 | 4002395374809 |









SHOCKWAVE™ right angle attachment

NEW

The right angle attachment is a useful device for screwdriving or drilling applications in restricted, difficult to reach areas.


Impact rated: suitable to use with latest 18V impact drivers as well as cordless drill drivers.

Internal SHOCK ZONE™ and advanced gear design for excellent power transmission and impact durability. For all 1/4" Hex driving and drilling accessories.

Very compact design: only 36 mm in height and a true 90° angle to allow access into confined spaces. Ergonomic rubber overmold for secure and comfortable handling.

Pack contains 1 x right angle attachment and 10 x 25 mm screwdriving bits.



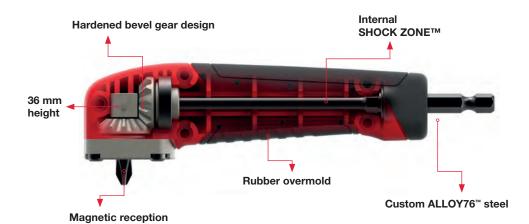





| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| Counter display SHOCKWAVE™ Right Angle Attachment set (11pc) 1 x Right Angle Attachment, 1 x PH2, 1 x PZ1 / 2 x PZ2 / 1 x PZ3, 1 x TX10 / 1 x TX15 / 1 x TX20 / 1 x TX25 / 1 x TX30 | 11 | 12 | 4932471274 | 4058546289027 |



KNUCKLE™ - Offset attachment

Impact rated: Can be used with both cordless and impact drills.

Very compact offset attachment.

Ideally suited to working in confined and limited spaces.

Solid metal construction to absorb impact action.

 0° and 30° positions.

1/4" Hex shank fits directly into the chuck preventing slippage.

Suitable for use with 1/4" Hex impact drivers up to 180 Nm torque.



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|---------------|
| Counter display KNUCKLE™ set (11pc) | | | | |
| 1 x KNUCKLE™, 1 x PH1 / 2 x PH2, 1 x PZ1 / 2 x PZ2 / 1 x PZ3, 1 x TX15 / 1 x TX20 / 1 x TX25 | 11 | 10 | 4932459781 | 4058546029531 |





Screwdriving bits



The ribs are cold formed to exact specification ensuring reduced wear from slippage. The tip is subjected to a special hardening process with temperatures up to 870°C.

The outcome is a bit with a hardness of 60 HRC. This extra hard tip ensures extra long life under constant use.

The body is manufactured from the highest quality S2 european steel.

The sign of quality: All bits are laser marked with the MILWAUKEE® logo and tip reception for easy identification.

| | Туре | Total length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------|-------|----------------------|------------------|---------------------|----------------|---------------|
| Phillips | PH 1 | 25 | 25 | 1 | 4932399586 | 4002395362363 |
| | PH 2 | 25 | 25 | 1 | 4932399587 | 4002395362370 |
| Q | PH 3 | 25 | 25 | 1 | 4932399588 | 4002395362387 |
| U | | | | | | |
| | | | | | | |
| Pozidrive | PZ 1 | 25 | 25 | 1 | 4932399589 | 4002395362394 |
| | PZ 2 | 25 | 25 | 1 | 4932399590 | 4002395362400 |
| | PZ 3 | 25 | 25 | 1 | 4932399591 | 4002395362417 |
| | | | | | | |
| | | | | | | |
| Torx | TX 10 | 25 | 25 | 1 | 4932399594 | 4002395362448 |
| | TX 15 | 25 | 25 | 1 | 4932399595 | 4002395362455 |
| | TX 20 | 25 | 25 | 1 | 4932399596 | 4002395362462 |
| | TX 25 | 25 | 25 | 1 | 4932399597 | 4002395362479 |
| | TX 30 | 25 | 25 | 1 | 4932399599 | 4002395362493 |
| | TX 40 | 25 | 25 | 1 | 4932399600 | 4002395362509 |

Magnetic bit holders

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|------------------|---------------------|----------------|---------------|--|
| Magnetic bit holder with quick release clutch, total length 58 mm | 1 | 1 | 4932373483 | 4002395351060 | |
| Magnetic bit holder for drywall | 1 | 1 | 4932430179 | 4002395378401 | |

Screwdriving bit cassettes

This high quality cassette aimed at the professional user is available in 3 different assortments.

Slimline pocket design: 110 mm x 65 mm x 15 mm.

Secure latch system - easy opening and safe closing.

Extra side compartment accepts either 50 mm screwdriving bits or drill bits.

Front window to protect bits from dust.

High quality screwdriving bits with hardness of 60 HRC and $^{1/4}$ " Hex reception. 25 mm bits manufactured according to DIN 3126 - C 6.3. 50 mm bits are manufactured according to DIN 3126 - E 6.3.

Magnetic bit holder with quick release clutch.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|------------------|---------------------|----------------|---------------|--|
| Compact screwdriving bit set (12pc) 25 mm: SL 0.8 x 5.5 mm x 1. 25 mm: PH 1 x 1 / PH 2 x 2 / PH 3 x 1. 25 mm: PZ 1 x 1 / PZ 2 x 2 / PZ 3 x 1. 50 mm: PH 2 x 1. 50 mm: PZ 2 x 1. Magnetic bit holder with quick release clutch | 12 | 1 | 4932399513 | 4002395361601 | |



Screwdriving bits sets

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 |
|---|------------------|---------------------|----------------|---------------|---|
| Screwdriving bits et (35pc) Screwdriving bits 25 mm length: PH 1 x 2 / PH 2 x 3 / PH 3 x 2. PZ 1 x 2 / PZ 2 x 3 / PZ 3 x 2. TX 10 x 2 / TX 15 x 2 / TX 20 x 3. TX 25 x 3 / TX 30 x 2 / TX 40 x 2. Screwdriving bits 50 mm length: PH 1 x 1 / PH 2 x 1. PZ 1 x 1 / PZ 2 x 1. TX 20 x 1 / TX 25 x 1. 1 x magnetic bit holder with 1/4 Hex reception | 35 | 6 | 4932352068 | 4002395367214 | 2 |
| Screwdriving bits et (27pc) Screwdriving bits 25 mm length: PH 1 x 2 / PH 2 x 2 / PH 3 x 1. PZ 1 x 2 / PZ 2 x 4 / PZ 3 x 2. TX 10 x 2 / TX 15 x 3 / TX 20 x 3. TX 25 x 3 / TX 30 x 1 / TX 40 x 1. Magnetic bit holder with quick release clutch. | 27 | 1 | 4932352747 | 4002395374052 | |

OSD2 - Offset screwdriver/ drill angle attachment











With the most skilled tradesmen in mind, MILWAUKEE® continues to increase its variety of impact wrenches to allow for further versatility on the jobsite. Alongside this, MILWAUKEE® have widened our range of SHOCKWAVE™ IMPACT DUTY sockets by introducing even more reception sizes to our extensive line of products.







1/2"



NEW 3/4"



NEW

1/4" SHOCKWAVE™ IMPACT DUTY impact sockets - set

| Descr | ription | | | Pa quar | | n. order uantity | Article Number | EAN Code | |
|--|---|--|--|----------------------|--------|---------------------|----------------|---------------|-----|
| 12 x ¹ / 10 / 1 ¹ / 6 x sci TX 15, ¹ / ₄ " He: ¹ / ₄ " squ | HOCKWAVE** I) /4" sockets: 4 / 1 / 12 / 13 mr rewdriving bit , TX 20, TX 25 x > 1/4" square uare (F) > 1/4" r for screwdriv | / 4.5 / 5 / 5.5 m. 50 mm to s 25 mm in I s, TX 30. 1 x s drive. 1 x bi Hex. 1 x 60m | i / 6 / 7 / 8 / 9 tal length. ength: PH 2, l socket adaptor it adaptor | 9 / PZ 2, 2 or | 1 | 1 | 4932352862 | 4002395375202 | |
| A | B (MM) | C (MM) | D (MM) | E (MM) | F (MM) | | | | |
| 1/4" | 4 | 50 | 3 | 7.7 | 12.8 | | 4 | 100 | |
| 1/4" | 4.5 | 50 | 3.5 | 8 | 12.8 | | | | |
| 1/4" | 5 | 50 | 4 | 8.8 | 12.8 | | | | |
| 1/4" | 5.5 | 50 | 4.5 | 9.5 | 12.8 | | | | |
| 1/4" | 6 | 50 | 6 | 9.8 | 12.8 | | | | |
| 1/4" | 7 | 50 | 6 | 11.4 | 12.8 | | | | |
| 1/4" | 8 | 50 | 7.5 | 12.5 | 12.8 | | | THE PARTY | |
| 1/4" | 9 | 50 | 7.5 | 13.8 | 13.8 | | | A CONTRACT | |
| 1/4" | 10 | 50 | 9 | 14.3 | 14.3 | | | | |
| 1/4" | 11 | 50 | 11 | 16.8 | 16.8 | | | | 108 |
| 1/4" | 12 | 50 | 12 | 17.8 | 17.8 | | | | |
| 1/4" | 13 | 50 | 12 | 18.8 | 18.8 | | | (1) | |





1/2" SHOCKWAVE™ IMPACT DUTY impact sockets - deep

SHOCKWAVE™ IMPACT DUTY steel (Chrome-Molybdenum) is high quality alloy steel which provides ultimate strength and durability.

Best fitting due to 6 gripping points.


Recessed corners allow torque to be transferred across the flats of the socket rather than producing stress on the points or corners.

Thin wall construction provides access to tight spaces.

Deep wall construction provides clearance for protruding bolts.

Laser etched size markings for easy identification and won't wear off.

| | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | For anchor thread size | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|--|-----------|-----------|-----------|-----------|---------------------------------|------------------|---------------------------|-------------------|---------------|
| | ½" square | 8 | 78 | 12 | 15 | M5 | 1 | 1 | 4932352847 | 4002395375059 |
| | ½" square | 10 | 78 | 12 | 17 | M6 | 1 | 1 | 4932352848 | 4002395375066 |
| | ½" square | 11 | 78 | 12 | 18 | - | 1 | 1 | 4932352849 | 4002395375073 |
| | ½" square | 12 | 78 | 12 | 19 | M7 | 1 | 1 | 4932352850 | 4002395375080 |
| | ½" square | 13 | 78 | 12 | 20 | M8 | 1 | 1 | 4932352851 | 4002395375097 |
| | ½" square | 14 | 78 | 15 | 22 | M9 | 1 | 1 | 4932352852 | 4002395375103 |
| | ½" square | 15 | 78 | 15 | 23.4 | - | 1 | 1 | 4932471737 | 4058546296360 |
| | ½" square | 16 | 78 | 15 | 23.8 | - | 1 | 1 | 4932352853 | 4002395375110 |
| | ½" square | 17 | 78 | 18 | 25.8 | M10 | 1 | 1 | 4932352854 | 4002395375127 |
| | ½" square | 18 | 78 | 20 | 25.4 | - | 1 | 1 | 4932471738 | 4058546296377 |
| | ½" square | 19 | 78 | 21 | 27.8 | M12 | 1 | 1 | 4932352855 | 4002395375134 |
| | ½" square | 21 | 78 | 24 | 29.8 | - | 1 | 1 | 4932352856 | 4002395375141 |
| | ½" square | 22 | 78 | 24 | 31.8 | M14 | 1 | 1 | 4932471166 | 4058546287948 |
| | ½" square | 24 | 78 | 24 | 33.8 | M16 | 1 | 1 | 4932352857 | 4002395375158 |
| | ½" square | 27 | 78 | 24 | 37.8 | M18 | 1 | 1 | 4932352858 | 4002395375165 |
| | ½" square | 30 | 78 | 24 | 41.8 | M20 | 1 | 1 | 4932352859 | 4002395375172 |
| | ½" square | 32 | 78 | 24 | 43.8 | M22 | 1 | 1 | 4932352860 | 4002395375189 |
| 1 | 1/2" SHOCKV (10 pc) Contents: 8 21 mm | | | | | | 10 | 1 | 4932352861 | 4002395375196 |

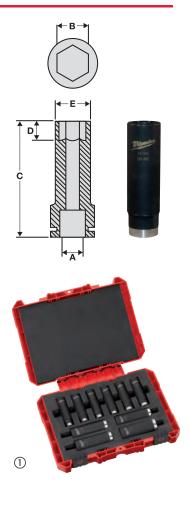

1/2" SHOCKWAVE™ IMPACT DUTY automotive impact socket set

Colour coded for easy identification.

Made from high quality alloy steel for strength and durability.

Set includes ½" impact sockets of 17 mm, 19 mm and 21 mm length.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| Automotive impact socket set (3pc) | 2 | 1 | 4932451568 | 4002395140091 |
| 17 mm, 19 mm and 21 mm 1/2" impact sockets | 3 | | | 4002393140091 |



1/2" impact sockets - adaptors

| Description | Total length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------------|------------------|------------------------|----------------|---------------|
| Socket adaptor: 1/2" square - 1/4" Hex To accept screwdriving bits | . 50 | 1 | 1 | 4932471828 | 4058546297275 |





3/4" SHOCKWAVE™ IMPACT DUTY impact sockets - deep

NEW

SHOCKWAVE™ IMPACT DUTY steel (Chrome-Molybdenum) is high quality alloy steel which provides ultimate strength and durability. According to DIN 3129 / ISO 2725-2, internal square drive according to DIN 3121 / ISO 1174-2.


6 gripping points for precise fitting.

Recessed corners allow torque to be transferred across the flats of the socket rather than producing stress on the points or corners.

Deep wall construction provides clearance for protruding bolts.

Laser etched size markings for easy identification and won't wear off.

| A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | For anchor thread size | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------|-----------|-----------|-----------|-----------|------------------------|------------------|---------------------------|----------------|---------------|
| ¾" square | 17 | 90 | 38 | 30 | M10 | 1 | 1 | 4932471642 | 4058546295417 |
| ¾" square | 19 | 90 | 38 | 33 | M12 | 1 | 1 | 4932471643 | 4058546295424 |
| ¾" square | 21 | 90 | 38 | 35 | - | 1 | 1 | 4932471644 | 4058546295431 |
| ¾" square | 22 | 90 | 38 | 37 | M14 | 1 | 1 | 4932471645 | 4058546295448 |
| ¾" square | 24 | 90 | 38 | 39 | M16 | 1 | 1 | 4932471646 | 4058546295455 |
| ¾" square | 27 | 90 | 38 | 43 | M18 | 1 | 1 | 4932471647 | 4058546295462 |
| ¾" square | 30 | 90 | 38 | 46 | M20 | 1 | 1 | 4932471648 | 4058546295479 |
| ¾" square | 32 | 90 | 38 | 49 | M22 | 1 | 1 | 4932471649 | 4058546295486 |
| ¾" square | 33 | 90 | 38 | 51 | - | 1 | 1 | 4932471650 | 4058546295493 |
| ¾" square | 36 | 90 | 38 | 54 | M24 | 1 | 1 | 4932471651 | 4058546295509 |
| ¾" square | 41 | 90 | 38 | 60 | M27 | 1 | 1 | 4932471652 | 4058546295516 |
| ¾" square | 46 | 90 | 38 | 66 | M30 | 1 | 1 | 4932471653 | 4058546295523 |
| ¾" square | 50 | 90 | 38 | 71 | M33 | 1 | 1 | 4932471654 | 4058546295530 |





NEW

Impact rated socket extensions for facilitated bolt access in restricted areas.

SHOCKWAVE™ IMPACT DUTY steel (chrome-molybdenum) is high quality alloy steel which provides ultimate strength and durability.

| Description | Total length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------|----------------------|------------------|---------------------|----------------|---------------|
| ① 3/4" extension - 150 mm | 150 | 1 | 1 | 4932471655 | 4058546295547 |
| ② 3/4" extension - 250 mm | 250 | 1 | 1 | 4932471656 | 4058546295554 |



3/4" impact sockets - adaptors

NEW

Square drive adaptor according to DIN 3121 / ISO 1174 with ball lock.

3/4" adapter and reducer (F) to accept different square drive sizes (M), making an existing socket system more flexible in use. SHOCKWAVE™ IMPACT DUTY steel (chrome-molybdenum) is high quality alloy steel which provides ultimate strength and durability.

| Description | Total length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------------------|----------------------|------------------|---------------------|----------------|---------------|
| ket adaptor: 3/4" square - square | 56 | 1 | 1 | 4932471657 | 4058546295561 |
| ket adaptor: 3/4" square - quare | 63 | 1 | 1 | 4932471658 | 4058546295578 |



3/4" impact sockets - security accessories

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| ① 3/4" 0-ring for sockets 17-49 mm | 1 | 1 | 4932471659 | 4058546295585 |
| ① 3/4" 0-ring for sockets 50-70 mm | 1 | 1 | 4932471660 | 4058546295592 |
| ② 3/4" connection pin for sockets 17-49 mm | 1 | 1 | 4932471661 | 4058546295608 |
| ② 3/4" connection pin for sockets 50-70 mm | 1 | 1 | 4932471662 | 4058546295615 |









1" SHOCKWAVE™ IMPACT DUTY impact sockets

NEW


SHOCKWAVE™ IMPACT DUTY steel (Chrome-Molybdenum) is high quality alloy steel which provides ultimate strength and durability. According to DIN 3129 / ISO 2725-2, internal square drive according to DIN 3121 / ISO 1174-2.

6 gripping points for best precise fit.

Recessed corners allow torque to be transferred across the flats of the socket rather than producing stress on the points or corners. Laser etched size markings for easy identification and won't wear off.

| A (mm) | B (mm) | C (mm) | D (mm) | E | For anchor thread size | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------|-----------|-----------|-----------|----|------------------------------|------------------|---------------------------|-------------------|---------------|
| 1" square | 27 | 58 | 14 | 46 | M18 | 1 | 1 | 4932471663 | 4058546295622 |
| 1" square | 30 | 60 | 16 | 49 | M20 | 1 | 1 | 4932471664 | 4058546295639 |
| 1" square | 32 | 61 | 19 | 53 | M22 | 1 | 1 | 4932471665 | 4058546295646 |
| 1" square | 33 | 61 | 19 | 54 | - | 1 | 1 | 4932471666 | 4058546295653 |
| 1" square | 36 | 65 | 19 | 57 | M24 | 1 | 1 | 4932471667 | 4058546295660 |
| 1" square | 41 | 65 | 23 | 63 | M27 | 1 | 1 | 4932471668 | 4058546295677 |
| 1" square | 46 | 74 | 23 | 69 | M30 | 1 | 1 | 4932471669 | 4058546295684 |
| 1" square | 50 | 74 | 26 | 74 | M33 | 1 | 1 | 4932471670 | 4058546295691 |
| 1" square | 55 | 85 | 28 | 81 | M36 | 1 | 1 | 4932471671 | 4058546295707 |
| 1" square | 60 | 89 | 31 | 87 | M39 | 1 | 1 | 4932471672 | 4058546295714 |
| 1" square | 65 | 93 | 32 | 93 | M42 | 1 | 1 | 4932471673 | 4058546295721 |
| 1" square | 70 | 98 | 35 | 99 | M45 | 1 | 1 | 4932471674 | 4058546295738 |







1" impact sockets - extensions

NEW

Impact rated socket extensions for facilitated bolt access in restricted areas.

SHOCKWAVE™ IMPACT DUTY steel (chrome-molybdenum) is high quality alloy steel which provides ultimate strength and durability.

| Description | Total length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------|----------------------|------------------|---------------------|----------------|---------------|
| 1" extension - 175 mm | 175 | 1 | 1 | 4932471675 | 4058546295745 |
| 2 1" extension - 300 mm | 300 | 1 | 1 | 4932471676 | 4058546295752 |



1" impact sockets - adaptors

NEW

Square drive adaptor according to DIN 3121 / ISO 1174 with ball lock.

1" reducer (F) to accept different square drive sizes (M), making an existing socket system more flexible in use.

 $SHOCKWAVE^{\tiny{\text{TM}}}\ IMPACT\ DUTY\ steel\ (chrome-molybdenum)\ is\ high\ quality\ alloy\ steel\ which\ provides\ ultimate\ strength\ and\ durability.$

| Description | Total length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|----------------------|---------------|---------------------|----------------|---------------|
| Socket adaptor: 1" square - 3/4" square | 75 | 1 | 1 | 4932471677 | 4058546295769 |



1" impact sockets - security accessories

NEW

Pin and o-ring accessories to secure 1" impact sockets safely.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------|------------------|---------------------|----------------|---------------|
| ① 1" 0-ring | 1 | 1 | 4932471678 | 4058546295776 |
| ② 1" connection pin | 1 | 1 | 4932471679 | 4058546295783 |





Nails and Staples

| | Туре | Wire gauge | Dimensions (mm) | Total length (mm) | Nail angle | Material | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|------------|--------------|------------|--------------------|----------------------|------------|-----------------------------|------------------|---------------------|----------------|---------------|--|
| | | 18 | 1,0 x 1,25 | 16 | 0° | Resin Coated. Galvanised | 10,000 | 1 | 4932459124 | 4002395287796 | |
| | | 18 | 1,0 x 1,25 | 19 | 0° | Resin Coated. Galvanised | 10,000 | 1 | 4932459125 | 4002395288403 | |
| | | 18 | 1,0 x 1,25 | 25 | 0° | Resin Coated. Galvanised | 5,000 | 1 | 4932459126 | 4002395288410 | |
| | | 18 | 1,0 x 1,25 | 30 | 0° | Resin Coated. Galvanised | 5,000 | 1 | 4932459127 | 4002395288427 | |
| | | 18 | 1,0 x 1,25 | 32 | 0° | Resin Coated. Galvanised | 5,000 | 1 | 4932459128 | 4002395288434 | |
| | | 18 | 1,0 x 1,25 | 40 | 0° | Resin Coated. Galvanised | 5,000 | 1 | 4932459129 | 4002395288441 | |
| | | 18 | 1,0 x 1,25 | 45 | 0° | Resin Coated. Galvanised | 4,000 | 1 | 4932459130 | 4002395288458 | |
| (1) | Brad nails | 18 | 1,0 x 1,25 | 50 | 0° | Resin Coated. Galvanised | 4,000 | 1 | 4932459131 | 4002395288465 | |
| () | bi au iialis | 18 | 1,0 x 1,25 | 16 | 0° | Stainless / Rust free | 10,000 | 1 | 4932459132 | 4002395288472 | |
| | | 18 | 1,0 x 1,25 | 19 | 0° | Stainless / Rust free | 10,000 | 1 | 4932459133 | 4002395288489 | |
| | | 18 | 1,0 x 1,25 | 25 | 0° | Stainless / Rust free | 5,000 | 1 | 4932459134 | 4002395288496 | |
| | | 18 | 1,0 x 1,25 | 30 | 0° | Stainless / Rust free | 5,000 | 1 | 4932459135 | 4002395289103 | |
| | | 18 | 1,0 x 1,25 | 32 | 0° | Stainless / Rust free | 5,000 | 1 | 4932459136 | 4002395289110 | |
| | | 18 | 1,0 x 1,25 | 40 | 0° | Stainless / Rust free | 5,000 | 1 | 4932459137 | 4002395289127 | |
| | | 18 | 1,0 x 1,25 | 45 | 0° | Stainless / Rust free | 4,000 | 1 | 4932459138 | 4002395289134 | |
| | | 18 | 1,0 x 1,25 | 50 | 0° | Stainless / Rust free | 4,000 | 1 | 4932459139 | 4002395289141 | |
| | | 16 | 1.36 x 1.65 | 32 | 20° | Galvanised | 2,000 | 1 | 4932459140 | 4002395289158 | |
| | | 16 | 1.36 x 1.65 | 38 | 20° | Galvanised | 2,000 | 1 | 4932459141 | 4002395289165 | |
| 2 | Brad nails | 16 | 1.36 x 1.65 | 45 | 20° | Galvanised | 2,000 | 1 | 4932459142 | 4002395289172 | |
| | | 16 | 1.36 x 1.65 | 50 | 20° | Galvanised | 2,000 | 1 | 4932459143 | 4002395289189 | |
| | | 16 | 1.36 x 1.65 | 64 | 20° | Galvanised | 2,000 | 1 | 4932459144 | 4002395289196 | |
| | | Type 50 | 0,5 x 1,27 | 6 | | Galvanised | 1,200 | 1 | 4932459145 | 4002395289806 | |
| 3 | Staples | Type 50 | 0,5 x 1,27 | 8 | | Galvanised | 1,200 | 1 | 4932459146 | 4002395289813 | |
| | | Type 50 | 0,5 x 1,27 | 14 | | Galvanised | 600 | 1 | 4932459147 | 4002395289820 | |
| | | | | | | | | | | | |














SAWZALL[®] BLADE SELECTION GUIDE

- Identify the material to be cut in the columns above.
- Follow the row across to find best/compatible performing blade.

BEST PERFORMANCE GOOD PERFORMANCE



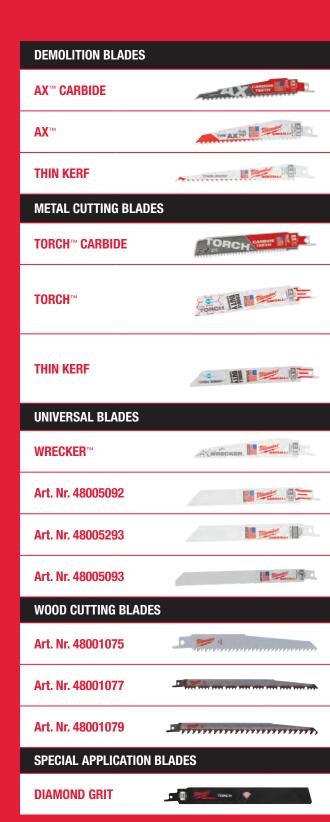

| | | 0 | | 0 | 0 | | | | | | | 9 |
|-------|-------------------------|----------------------|---------------------------|-------------------------|--------------------|------|----------------------------------|------|------------|-----------------------------|---------|----------|
| | (W | | - | | | | | | | | | Ü |
| | BLADE Thickness (MM) | ETAL | MEDIUM METAL 1.5 - 4MM | TAL IM | SS | | NON FERROUS METALS (CU/AL) | | MOOD | WOOD WITH Nails & Screws | | ω. |
| ТРІ | BLADE Thickni | THICK METAL > 4MM | IEDIUN 5 - 4M | THIN METAL 0.5 - 3MM | STAINLESS STEEL | CAST | ON FEF AETALS (U/AL) | WOOD | GREEN WOOD | WOOD WITH Nails & Scr | PALLETS | PVC Pipe |
| F | 8 F | F ^ | ⊻ + | F 0 | လ လ | ა ≝ | 2 = 9 | 8 | 5 | S Z | Ы | <u> </u> |
| | | | | | | | | | | | | |
| 5 | 1.27 | | | | | | | | | | | |
| 5 | 1.60 | | | | | | | | | | | |
| 5 | 1.27 | | | | | | | | | | | |
| | | | | | | | | | | | | |
| 7 | 1.27 | | | | | | | | | | | |
| 10 | 1.10 | Faster/ Rougher | Faster/ Rougher | | | | | | | | | |
| 14 | 1.10 | tiougner | Slower/ | | | | | | | | | |
| 18 | 1.10 | Slower/ Smoother | Slower/ Smoother | | | | | | | | | |
| 14 | 0.90 | Faster/ Rougher | Faster/ Rougher | | | | | | | | | |
| 18 | 0.90 | † | ‡ | | | | | | | | | |
| 25 | 0.90 | Slower/ Smoother | Slower/ Smoother | | | | | | | | | |
| | | | | | | | | | | | | |
| 7/11 | 1.60 | | | | | | | | | | | |
| 10 | 0.90 | | | | | | | | | | | |
| 10/14 | 0.90 | | | | | | | | | | | |
| 8/12 | 1.27 | | | | | | | | | | | |
| | | | | | | | | | | | | |
| 4.2 | 1.27 | | | | | | | | | | | |
| 5.5/6 | 1.27 | | | | | | | | | | | |
| 8.5 | 1.27 | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | 1.10 | | | | | | | | | | | |



CARBIDE


WORK FASTER FOR LONGER

We are committed to providing all our users with power tool accessory solutions that save time and increase productivity on the jobsite.

Through our investment in carbide technology, Milwaukee Tool continues to lead and drive innovation in the linear edge category by delivering the longestlasting, most versatile, and fastest-cutting tool accessories available.


x50 **LONGER LIFE**

Carbide technology delivers up to 50X life over bi-metal standard blades

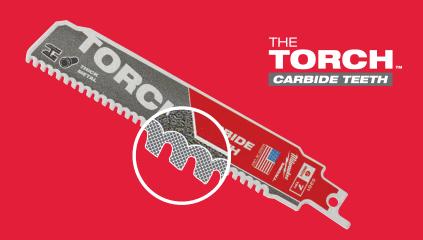

1000 **MORE CUTS**

Carbide Teeth are optimized for Cordless Recip Saws delivering over 25% more cuts per charge

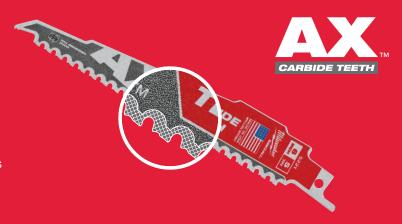

CUTS OVER
7 CARS Go online to see our video - youtube com/milway/seet




Metal: Heavy duty TORCH™ carbide teeth demolition blades

Carbide teeth provide for longest life in thick metals. Up to 50x more life compared to Bi-Metal blades. Thick 1.27 mm robust blade body for precise straight cuts.


25 mm blade height for improved stability and minimum vibration.



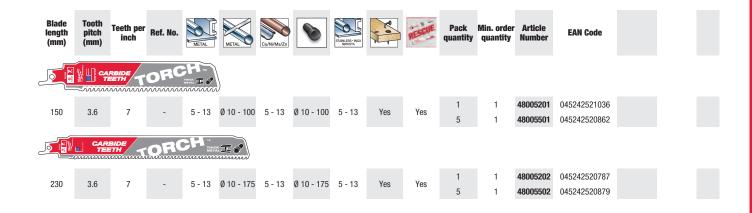

Wood with nails: Heavy duty AX™ carbide teeth demolition blades





Up to 50x longer life than standard Bi Metal blades. Carbide teeth deliver long life and extreme durability in the toughest applications. Cuts through harderned screws and fastners.


Up to 2x faster than standard Bi Metal blades. A fast and aggressive 5 Tpi tooth pattern allows for the fastest cutting in nail embedded wood and a wide range of construction materials (wood/nails/bolts/screws/cast iron/asphalt roofing felt shingles).

Up to 25% more cuts per charge vs. standard Bi Metal blades. Optimised for use with cordless reciprocating saws.

FANG $\mathsf{TIP}^{\scriptscriptstyle\mathsf{TM}}\!:$ For faster plunge cutting and reaching into restricted areas.

NAIL GUARD™: Protects the tooth during nail impacts for increased durability and lifetime.

Sloped shape: Excellent for plunge cutting and reaching into restricted areas.

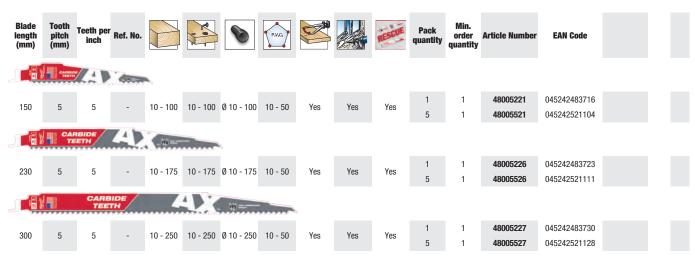





Wood with nails: Heavy duty AX™ demolition blades

THE AX

FANG TIP™: For faster plunge cutting and reaching into restricted areas.

 ${\sf NAIL\ GUARD}^{\scriptscriptstyle{\text{TM}}}\hbox{: Protects\ the\ tooth\ during\ nail\ impacts\ for\ increased\ durability\ and\ lifetime.}$

Strong: Extra thick 1.60 mm body for maximum robustness and life making it ideal for wood with nails or bolts.

Fast: Aggressive 5 Tpi tooth geometry removes more material per stroke for faster cutting.

Sloped shape: Excellent for plunge cutting and reaching into restricted areas.

Shatter resistant: Bi-Metal construction allows the blade to bend and flex without breaking.





| Blade length (mm) | Tooth pitch (mm) | Teeth per inch | Ref. No. | | | • | P,V,C, | | | RESCUE | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-------------------------|------------------------|-------------------|---------------|-----------|---------------------------------------|------------|---------|-----|-----|--------|------------------|---------------------------|----------------|--------------|--|
| 011 | Milmader Bangale | THE AX | an annual and | \ | | | | | | | | | | | |
| 150 | _ | _ | | 10 100 | 10 100 | Ø 10 100 | 10 50 | Yes | Vee | Vaa | 5 | 1 | 48005021 | 045242082988 | |
| 150 | 5 | 5 | - | 10 - 100 | 10 - 100 | Ø 10 - 100 | 10 - 50 | Yes | Yes | Yes | 25 | 1 | 48008021 | 045242082285 | |
| 0 1 | Milwauker | | n | mAX [4] | · · · · · · · · · · · · · · · · · · · | ۵ | | | | | | | | | |
| 230 | 5 | 5 | | 10 - 175 | 10 175 | Ø 10 - 175 | 10 - 50 | Yes | Yes | Yes | 5 | 1 | 48005026 | 045242082995 | |
| 230 | 3 | 3 | - | 10 - 175 | 10 - 175 | 0 10 - 175 | 10 - 30 | 169 | 162 | 162 | 25 | 1 | 48008026 | 045242082292 | |
| 0 | Milwanker | | cararara | anananana | па ДХ | | | | | | | | | | |
| 300 | 5 | 5 | _ | 10 - 250 | 10 250 | Ø 10 - 250 | 10 - 50 | Yes | Yes | Yes | 5 | 1 | 48005027 | 045242083022 | |
| 300 | 3 | 3 | | 10 - 230 | 10 - 230 | 10 - 250 | 10 - 50 | 168 | 162 | 162 | 25 | 1 | 48008027 | 045242082308 | |

Wood with nails: THIN KERF demolition blades

FANG $\mathsf{TIP}^{\scriptscriptstyle\mathsf{TI}}\!:$ For faster plunge cutting and reaching into restricted areas.

NAIL GUARD™: Protects the tooth during nail impacts for increased durability and lifetime.

Strong: 1.25 mm thick blade body for good strength and blade life making it ideal for wood with nails or bolts.

Fast: Aggressive 5 TPi geometry removes more material per stroke for faster cutting.

Sloped shape: Excellent for plunge cutting and reaching into restricted areas.

Shatter resistant: Bi-Metal construction allows the blade to bend and flex without breaking.





| Blade length (mm) | Tooth pitch (mm) | Teeth per inch | Ref. No. | | | P.V.C. | P.V.C. | | | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-------------------------|--|-------------------------------|----------------------------------|-------------------------|---|------------|--|-----|-----|------------------|---------------------------|----------------|--------------|--|
| Jo III | This makes | THUM | Madadadadadadad | | | | | | | | | | | |
| 150 | 5 | 5 | S611DF | 10 - 100 | 10 - 100 | Ø 10 - 100 | 10 - 50 | Yes | Yes | 5 | 1 | 48005035 | 045242082698 | |
| 150 | 5 | 5 | - | 10 - 100 | 10 - 100 | Ø 10 - 100 | 10 - 50 | Yes | Yes | 50 | 1 | 48016035 | 045242084791 | |
| Joil | Milumites Mayrace Milumites | n lan lan lan lan lan lan lan | an landar landar landar landar l | THIN KI | ERF SISISISISISISISISISISISISISISISISISISI | > | | | | | | | | |
| 230 | 5 | 5 | S1111DF | 10 - 175 | 10 - 175 | Ø 10 - 175 | 10 - 50 | Yes | Yes | 5 | 1 | 48005036 | 045242082704 | |
| 230 | 5 | 5 | - | 10 - 175 | 10 - 175 | Ø 10 - 175 | 10 - 50 | Yes | Yes | 50 | 1 | 48016036 | 045242084661 | |
| Ja III | Milionakis Bawrate nunununununununun | | lededededededed | العالمالم العالمالمالما | edededededede | THIM KEI | The second of th | | | | | | | |
| 300 | 5 | 5 | S1411DF | 10 - 250 | 10 - 250 | Ø 10 - 250 | 10 - 50 | No | Yes | 5 | 1 | 48005037 | 045242082711 | |
| 300 | 5 | 5 | - | 10 - 250 | 10 - 250 | Ø 10-250 | 10 - 50 | Yes | Yes | 50 | 1 | 48016037 | 045242084807 | |

Multi material: Extra heavy duty WRECKER™ blades


WRECKER_{TM}

Strong and precise: Extra thick 1.60 mm blade body.

Bi-Metal construction: Excellent blade life and performance.

Tooth geometry: Aggressive strengthened tooth tip design and uniform gullet depth allows for more material to be removed per stroke for faster cutting.

Blade shape: Sloped - The sloped shape makes this blade ideal for plunge cutting. Most suited for cutting metal and for demolition applications (wood with nails).

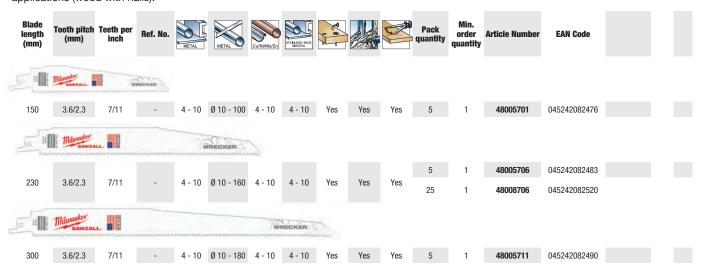

Wood / Metal / Plastic: Universal blades

| Blade length | Tooth pitch | Teeth per | Ref. No. | | | | | | | | P.V.C. | Pack | Min. order | Article Number | EAN Code | |
|-----------------|----------------|--------------|-------------|--------|-------------|---------|--------|---------|-----|-----------|-------------|----------|---------------|----------------------|------------------------------|--|
| (mm) | (mm) | inch | nei. No. | METAL | Cu/Ni/Ms/Zn | | ALU | | | P.V.C. | P.V.C. | quantity | quantity | Article Nulliber | EAN COUC | |
| | Milwank | ot VZALLO | | | | | | | | | | | | | | |
| ے ا | | VZALLO H | ~~~~~ | | | | | | | | | | | | | |
| 150 | 2.5 | 10 | - | 3 - 10 | 3 - 10 | 5 - 50 | 3 - 10 | 5 - 50 | No | Ø 3 - 50 | 10 - 50 | 5 | 1 | 48005092 | 045242082766 | |
| | | | | | | | | | | | | | | | | |
| <u> </u> | | | | | | | | | | | | | | | | |
| 150 | 2.5/1.8 | 10/14 | SS922VF | 3 - 10 | 3 - 10 | 5 - 100 | 3 - 10 | 5 - 100 | No | Ø 3 - 100 | 10 - 50 | 5 50 | 1 | 48005292 48016292 | 045242084067 045242084081 | |
| | E to Artsmouth | ee° HIII | | | | \ | | | | | | 30 | • | 40010232 | 043242004001 | |
| _امرا | Milwauk Saw | ZALLO | ······ | | | | | | | | | | | | | |
| 200 | 2.5/1.8 | 10/14 | | 3 - 10 | 3 - 10 | 5 - 175 | 3 - 10 | 5 - 175 | Yes | Ø 3 - 160 | 10 - 50 | 5 | 1 | 48005293 | 045242084074 | |
| 200 | 2.5/1.0 | 10/14 | | | | | | | | | | 50 | 1 | 48016293 | 045242084098 | |
| THIN KERF | | | | | | | | | | | | | | | | |
| 300 | 2.5/1.8 | 10/14 | _ | 3 - 10 | 3 - 10 | 5 - 250 | 3 - 10 | 5 - 250 | Yes | Ø 3 - 250 | 10 - 50 | 5 | 1 | 48005194 | 045242082926 | |
| | | | | | 0 10 | 0 200 | 0 10 | 0 200 | 100 | p 0 200 | 10 00 | U | • | 4000104 | 040242002020 | |
| المحال | Milwauker | ALL: | THIP | N KERF | | | | | | | | | | | | |
| 150 | 3.2/2.1 | 8/12 | | 3 - 10 | 3 - 10 | 5 - 100 | 3 - 10 | 5 - 100 | No | Ø 3 - 100 | 10 - 50 | 5 | 1 | 48005091 | 045242082759 | |
| 130 | 5.2/2.1 | 0/12 | | 3 - 10 | 3 - 10 | 3 - 100 | 3 - 10 | 3 - 100 | NO | Ø 3 - 100 | 100 10 - 30 | 50 | 1 | 48016091 | 045242084685 | |
| | Milwauke | EALLO S | | | | | | | | | | | | | | |
| - 1 | | ········ | *********** | | *********** | ~~· | | | | | | 5 | 1 | 48005093 | 045242082773 | |
| 200 | 3.2/2.1 | 8/12 | - | 3 - 10 | 3 - 10 | 5 - 175 | 3 - 10 | 5 - 175 | Yes | Ø 3 - 160 | 10 - 50 | 50 | 1 | 48016093 | 045242084708 | |
| | | | | | | | | | | | | 500 | 1 | 48016000 | 045242084951 | |
| THIN KERF | | | | | | | | | | | | | | | | |
| | - SAWZ | | | | | | | | | | | - | | 40005006 | 0.450.40000700 | |
| 300 | 3.2/2.1 | 8/12 | - | 3 - 10 | 3 - 10 | 5 - 250 | 3 - 10 | 5 - 250 | Yes | Ø 3 - 250 | 10 - 50 | 5 50 | 1 | 48005094 48016094 | 045242082780 045242084715 | |
| | | | | | | | | | | | | 00 | • | 1001000-1 | 3.32-1200-1710 | |



Metal: Heavy duty TORCH™ demolition blades





Improved tooth geometry for best speed and double the lifetime.

Thick 1.06 mm robust blade body for precise cuts.

25 mm blade height for improved stability and minimum vibration.

Bi-Metal quality cutting teeth with 8 % cobalt the ultimate in performance and lifetime.



Stamped indentations around the reception strengthens the blade at its weakest point.



A grid iron pattern is built into the blade to make it more rigid with less tendency to bend or buckle for best durability and straight cuts.



Unique cyrogenic heat treatment process gives:

- tougher teeth for cutting the hardest of metals
- up to 50% longer life vs. standard Bi Metal blades



*vs. standard Bi Metal blades

Metal: Heavy duty TORCH™ demolition blades

| Blade length (mm) | Tooth pitch (mm) | Teeth per inch | Ref. No. | METAL | METAL | Cu/Ni/Ms/Zn | STAINLESS - NOX NPOSTA | | RESCUE | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-------------------------|------------------------|--|--|--|---------------|--------------------|---------------------------|-----|--------|------------------|---------------------------|----------------------|------------------------------|--|
| | Milwanker | A A A A A A A A A A A A A A A A A A A | TORCH | | | | | | | | | | | |
| 150 | 1.4 | 18 | - | 2 - 8 | Ø 10 - 100 | 2 - 8 | 2 - 4 | No | Yes | 5 25 | 1 1 | 48005784 48008784 | 045242083084 045242082407 | |
| | Milwanker | 調調 | TORCH | m ice | ardened | | | | | | | | | |
| 150 | 1.4 | 18 | - | 2 - 8 | Ø 10 - 100 | 2 - 8 | 2 - 4 | No | Yes | 5 | 1 | 48004784 | 045242081110 | |
| | Milwanker | | ********* | ·········· | тоясн | | | | | | | | | |
| 230 | 1.4 | 18 | - | 2 - 8 | Ø 10 - 160 | 2 - 8 | 2 - 4 | No | Yes | 5 25 | 1 1 | 48005788 48008788 | 045242083091 045242082421 | |
| | Milwanker | 計劃 | | vmmmm | TORCH | ice har | rdened | | | | | | | |
| 230 | 1.4 | 18 | - | 2 - 8 | Ø 10 - 160 | 2 - 8 | 2 - 4 | No | Yes | 5 | 1 | 48004788 | 045242081134 | |
| | Milwankes | ## HE | | ······································ | vvvvvvvvvvv | ······ | рясн | | | | | | | |
| 300 | 1.4 | 18 | - | 2 - 8 | Ø 10 - 180 | 2 - 8 | 2 - 4 | No | Yes | 5 25 | 1 | 48005789 48008789 | 045242083107 045242082438 | |
| | Milwaukee | 調調 | TORCH | | | | | | | | | | | |
| 150 | 1.8 | 14 | - | 3 - 10 | Ø 10 - 100 | 3 - 10 | 3 - 7 | Yes | Yes | 5 25 | 1 | 48005782 48008782 | 045242083060 045242082391 | |
| | Milwanker | DOUBLE BOUNELE | тоясн | ice _h | ardened | | | | | | | | | |
| 150 | 1.8 | 14 | - | 3 - 10 | Ø 10 - 100 | 3 - 10 | 3 - 7 | Yes | Yes | 5 | 1 | 48004782 | 045242081097 | |
| | Milwukes | The state of the s | Control of the contro | ynyy y y y y y y y y y y y y y y y y y | ТОЯСН | | | | | | | | | |
| 230 | 1.8 | 14 | - | 3 - 10 | Ø 10 - 160 | 3 - 10 | 3 - 7 | Yes | Yes | 5 25 | 1 1 | 48005787 48008787 | 045242083077 045242082414 | |
| | Milwanker | | | | TORCH | ice _{har} | rdened | | | | | | | |
| 230 | 1.8 | 14 | - | 3 - 10 | Ø 10 - 160 | 3 - 10 | 3 - 7 | Yes | Yes | 5 | 1 | 48004787 | 045242081127 | |
| | Milwanker | 調調 | тоясн | | | | | | | | | | | |
| 150 | 2.5 | 10 | - | 4 - 10 | Ø 10 - 100 | 4 - 10 | 4 - 10 | Yes | Yes | 5 25 | 1 1 | 48005712 48008712 | 045242083039 045242082377 | |
| | Milwantes | | TORCH | m ice | ardened | | | | | | | | | |
| 150 | 2.5 | 10 | - | 4 - 10 | Ø 10 - 100 | 4 - 10 | 4 - 10 | Yes | Yes | 5 | 1 | 48004712 | 045242081073 | |
| | Milwanker | | | ······································ | ТОЯСН | | | | | | | | | |
| 230 | 2.5 | 10 | - | 4 - 10 | Ø 10 - 160 | 4 - 10 | 4 - 10 | Yes | Yes | 5 25 | 1 | 48005713 48008713 | 045242083046 045242082384 | |
| | Milwanker | | | | TORCH | ice _{han} | dened | | | | | | | |
| 230 | 2.5 | 10 | - | 4 - 10 | Ø 10 - 160 | 4 - 10 | 4 - 10 | Yes | Yes | 5 | 1 | 48004713 | 045242081080 | |
| 200 | ۷.3 | 10 | = | 7 - 10 | ייי פייי פייי | 7 10 | ∓ - IU | 169 | 169 | 50 | 1 | 48018713 | 045242253555 | |



Metal: THIN KERF blades





Improved tooth geometry for best speed and double the lifetime. Bi-Metal quality cutting teeth with 8% Cobalt the ultimate in performance and lifetime.



Stamped indentations around the reception strengthens the blade at its weakest point.

THIN KERF

Slim 0.90 mm thick blade body optimised for maximum speed and flexibility.



Unique cyrogenic heat treatment process gives:

- tougher teeth for cutting the hardest of metals
- up to 50% longer life vs. standard Bi Metal blades



*vs. standard Bi Metal blades

Metal: THIN KERF blades

| Blade length (mm) | Tooth pitch (mm) | Teeth per inch | Ref. No. | METAL | METAL | METAL | Cu/Ni/Ms/Zn | STARLESS - NOX NROSTA | ALU | No. of the last of | | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-------------------------|---|-------------------|---------------------------------------|---------|-------------------------|------------|-------------------|--------------------------|---------|--|-----|------------------|---------------------------|----------------------|------------------------------|--|
| | × II | 5 | | | | | | | | | | | | | | |
| 100 | 1 | 24 | S522AF | 0.5 - 3 | 0.5 - 3 | Ø 8 - 50 | 0.5 - 3 | 0.5 - 3 | - | No | No | 5 | 1 | 48005185 | 045242082865 | |
| | Milwanker | 調調 | THIN KER | | | | | | | | | | | | | |
| 150 | 1 | 24 | S922AF | 0.5 - 3 | 0.5 - 3 | Ø8-100 | 0.5 - 3 | 0.5 - 3 | - | No | No | 5 | 1 | 48005186 | 045242082872 | |
| | | 5 | | | | | | | | | | | | | | |
| 100 | 1.4 | 18 | S522EF | 1.5 - 4 | 1.5 - 4 | Ø 10 - 50 | 1.5 - 4 | 1.5 - 4 | - | No | No | 5 | 1 | 48005183 | 045242082841 | |
| | Milwankes | 計劃 | THE NAME | | | | | | | | | | | | | |
| 150 | 1.4 | 18 | S922EF | 1.5 - 4 | 1.5 - 4 | Ø 10 - 100 | 1.5 - 4 | 1.5 - 4 | - | No | No | 5 50 | 1 1 | 48005184 48016184 | 045242082858 045242084739 | |
| 0 | Milwanker | - All | THIM ICES | | i ce _{hard} | ened | | | | | | | | | | |
| 150 | 1.4 | 18 | ~~~~~ | ~~) | | Ø 10 - 100 | 1.5 - 4 | 1.5 - 4 | - | No | No | 5 | 1 | 48004184 | 045242081042 | |
| | Milwanker | | | | 71404 | Hirter | | | | | | | | | | |
| 220 | 1.4 | ~~~~ | C1122EE | 15 4 | | ****** | 15 4 | 1 5 4 | | No | No | 5 | 1 | 48005188 | 045242082896 | |
| 230 | 1.4 | 18 | S1122EF | 1.5 - 4 | 1.5 - 4 | Ø 10 - 100 | 1.5 - 4 | 1.5 - 4 | - | No | No | 50 | 1 | 48016188 | 045242084876 | |
| | Milesanker | 調調 | · · · · · · · · · · · · · · · · · · · | ····· | 714114 | MORE | ice | ardened | | | | | | | | |
| 230 | 1.4 | 18 | S1122EF | 1.5 - 4 | 1.5 - 4 | Ø 10 - 160 | 1.5 - 4 | 1.5 - 4 | - | No | No | 5 | 1 | 48004188 | 045242081066 | |
| | THILINGUAL SAME ALL | 調調 | ······ | ····· | | ······ | THIM | | | | | | | | | |
| 300 | 1.4 | 18 | - | 1.5 - 4 | 1.5 - 4 | Ø 10 - 180 | 1.5 - 4 | 1.5 - 4 | - | No | Yes | 5 50 | 1 1 | 48005189 48016189 | 045242082902 045242084883 | |
| 50 | 三層面 | | | | | | | | | | | | | | | |
| 90 | 1.8 | 14 | S422BF | 1.5 - 6 | 1.5 - 6 | - | 1.5 - 4 | - | 1.5 - 6 | Yes | No | 5 | 1 | 48005162 | 045242082803 | |
| | × 11 | 5 | | | | | | | | | | | | | | |
| 100 | 1.8 | 14 | S522BF | 3 - 10 | - | Ø 10 - 50 | 3 - 10 | 2 - 4 | 3 - 10 | No | No | 5 | 1 | 48005181 | 045242082827 | |
| Jo | Milmanker | 調調 | THIN KER | | | | | | | | | | | | | |
| 150 | 1.8 | 14 | S922BF | 3 - 10 | - | Ø 10 - 100 | 3 - 10 | 2 - 4 | 3 - 10 | No | No | 5 | 1 | 48005182 | 045242082834 | |
| | Milwanker | 書 | THIN KER | • | ce _{hard} | med | | | | | | 50 | 1 | 48016182 | 045242084722 | |
| 150 | 1.8 | 14 | | 3 - 10 | | Ø 10 - 100 | 3 - 10 | 2 - 1 | 3 - 10 | No | No | 5 | 1 | 48004182 | 045242081035 | |
| | | 調調 | COLLON | 0 10 | | | 5 10 | _ 4 | 0 10 | 140 | 110 | 3 | | 10001102 | 3-10L-T2001000 | |
| mm | *************************************** | | | | ~~~~~~~ | | | | | | | 5 | 1 | 48005187 | 045242082889 | |
| 230 | 1.8 | 14 | S1122BF | 3 - 10 | - | Ø 10 - 160 | 3 - 10 | 2 - 4 | 3 - 10 | No | No | 50 | 1 | 48016187 | 045242084869 | |
| | Milanankee | 書 | ····· | | THIN | m m | ice _{ha} | ardened | | | | | | | | |
| 230 | 1.8 | 14 | S1122BF | 3 - 10 | - | Ø 10 - 160 | 3 - 10 | 2 - 4 | 3 - 10 | No | No | 5 | 1 | 48004187 | 045242080991 | |

Wood and plastics

| | Blade length (mm) | Tooth pitch (mm) | Teeth per inch | Ref. No. | | | P.V.C. | | | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----|----------------------|---|-------------------|--|---------------------------------------|----------|---------|-----|-----|------------------|---------------------------|-------------------|---------------|--|
| | | | | | | | | | | | | | | |
| | nnm | mmmm | mmmm | no | | | | | | | | | | |
| | 150 | 4.2 | 6 | S644D | 6 - 100 | - | 6 - 100 | No | Yes | 3 | 1 | 48001075 | 045242079810 | |
| | Johnson | | | m | | | | | | | | | | |
| | 150 | 4.2 | 6 | S744D | 6-50 | - | 6-50 | Yes | No | 3 | 1 | 48001076 | 045242079827 | |
| | O E | | rennanna | mmmm | > | | | | | | | | | |
| | 230 | 4.2 | 6 | - | 6 - 190 | 6 - 190 | 6 - 100 | No | Yes | 5 | 1 | 48005016 | 045242082636 | |
| | - WWV | · ************************************ | www.v | volvol) | www | | | | | | | | | |
| | 240 | 5.5/6 | 4/5 | S1531L | 15 - 190 | 15 - 190 | - | No | No | 3 | 1 | 48001077 | 045242079834 | |
| | - www | עעעעע | ועעעע | עעעע | ועעער | m | | | | | | | | |
| | 240 | 8.5 | 3 | S1542K | 15 - 190 | - | - | No | No | 3 | 1 | 48001078 | 045242079841 | |
| NEW | | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | ····· | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | , , , , , , , , , , , , , , , , , , , | | | | | | | | | |
| 2 | 275 | 4.2 | 6 | - | 6 - 200 | 6 - 200 | - | No | No | 2 | 1 | 4932471693 | 4058546295929 | |
| | Jo mm | mmm | mmm | mmm | mmm | mmm | mmm | | | | | | | |
| | 300 | 4.2 | 6 | S1344D | 6 - 250 | - | - | No | No | 3 | 1 | 48001079 | 045242079858 | |

SAWZALL™ blades for special materials

Special application: Ductwork blade

Plunge tip - fast plunging in materials < 0.6 mm. No need for extra tools.

Versatility - tapered blade body profile allows for tight radius cutting and square cuts.

Longlife - optimized tooth geometry 30 tpi for cutting thin material 0.6 - 1.5 mm. Most common spiral duct is 0.8 mm thick.



| Blade length (mm) | Tooth pitch (mm) | Teeth per inch | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------|------------------|----------------|------------------|------------------------|----------------|--------------|
| 85 | 0.8 | 30 | 5 | 1 | 48001630 | 045242300174 |

Special application: Drywall / plasterboard blade



Precise depth of cut - only 63 mm long, protects from unintentional cuts in pipes or wiring.

Double sided teeth - cuts in ALL directions - produces less dust than jobsaw handtool - cuts clean without ripping the drywall.

Plunge tip - fast and effortless plunging.


| Blade length (mm) | Tooth pitch (mm) | Teeth per inch | | | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|----------------------|---------------------|-------------------|------|-----|------------------|---------------------|----------------|--------------|--|
| 63 | - | - | Yes | Yes | 1 | 1 | 48001640 | 045242300181 | |
| | ····· | ······ | ·/// | | | | | | |
| 125 | 4.2 | 6 | Yes | Yes | 5 | 1 | 48005052 | 045242082735 | |

Special application: Cast iron / abrasive materials / fibreglass Blade length Tooth pitch Teeth per Article Ref. No. **EAN Code** inch quantity quantity Number Ø 10 - 160 Ø 10 - 160 3 - 175 Coarse grit **48001450** 045242187416 230 150 Ø 10 - 100 Ø 10 - 100 3 - 100 **48001420** 045242081950 Coarse grit S1130R Ø 10 - 160 Ø 10 - 160 3 - 175 **48001430** 045242082001 230 Coarse grit S1241HM 6 - 150 10 - 250 **48001080** 045242079865 - 6 - 150 10 - 350 10 - 350 Special application: Insulation material / carton / foam

Special application: Frozen materials

Wave knife

Ref. No.



Yes

Yes

Pack

order

Article Number

EAN Code

48001084 045242079902

Special Application: Flush cut blade



Blade length

ەك_

Tooth pitch

Wave knife





Flush cuts against floor - floor guard protects teeth from floor contact when cutting flush to the floor.

Extra tall blade body - guides blade for straighter cuts ie. when cutting out doors and windows in wood construction.

FANG $\mathsf{TIP}^{\scriptscriptstyle\mathsf{TM}}$ - for easy and quick plunging.

Suitable for cutting all types of wood and nail embedded wood. Not suitable for brick, masonry or steel.

| Blade length (mm) | Tooth pitch (mm) | Teeth per inch | Ref. No. | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|---------------------|----------------|----------|------------------|---------------------------|----------------|--------------|
| 300 | 5 | 5 | - | 1 | 1 | 48001600 | 045242253272 |



SAWZALL[™] blade sets

NEW

| | Description | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | AND SHOULD BE SEEN SH |
|-----|--|------------------|---------------------|----------------|--------------|----------|--|
| 1) | SAWZALL™ blade set (5pc) 1 x AX™ wood with nails - 230 mm, 1 x WRECKER™ multi material - 230 mm, 1 x TORCH™ metal - 230 mm, 1 x TORCH™ metal - 150 mm, 1 x TORCH™ metal - 150 mm | 5 | 1 | 49222205 | 045242536528 | 2 | Tropical To Control To |
| 2 | SAWZALL™ carbide demolition blades set (5pc) Wood with nails: 2 x AX™ carbide - 230 mm. Metal: 2 x TORCH™ carbide - 150 mm, 1 x TORCH™ carbide - 230 mm | 5 | 1 | 49222206 | 045242567492 | 3 | |
| 3 | SAWZALL™ blade set (10pc) 3 x THIN KERF metal - 150 mm, 3 x THIN KERF metal - 150 mm, 2 x THIN KERF wood with nails - 150 mm, 1 x THIN KERF wood with nails - 230 mm, 1 x THIN KERF metal - 230 mm | 10 | 1 | 49222211 | 045242536856 | 4 | 888 |
| 4 | SAWZALL™ blade set (12pc) 2 x AX™ wood with nails - 150 mm, 2 x AX™ wood with nails - 230 mm, 4 x TORCH™ metal - 150 mm, 2 x TORCH™ metal - 250 mm, 2 x WRECKER™ multi material - 150 mm | 12 | 1 | 49222229 | 045242536863 | | |
| (3) | SAWZALL™ blade set (13pc) 2 x WRECKER™ multi material - 150 mm, 2 x AX™) wood with nails - 150 mm, 2 x AX™ wood with nails - 230 mm, 4 x TORCH™ metal - 150 mm, 2 x TORCH™ metal - 230 mm, 1 x TORCH™ carbide - 150 mm | 13 | 1 | 49222231 | 045242540686 | ⑤ | |

System accessories - SAWZALL™

| Description | Fits SAWZALL | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---|------------------|---------------------|----------------|---------------|
| Conversion kit: to convert FIXTEC blade reception models to keyed blade reception to accept 20 mm reception blades | SSE 1000 QX,SSPE 1000 QX,SSH 800 QX Hatchet, | | | | |
| Clamp | PSH 18v hatchet,V18 SX,SSPE 1300 QX, M18 FUEL™ SAWZALL,USE 980 X,V28 SX, | 1 | 1 | 42680685 | |
| Screw | SSPE 1500 X | 1 | 1 | 06832976 | |
| Allen key 5/32" | | 1 | 1 | 49960070 | 045242221554 |
| Conversion kit: to convert FIXTEC blade reception models to keyed blade reception to accept 1/2" universal reception blades | SSE 1000 QX,SSPE 1000 QX,SSH 800 QX Hatchet, | | | | |
| Clamp | PSH 18v hatchet,V18 SX,SSPE 1300 QX, M18 FUEL™ SAWZALL,USE 980 X,V28 SX, | 1 | 1 | 49225016 | 045242182060 |
| Screw | SSPE 1500 X | 1 | 1 | 06832976 | |
| Allen key 5/32" | | 1 | 1 | 49960070 | 045242221554 |
| Transport case for sabre saws / SAWZALL $^{\scriptscriptstyle{\text{TM}}}$ | V18 SX,V28 SX | 1 | 1 | 201602001 | 4002395836383 |
| Cases supplied with latches and foam insert. Size 1 (L x W x H) 475 x 358 x 132 mm | PSH 18v hatchet | 1 | 1 | 4932453385 | 4002395146376 |


HACKZALL™ blades

Especially engineered blades for exclusive use on 12 V HACKZALL™.

Bi-Metal construction for increased tooth durability.

Optimised tooth form for aggressive and faster cutting.

Thinner blade body for better speed of cut and up to 35% more cuts per charge vs. standard Bi Metal blades.

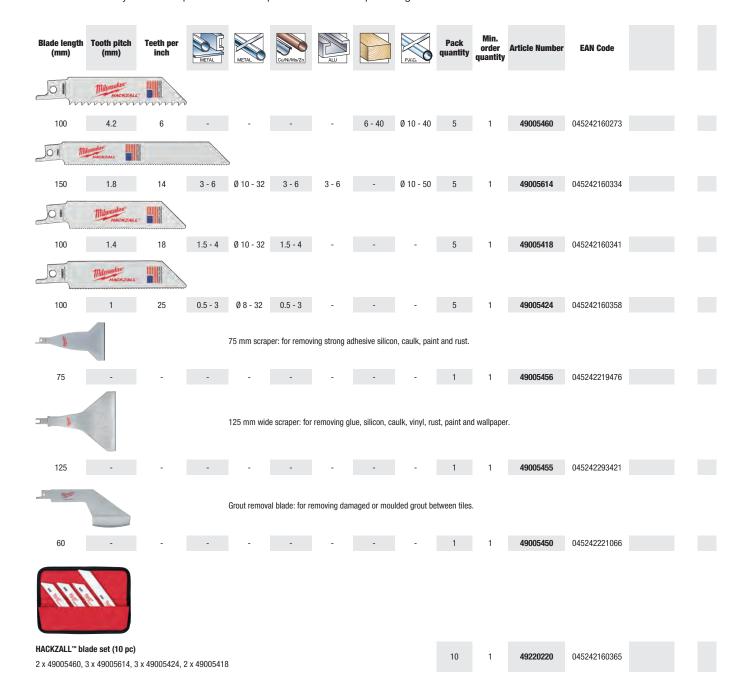

Jigsaw blades

Material qualities

HCS

■ High Carbon Steel jigsaw blades are used for cutting all types of wood and plastics.

HSS

■ High Speed Steel blades are suited to cutting metal, non ferrous metal and aluminium.

Carbide grit

■ These blades have a tungsten carbide grit edge making them suitable for abrasive materials.

TC


Blades with tungsten carbide tipped teeth are ideally suited to glassfibre reinforced products.
Those blades with a continuous tungsten carbide tooth strip cutting edge are suitable for extremely hard materials such as stainless steel.

Bi-Metal

■ Bi-Metal blades consist of high speed steel teeth electron beam welded onto a flexible alloy steel back. These blades offer maximum performance in the most demanding applications in both wood and metal.

Bi-Metal blades offer the following benefits:

- Flexible and shatter resistant
- Longer lifetime. Metal cutting blades offer double the lifetime and wood cutting blades more than 5 times the lifetime over conventional HCS and HSS blades.
- High wear rate and heat resistance ensure the teeth stay sharp longer.
- Faster cutting performance.

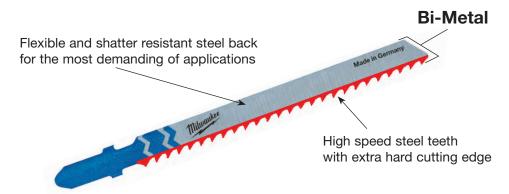

Blade colour code

Shank colour means application



= For all types of wood, laminated chipboard, chipboard, plywood, blockboard and plastics. Silver colour blade body.



= For all types of ferrous and non-ferrous metals, steel, aluminium, brass, copper, stainless steel, lead, tin and sandwich materials. Silver colour blade body.



= For cutting a range of products, carton, rubber, fibreglass, foam and abrasive materials. Black colour blade body.



= Bi-Metal blades come with a white body and then the corresponding colour shank; yellow for wood and blue for metal.

Shank receptions

T-Shank blades

■ Suitable for most major brands.

AEG, Bosch, DeWalt, Festool, Hitachi, Hilti, Mafell, Makita, Metabo, MILWAUKEE®, Ryobi.



Special shank blades

■ We do also offer a range of the most popular blades with either the Makita, or U-Shank reception.

U-Shank: for Black & Decker, Kress, Ryobi, Skil




Packaging





- Common blades are available in 5 and bulk 25 pack quantities. Our 25 pack packaging is reusable allowing for blades to be removed and returned easily.
- Our colour system on the blades is also featured on our packaging in conjunction with our pictograms to ensure you have the right blade for the application.

Technical tips



- The blade length represents the section of the blade with cutting teeth (A-mm). The tooth pitch is measured in millimetres (mm) from tooth point to tooth point (B-mm). Selecting the correct tooth pitch is dependent on the thickness of material being cut. The golden rule is to have three teeth in contact with the material being cut at all times; this is the optimum, as a guidance for thick material such as metals over 4 mm thickness a tooth pitch of 2 mm or more is recommended.
 - For metals with a thickness of 1.5–3.5 mm a tooth pitch of 1.2 to 1.4 is desirable. When cutting thin metal sheet material below 1.5 mm a tooth pitch of 0.7 to 1.2 mm is recommended.

The general rule when cutting wood is the higher the tooth pitch the faster and rougher/coarser the cut will be.

- When cutting extremely thin sheet material it is recommended to place the material onto a thicker backing to prevent the sheet material from breaking.
- We recommend the use of a cooling lubricant to extend the life of the saw blade when cutting metals and plastics.

| Material | Coolant |
|---------------------------------|-------------|
| Cu/Ni/Ms/Zn STARLESS NXX NROSTA | Cutting oil |
| ALU | Turpentine |
| P.V.C. | Water |

Jigsaw blades for wood and plastic



Traditional blades

Traditional blades that deliver good and solid performance.



Curve cutting blades

All of our curve cutting blades are characterised by a narrow blade body for improved manoeuvrability.

Jigsaw blade 4932265312 and 4932430143 has cutting teeth on both sides.

The teeth on the back of the blade allows one to cut tight and acute curves with simplicity.

For best results work without pendulum action when cutting tight curves.

| 3460 78 | Made in Comment | mm | À | | | | | | | | | | | |
|---------|-----------------|-----------------|---------------|----------|-----|------|------|----|------|----|---|------------|---------------|--|
| 50 1.35 | T 101 A0 | < 20 | < 20 | < 15 | Yes | No | Yes | No | No | 5 | 1 | 4932373392 | 4002395348879 | |
| 2746 50 | ! | fade in Germany | | | | | | | | | | | | |
| 50 2 | T 119 B0 | < 20 | - | < 20 | Yes | No | Yes | No | No | 5 | 1 | 4932274650 | 4002395301485 | |
| 4301 43 | CI CI | JRVE Mid | e en Clermany | W | | | | | | | | | | |
| 75 2.5 | Curve | < 30 | < 20 | < 20 | Yes | No | Yes | No | Yes | 5 | 1 | 4932430143 | 4002395378043 | |
| 2653 12 | Market M | ade in Germany | nn | | | | | | | | | | | |
| 75 4/1. | 2 Special | < 30 | - | < 30 | No | Yes | Yes | No | No | 5 | 1 | 4932265312 | 4002395301478 | |
| 3460 78 | N | lade in Germany | ,,,,, | 711 | | | | | | | | | | |
| 75 4 | T 244 D | < 50 | _ | _ | No | Yes | Yes | No | Yes | 5 | 1 | 4932346078 | 4002395312375 | |
| | . 244 0 | . 00 | | | | . 30 | . 30 | | . 50 | 25 | 1 | 4932373492 | 4002395349920 | |

Fast cut blades

The sharp and aggressive tooth geometry is ideal for very fast cutting of wood.

| | 2131 16 | 33 | M | tade in Germany | nnn | | | | | | | | | | | |
|----------|---------|----|-------------|-----------------------------|------|-------|------|--------|------|----|-----|-----|---|------------|---------------|--|
| | | | | | | | | | | | | 5 | 1 | 4932213116 | 4002395301492 | |
| | 75 | 4 | T 144 D | < 50 | - | - | No | Yes | No | No | Yes | 25 | 1 | 4932373487 | 4002395349272 | |
| | | | | | | | | | | | | 100 | 1 | 4932430461 | 4002395381227 | |
| | 3733 91 | | Milwesker M | BI-METAL tade in Germany | | | | | | | | | | | | |
| Bi-Metal | 75 | 4 | T 144 DF | <50 | - | - | No | Yes | No | No | Yes | 5 | 1 | 4932373391 | 4002395348862 | |
| • | 3116 33 | 3 | Market N | tade in Germany | ~~~ | | ~~ | | | | | | | | | |
| | 105 | 4 | T 344 D | <80 | - | - | No | Yes | No | No | Yes | 5 | 1 | 4932311633 | 4002395301508 | |
| | 3547 45 | | Milameter M | lade in Germany | VVVV | rrrrr | VVVV | VVVVVV | 7777 | | | | | | | |
| | 155 | 4 | T 744 D | 5-125 | - | - | No | Yes | No | No | Yes | 5 | 1 | 4932354745 | 4002395324095 | |

Fast and clean cutting blades


Triple sharpened tooth geometry for fast and super clean splinter free cuts. Plunge tip for fast plunging.



3 cut

Clean and splinter free cutting blades

The following blades have diagonally sharpened side teeth resulting in a very clear splinter free cut.

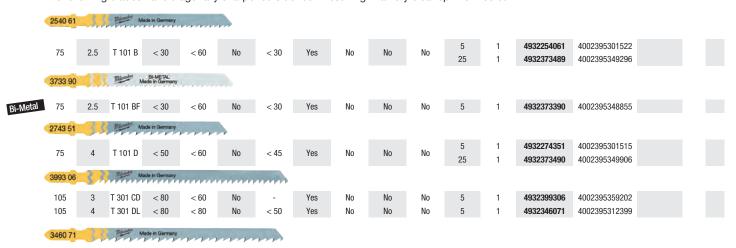

Precise straight cutting blades: Kitchen worktops

The following blades benefit from a thicker blade body guaranteeing extra stiffness and consequently a more accurate vertical cut. Ideal for those applications where a true square cut is necessary - i.e. kitchen worktops.



Special application: Kitchen worktops / laminated chipboard

These blades have a reversed tooth design, this means that the blade cuts on the downward stroke making them extremely suitable for clean and splinter free cuts in laminated chipboard and especially kitchen worktops in situ.

For best results work without pendulum action.



Special application: Laminated flooring / parquet flooring

Blade 4932373392 is ideally suited for cutting curves and irregular shapes. Use blade 4932373083 for straight cuts.



Jigsaw blades for metal



Traditional blades

Blade reference 4939274652 is especially suited to cutting very thin sheet material because of its low 0.7 mm tooth pitch.

For those professionals desiring extra lifetime and durability we recommend the use of Bi-Metal blades in conjunction with a suitable cooling lubricant, the blades lifetime is double that of non Bi-Metal blades.

| | Blade length (mm) | Tooth pitch (mm) | Ref. No. | METAL | Cu/Ni/Ms/Zn | | STAINLESS - NOX NEXOSTA | ALU | P.V.C. | PERSPEX* | | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---------|-------------------------|------------------------|---------------|-----------------------------|-------------|------|----------------------------|--------|--------|----------|----|------------------|---------------------------|--------------------------|--------------------------------|--|
| | 2746 52 | }} | Milmala M | lade in Germany | | | | | | | | | | | | |
| | 55 | 0.7 | T 118 G | 0.5 - 2 | 0.5 - 2 | - | - | - | - | - | No | 5 | 1 | 4932274652 | 4002395301621 | |
| | 2540 63 | 3}} | Milesales M | ade in Germany | | | | | | | | | | | | |
| | 55 | 1.2 | T 118 A | 1.5 - 4 | 1.5 - 4 | - | - | - | - | - | No | 5 25 | 1 | 4932254063 4932373486 | 4002395301614 4002395349265 | |
| | 340011 | *** | Illianista N | BI-METAL lade in Germany | | | | | | | | 20 | • | 4302070400 | 400200040200 | |
| Bi-Meta | | 1.2 | | | 1.5 - 4 | - | 1.2 - 2 | - | - | - | No | 5 | 1 | 4932340011 | 4002395304684 | |
| | 3458 26 | } } | Milwester M | ade in Germany | | | | | | | | | | | | |
| | 66 | 1.2 | T 118 A | 1.5 - 4 | 1.5 - 4 | - | - | - | - | - | No | 5 | 1 | 4932345826 | 4002395313464 | |
| | 3993 07 | ~ } } | Illianustas M | lade in Germany | | | | | | | | | | | | |
| | 105 | | | 1 - 4 | 1 - 4 | < 85 | - | - | - | - | No | 5 | 1 | 4932399307 | 4002395359219 | |
| | 2540 64 | 33 | Thirds M | ade in Germany | | | | | | | | | | | | |
| | 55 | 2 | T 118 B | | 3 - 6 | - | - | 3 - 10 | - | - | No | 5 | 1 | 4932254064 | 4002395301591 | |
| | 3400 12 | *** | Milwander M | BI-METAL ade in Germany | | | | | | | | | | | | |
| Bi-Meta | al 55 | 2 | T 118 BF | 3 - 6 | 3 - 6 | - | 2 - 3 | 3 - 10 | - | 2 - 30 | No | 5 | 1 | 4932340012 | 4002395304691 | |
| | 2746 51 | . } } | Milmander M | BI-METAL lade in Germany | | | | | | | | | | | | |
| Bi-Meta | al 75 | 2.5 | T 101 A | - | 2 - 10 | < 45 | - | 3 - 10 | - | 2 - 20 | No | 5 | 1 | 4932274651 | 4002395301577 | |

Universal application blades

These blades are suitable for cutting a wide variety of materials ranging from mild steel, aluminium, wood with nails, plastics and sandwich composites. Blade 4932373086 with its extra length (155 mm) is suitable for cutting thick corrugated sandwich material.

| 4301 4 | 2 Milesundes BI-METAL TWIN-CUT | Made in Germany | | | | | | | | |
|-------------------------|------------------------------------|-----------------|-----|---------------|---|----|-----|------------|---------------|--|
| Bi-Metal TWIN CUT 91 | 2.5 / 1.8 T 123 XF 2.5 - 10 | 3 - 10 < 50 | - 4 | - 10 | - | No | 5 1 | 4932430142 | 4002395378036 | |
| 2746 | 54 BI-METAL Made in Germany | | | | | | | | | |
| Bi-Metal 105 | 1.2 T 318 AF 1.5 - 4 | 1.5 - 4 < 85 | - | - | - | No | 5 1 | 4932274654 | 4002395301607 | |
| 2746 5 | Made in Germany | | | | | | | | | |
| Bi-Metal 105 | 2 T 318 BF 3 - 6 | 3 - 6 < 85 | - 3 | 3 - 10 4 - 30 | - | No | 5 1 | 4932274653 | 4002395301584 | |
| 3730 8 | Milousian Bi-METAL Made in Germany | | | | | | | | | |
| Bi-Metal 155 | 1 T 718 AF 1 - 4 | 1 - 4 < 125 | - | | - | No | 5 1 | 4932373086 | 4002395346097 | |

Curve cutting blades

Especially narrower saw blade body allows one to cut tight curves in a range of metallic materials.

| 3460 82 | 1 | Milmulas M | ide in Germany | | | | | | | | | | | | |
|---------|-----|------------|----------------|---------|---|---|--------|--------|---|-----|---|---|------------|---------------|--|
| 55 | 1.2 | T 218 A | 1.5 - 4 | 1.5 - 4 | - | - | - | - | - | Yes | 5 | 1 | 4932346082 | 4002395312368 | |
| 3460 81 | | M. M. | | | | | | | | | | | | | |
| 75 | 3 | T 227 D | 3.5 - 6 | 3.5 - 6 | - | - | 4 - 15 | 4 - 30 | - | Yes | 5 | 1 | 4932346081 | 4002395312351 | |

Special application: Aluminium

Most traditional blades are also capable of cutting aluminium, however these two blades benefit from a larger tooth pitch and wider gullets offering better material removal which is an advantage when cutting aluminium.

When cutting curves or irregular shapes in aluminium we recommend the use of blade 4932346081.



Special application: Stainless steel

This blades teeth consist of a carbide tipped strip making it the most suitable and durable blade for steels with a high alloy content such as stainless steel.


For best results work without pendulum action and use cutting oil as a lubricant.




Jigsaw blades for special materials

Special applications: Fibreglass / reinforced plastics / acrylic glass

Blade 4932373387 has tungsten carbide teeth for longer lifetime in hard materials such as fibreglass.

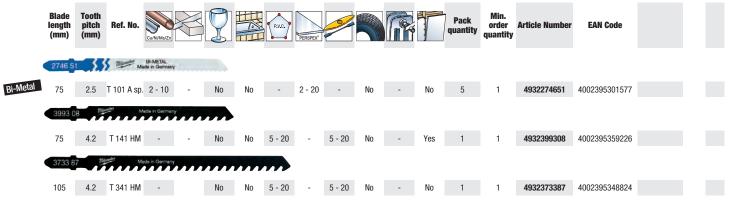

Special application: Abrasive materials / cast iron



Special application: Insulation material




Jigsaw blade sets - T-Shank reception


| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------------|----------------|---------------|
| Jigsaw blades set (5pc) - suitable for applications in wood and metal | | | | |
| | 5 | 1 | 4932345825 | 4002395314850 |
| Jigsaw blade 4932213116, 4932254061, 4932254063, 4932254064, 4932254071 | | | | |



System accessories - Jigsaws

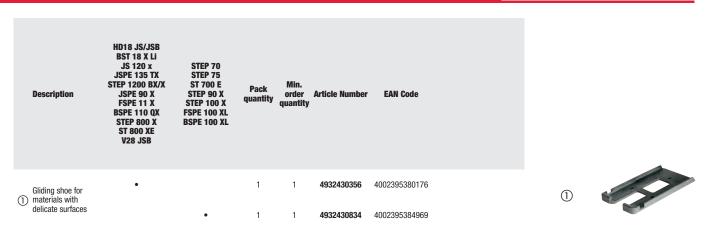

U-Shank jigsaw blades

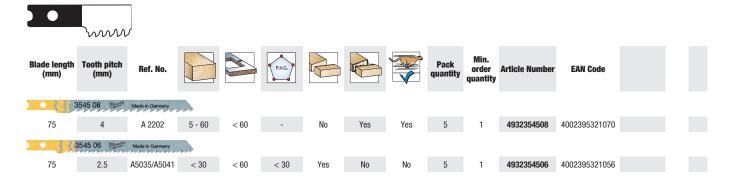

Multitool accessories

Universal blade reception makes MILWAUKEE® blades compatible with the most popular oscillating tools.

| | Description | Teeth per inch | Width (mm) | Length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------|---|------------------------------|-------------------------|-----------------------|------------------|---------------------|----------------------|------------------------------|
| (1) | 19 mm plunge cut blade. Plunge / recess / flush | 16 | 19 | 42 | 1 | 1 | 48900015 | 045242349005 |
| | cutting in wood and PVC | | | | 10 | 1 | 48904015 | 045242475148 |
| 2 | 32 mm plunge cut blade. Plunge / recess / flush | 16 | 32 | 42 | 1 | 1 | 48900030 | 045242349036 |
| O | cutting in wood and PVC | | | | 10 | 1 | 48904030 | 045242468539 |
| <u> </u> | 32 mm fast cut Japanese tooth blade. For fast , | 14 | 32 | 42 | 1 | 1 | 48900055 | 045242355228 |
| 3 | clean cuts in soft and hard wood | ., | 02 | | 10 | 1 | 48904055 | 045242475155 |
| (4) | 64 mm Bi-Metal wide blade. For cuts in sheet metal, | 18 | 64 | 42 | 1 | 1 | 48900050 | 045242353514 |
| 4) | nail embedded wood, plastic and fibreglass | 10 | 04 | 72 | 10 | 1 | 48904050 | 045242468553 |
| (5) | 80 mm flush cut segmented blade. For accurate and flush cuts in wood and plastics | 18 | 80 | 20 | 1 | 1 | 48900045 | 045242349067 |
| 6 | 80 mm Titanium flush segmented blade. Titanium coating for best wear resistance and double the lifetime. For accurate and flush cuts in sheet metal nail embedded wood, plastic and fibreglass | 18 | 80 | 20 | 1 | 1 | 48900035 | 045242349043 |
| 7 | Grout removal blade. For removing damaged grout between wall or floor tiles. Also good for cutting grooves in drywall | Carbide grit | 64 | | 1 | 1 | 48900100 | 045242349074 |
| 8 | Flush cut carbide grit blade. For cutting grooves and slots in plaster, drywall and grout | | 30 | 20 | 1 | 1 | 48900110 | 045242349081 |
| | Multitool blade se | | | | | | | |
| 9 | 2 x 19 mm plunge oblade, 1 x 32 mm fa 2 x 64 mm Bi-Meta cut segmented blace | ast cut Japa I wide blade | neese too , 1 x 80 m | th blade, nm flush | 9 | 1 | 48901009 | 045242474721 |
| 10 | Sanding pad | | 93 | 93 | 1 | 1 | 48902000 | 045242349098 |
| | | Grit | | | | | | |
| | Conding poper | 60 | 93 | 93 | 8 | 1 | 48902060 | 045242349166 |
| 11) | Sanding paper pack (8pc) - Hook | 80 | 93 | 93 | 8 | 1 | 48902080 | 045242349173 |
| | & Loop | 120 240 | 93 93 | 93 93 | 8 | 1 1 | 48902120 48902240 | 045242349135 045242366064 |
| | | 440 | 93 | 93 | υ | ı | 40302240 | 07327230000 4 |













(5)

6

7











CIRCULAR SAW BLADES

CUTS COOLER. INCREASED ACCURACY. LONGER LIFE.









COBALT INFUSED TUNGSTEN CARBIDE TEETH

PRODUCE SHARP AND CLEAN CUTS







Circular saw blades for hand held circular saws

NEW

PTFE coating: Cuts cooler, non stick for quicker cuts. Protects against corrosion and accumulation of resin.

Laser cut vibration slots: Low vibration and increased accuracy. Slots are filled with polyurethane and act as shock absorbers by isolating the teeth from vibration.

High grade laser cut steel: Guaranteed accuracy.

Premium cobalt infused tungsten carbide: Sharp and clean cuts.









| Blade diam- eter (mm) | Bore size (mm) | No. of teeth | Cutting width (kerf) (mm) | Hook Angle | Tooth Form | Thin Kerf* | All Wood Types* | Abrasive Parti- cleboard, Fibre-Plastic cement Board, Fiberglass | Non ferrous metals profiles alu | Fast cut | Clean Cut | Pack quan- tity | Min. order quan- tity | Article Number | EAN Code |
|--------------------------------|----------------------|-----------------|------------------------------------|---------------|---------------|---------------|-----------------------|---|---|----------|--------------|-----------------------|--------------------------------|----------------|---------------|
| 140 | 20 | 18 | 1.6 | +18° | ATB | ~ | ~ | | | ~ | | 1 | 1 | 4932471310 | 4058546289386 |
| 160 | 20 | 24 | 2.2 | +15° | ATB | | V | | | ~ | | 1 | 1 | 4932471290 | 4058546289188 |
| 160 | 20 | 48 | 2.2 | +5° | ATB | | V | | | | ~ | 1 | 1 | 4932471291 | 4058546289195 |
| 160 | 20 | 52 | 2.2 | -5° | TF | | | V | V | | V | 1 | 1 | 4932471292 | 4058546289201 |
| 160 | 20 | 4 | 2.2 | +10° | D | | | ✓ | | ~ | | 1 | 1 | 4932471293 | 4058546289218 |
| 165 | 15.87 | 24 | 1.6 | +15° | ATB | ~ | V | | | V | | 1 | 1 | 4932471311 | 4058546289393 |
| 165 | 15.87 | 40 | 1.6 | +18° | ATB | ~ | ~ | | | | ~ | 1 | 1 | 4932471312 | 4058546289409 |
| 165 | 20 | 24 | 1.6 | +15° | ATB | ~ | V | | | V | | 1 | 1 | 4932471931 | 4058546298302 |
| 165 | 20 | 40 | 1.6 | +18° | ATB | ~ | ~ | | | | ~ | 1 | 1 | 4932471932 | 4058546298319 |
| 165 | 20 | 24 | 2.2 | +15° | ATB | | ~ | | | V | | 1 | 1 | 4932471294 | 4058546289225 |
| 165 | 20 | 48 | 2.2 | +5° | ATB | | ~ | | | | ~ | 1 | 1 | 4932471295 | 4058546289232 |
| 165 | 20 | 52 | 2.2 | -5° | TF | | | ✓ | ~ | | ~ | 1 | 1 | 4932471296 | 4058546289249 |
| 165 | 30 | 24 | 1.8 | +15° | ATB | ~ | ~ | | | ~ | | 1 | 1 | 4932399909** | 4002395365647 |
| 184 | 15.87 | 24 | 1.6 | +15° | ATB | ~ | ~ | | | ~ | | 1 | 1 | 4932471378 | 4058546290061 |
| 184 | 15.87 | 40 | 2.1 | +15° | ATB | ~ | ~ | | | | ~ | 1 | 1 | 4932471379 | 4058546290078 |
| 184 | 30 | 24 | 1.6 | +15° | ATB | ~ | ~ | | | ~ | | 1 | 1 | 4932471297 | 4058546289256 |
| 184 | 30 | 40 | 2.1 | +10° | ATB | ~ | ~ | | | | ~ | 1 | 1 | 4932471298 | 4058546289263 |
| 184 | 30 | 54 | 2.4 | -5° | TF | | | ✓ | ~ | | ~ | 1 | 1 | 4932471299 | 4058546289270 |
| 190 | 30 | 24 | 1.6 | +15° | ATB | • | ~ | | | ~ | | 1 | 1 | 4932471300 | 4058546289287 |
| 190 | 30 | 36 | 1.6 | +15° | ATB | ~ | ~ | | | ~ | | 1 | 1 | 4932471301 | 4058546289294 |
| 190 | 30 | 48 | 2.1 | +10° | ATB | ~ | ~ | | | | ~ | 1 | 1 | 4932471380 | 4058546290085 |
| 190 | 30 | 54 | 2.4 | -5° | TF | | | ✓ | ~ | | ~ | 1 | 1 | 4932471303 | 4058546289317 |
| 190 | 30 | 4 | 1.8 | +10° | D | | | ✓ | | ~ | | 1 | 1 | 4932471304 | 4058546289324 |
| 235 | 30 | 24 | 2.4 | +15° | ATB | | ~ | | | ~ | | 1 | 1 | 4932471305 | 4058546289331 |
| 235 | 30 | 36 | 2.4 | +15° | ATB | | ~ | | | ~ | | 1 | 1 | 4932471306 | 4058546289348 |
| 235 | 30 | 48 | 2.4 | +10° | ATB | | V | | | | ~ | 1 | 1 | 4932471307 | 4058546289355 |
| 235 | 30 | 60 | 2.4 | +10° | ATB | | ~ | | | | ~ | 1 | 1 | 4932471308 | 4058546289362 |
| 235 | 30 | 60 | 2.4 | -5° | TF | | | V | V | | V | 1 | 1 | 4932471309 | 4058546289379 |

^{*}Thin Kerf: Cordless optimised, extra thin cutting width for maximum runtime

^{*}All wood types: Soft/ hardwood, plywood, laminated chipboard, melamine, MDF

^{**}Standard blades without PTFE coating and vibration slots

Circular saw blades for mitre saws

NEW

PTFE coating: Cuts cooler, non stick for quicker cuts. Protects against corrosion and accumulation of resin. Laser cut vibration slots: Low vibration and increased accuracy. Slots are filled with polyurethane and act as shock absorbers by isolating the teeth from vibration.

High grade laser cut steel: Guaranteed accuracy.

Premium cobalt infused tungsten carbide: Sharp and clean cuts.



| Blade diameter (mm) | Bore size (mm) | No. of teeth | Cutting width (kerf) (mm) | Hook Angle | Tooth Form | Thin Kerf* | | Abrasive Particle- board, Fibre- cement Board, Fiber- glass* | | Non ferrous metals Fas profiles alu | st cut | Clean Cut | Pack quan- tity | Min. order quan- tity | Article Number | EAN Code |
|---------------------------|-------------------|-----------------|------------------------------------|---------------|---------------|---------------|---|---|---|---|--------|--------------|-----------------------|--------------------------------|----------------|---------------|
| 190 | 30 | 40 | 2.4 | -5° | ATB | ~ | ~ | | | | ~ | | 1 | 1 | 4932471314 | 4058546289423 |
| 216 | 30 | 24 | 2.4 | -5° | ATB | | ~ | | | | ~ | | 1 | 1 | 4932471315 | 4058546289430 |
| 216 | 30 | 48 | 2.4 | -5° | ATB | | ~ | | | | ~ | | 1 | 1 | 4932471316 | 4058546289447 |
| 216 | 30 | 60 | 2.4 | -5° | ATB | | ~ | | | | | ~ | 1 | 1 | 4932471317 | 4058546289454 |
| 216 | 30 | 80 | 2.4 | -5° | TF | | | | ~ | ~ | | ~ | 1 | 1 | 4932471319 | 4058546289478 |
| 250 | 30 | 40 | 2.8 | +15° | ATB | | ~ | | | 1 | ~ | | 1 | 1 | 4932472015 | 4058546324117 |
| 250 | 30 | 60 | 2.8 | +15° | ATB | | ~ | | | | | ~ | 1 | 1 | 4932472016 | 4058546324124 |
| 254 | 30 | 60 | 3.0 | -5° | ATB | | ~ | | | | ~ | | 1 | 1 | 4932471320 | 4058546289485 |
| 254 | 30 | 80 | 3.0 | -5° | TF | | | | ~ | V | | ~ | 1 | 1 | 4932471318 | 4058546289461 |
| 305 | 30 | 60 | 3.0 | -5° | ATB | | ~ | | | | ~ | | 1 | 1 | 4932471321 | 4058546289492 |
| 305 | 30 | 100 | 3.0 | -5° | ATB | | ~ | | | | | ~ | 1 | 1 | 4932471322 | 4058546289508 |
| 305 | 30 | 96 | 3.0 | -5° | TF | | | | V | ~ | | ~ | 1 | 1 | 4932471323 | 4058546289515 |

^{*}Thin Kerf: Cordless optimised, extra thin cutting width for maximum runtime

Circular saw blades for table saws

NEW

PTFE coating: Cuts cooler, non stick for quicker cuts. Protects against corrosion and accumulation of resin.

Laser cut vibration slots: Low vibration and increased accuracy. Slots are filled with polyurethane and act as shock absorbers by isolating the teeth from vibration.

High grade laser cut steel: Guaranteed accuracy.

Premium cobalt infused tungsten carbide: Sharp and clean cuts.

| Blade diameter (mm) | Bore size (mm) | No. of teeth | Cutting width (kerf) (mm) | Hook Angle | Tooth Form | Thin Kerf* | | Plastics | Non ferrous metals Fast o profiles alu | eut Clean Cut | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------|-------------------|-----------------|------------------------------------|---------------|---------------|---------------|---|----------|--|---------------|------------------|---------------------------|----------------|---------------|
| 210 | 30 | 16 | 2.4 | +15° | ATB | ~ | ~ | | V | | 1 | 1 | 4932471324 | 4058546289522 |
| 210 | 30 | 48 | 2.8 | +10° | ATB | ~ | ~ | | | ~ | 1 | 1 | 4932471325 | 4058546289539 |
| 210 | 30 | 24 | 1.9 | +25° | ATB | ~ | ~ | | ~ | | 1 | 1 | 4932464174** | 4058546221195 |

^{*}Thin Kerf: Cordless optimised, extra thin cutting width for maximum runtime

^{*}All wood types: Soft/ hardwood, plywood, laminated chipboard, melamine, MDF

^{*}All wood types: Soft/ hardwood, plywood, laminated chipboard, melamine, MDF

^{**}Standard blades without PTFE coating and vibration slots

Circular saw blades for metal

- 1. Engineered tooth geometry for optimum performance.
- 2. Top grade carbide and cermet tooth tips for superior lifetime.
- 3. Fully hardened and tensioned blade body for accurate cuts.
- 4. Deep gullets provide rapid and efficient chip removal.
- 5. Laser cut resin filled expansion slots for noise and vibration dampening.
- Cuts clean. Burr free edges reduce extra finishing processes.
- Cuts cool. The cut material can be handled immediately after cutting.
- Cuts fast. Quicker than all other conventional cutting methods.
- Cost cutter. Less expensive per cut than abrasive discs.
- Reduced noise.
- Reduced vibration.
- Total safety: no sparks, no coolants, cool to touch.





| <u>5</u> Ø n | nm | | E | thickness | | up to 2.5mm | E | | | | | sheets | | | | | - (s) | | | | |
|---------------------------|-------------------|--------------|------------------------------|----------------------------|------------|-------------------|---|------------|------------|------------|---------------|--------------------|-----------|--------|-----------|-------|---|------------------|------------------------|----------------|--------------|
| Blade diameter (mm) | Bore size (mm) | No. of teeth | Cutting width (kerf) (mm) | Material wall thic (mm) | Mild steel | Sheet steel up to | Corrugated stee I panels up to 2.5mm | Steel tube | Steel pipe | Angle iron | Steel channel | Stainless steel sh | Cast iron | Copper | Aluminium | Rebar | Sandwich material (steel, foam, panels | Pack quantity | Min. order quantity | Article Number | EAN Code |
| 135 | 20 | 30 | 1.6 | 1-2.5 | ~ | ~ | ~ | ~ | ~ | ~ | ~ | • | × | × | × | x | ~ | 1 | 1 | 48404070 | 045242233786 |
| 133 | 20 | 50 | 1.6 | 1-2.5 | × | × | × | × | × | × | × | × | × | ~ | ~ | × | • | 1 | 1 | 48404075 | 045242233793 |
| 150 | 20 | 34 | 1.6 | 1-2.5 | ~ | ~ | ~ | ~ | ~ | ~ | ~ | • | × | × | × | × | ~ | 1 | 1 | 48404080 | 045242510283 |
| 165 | 15.87 | 48 | 1.6 | 1-2.5 | V | V | ~ | V | ~ | V | ~ | × | × | x | × | × | ~ | 1 | 1 | 48404015 | 045242134298 |
| 174 | 20 | 36 | 1.65 | >2.5 | ~ | × | × | ~ | ~ | V | V | × | × | × | × | × | × | 1 | 1 | 48404016 | 045242134120 |
| 1/4 | 20 | 50 | 1.65 | 1-2.5 | ~ | ~ | ~ | ~ | ~ | V | ~ | • | × | × | × | × | ~ | 1 | 1 | 48404017 | 045242151738 |
| 203 | 15.07 | 42 | 1.8 | >2.5 | ~ | × | × | ~ | ~ | ~ | V | × | × | × | × | X | × | 1 | 1 | 48404515 | 045242134465 |
| 203 | 15.87 | 50 | 1.8 | 1-2.5 | V | ~ | ~ | ~ | V | ~ | ~ | • | × | x | × | × | ~ | 1 | 1 | 48404520 | 045242134472 |

- ✓ Most suitable. Recommended for these materials.
- Suitable. Recommended for intermittent use in these materials.
 Very good cutting characteristics, but greatly reduced lifetime of the blade.
- * Not suitable. Not recommended for these materials.

Optimising Blade Life

- 1. Clamp the workpiece securely to avoid vibration.
- 2. Do NOT stack or bundle cutting material. The gaps between layers allow for more opportunities to chip the teeth. The life of the blade is severely affected by this type of cutting.
- 3. Lower the blade to its maximum cutting capacity and allow the tool to come to full speed before applying the blade to the material.
- 4. Do NOT force the saw blade into the material. Start gently, then gradually apply enough pressure to avoid sparks.
- 5. Optimal cutting speed and pressure will produce little or no sparks. Sparking creates heat build up which shortens saw blade life.
- 6. Keep the cut straight. If following a cut line and you wander off the line, getting back on line may cause side loading of the blade and break teeth. Use a edge guide whenever possible.
- 7. Do NOT apply side pressure on the blade as this will cause chipping of the teeth.
- 8. Periodically allow the tool to run free of the cutting material to cool the blade and tool especially when making long cuts or cuts in thick material.

Bandsaw blades

Choosing the right tooth geometry

| 8/10 Tpi Tooth pitch 2.3/1.8 mm |
|------------------------------------|
| FOR CUTTING |

STOCK

5 to 13 mm

10 Tpi Tooth pitch 2.5 mm

FOR CUTTING

STOCK

8 to 13 mm

12/14 Tpi Tooth pitch 1.8/1.4 mm

FOR CUTTING

STOCK

4 to 8 mm

14 Tpi Tooth pitch 1.8 mm

STOCK

5 to 8 mm

18 Tpi Tooth pitch 1.4 mm

STOCK

4 to 5 mm

FOR CUTTING STOCK < 4 mm

25 Tpi



Premium Bi-Metal bandsaw blades

NEW

Multi pitch Bi-Metal blades with matrix II high speed steel teeth with 8% cobalt outlast conventional blades up to 3 times, requiring fewer blade changes. Precision formed teeth create fast, clean cuts.

Optimised for cordless bandsaws: More cuts per charge. Suitable for cutting: angle iron, galvanised pipe and even tougher steels such as cast iron and stainless steel.

NEW Premium bandsaw blade 1139.83 x 12.7 x 0.51 mm (Corded & M18 Deep Cut)

| Material wall thickness (mm) | Tooth pitch (mm) | Teeth per inch | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------|---------------------|----------------|------------------|---------------------|----------------|--------------|
| 5 - 13 | 3.1 / 2.5 | 8 / 10 | 3 | 1 | 48390601 | 045242530298 |
| 5-15 | 3.1 / 2.3 | 6710 | 25 | 1 | 48390605 | 045242539697 |
| 4 0 | 2.1 / 1.8 | 10 / 14 | 3 | 1 | 48390611 | 045242530328 |
| 4 - 8 | 2.1 / 1.8 | 12 / 14 | 25 | 1 | 48390615 | 045242539703 |



NEW Premium bandsaw blade 898.52 x 12.7 x 0.51 mm (M18 Compact)

| Material wall thickness (mm) | Tooth pitch (mm) | Teeth per inch | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------|---------------------|----------------|------------------|---------------------|----------------|--------------|
| 5 - 13 | 3.1 / 2.5 | 8 / 10 | 3 | 1 | 48390609 | 045242536412 |
| 5 - 13 | 3.1 / 2.3 | 6/10 | 25 | 1 | 48390606 | 045242537754 |
| 4 - 8 | 2.1 / 1.8 | 10 / 14 | 3 | 1 | 48390619 | 045242536429 |
| 4 - 8 | 2.1 / 1.8 | 12 / 14 | 25 | 1 | 48390616 | 045242537761 |



NEW Premium bandsaw blade 687.57 x 12.7 x 0.51 mm (M12 Sub Compact)

| Material wall thickness (mm) | Tooth pitch (mm) | Teeth per inch | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------------|------------------|----------------|---------------|---------------------|----------------|--------------|
| 4 - 8 | 2.1 / 1.8 | 12 / 14 | 3 | 1 | 48390711 | 045242536436 |



Bi-Metal bandsaw blades

Suitable for cutting: Angle iron, galvanised pipe and even thougher steels such as cast iron and stainless steel.

Bandsaw blade 1139.83 x 12.7 x 0.51 mm (Corded & M18 FUEL™)

| Material wall thickness (mm) | Tooth pitch (mm) | Teeth per inch | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------------|---------------------|----------------|------------------|---------------------|----------------|--------------|
| ≥ 8 | 2.5 | 10 | 3 | 1 | 48390501 | 045242132096 |
| 5 - 8 | 1.8 | 14 | 3 | 1 | 48390511 | 045242132164 |
| 4 - 5 | 1.4 | 18 | 3 | 1 | 48390521 | 045242132263 |
| ≤ 4 | 1.0 | 25 | 3 | 1 | 48390531 | 045242132362 |



Bandsaw blade 898.52 x 12.7 x 0.51 mm (M18)

| Material wall thickness (mm) | Tooth pitch (mm) | Teeth per inch | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------------|---------------------|----------------|------------------|------------------------|----------------|--------------|
| 5 - 8 | 1.8 | 14 | 3 | 1 | 48390519 | 045242201594 |
| 4 - 5 | 1.4 | 18 | 3 | 1 | 48390529 | 045242201747 |
| - 1 | 1.0 | O.E. | 2 | 1 | 40200E20 | 045040001015 |



Bandsaw blade 687.57 x 12.7 x 0.51 mm (M12)

| Material wall thickness (mm) | Tooth pitch (mm) | Teeth per inch | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------|---------------------|----------------|------------------|---------------------|----------------|--------------|
| 2.5 - 8 | 1.4 | 18 | 3 | 1 | 48390572 | 045242272341 |



SPEED CROSS

MILWAUKEE® SPEEDCROSS DIAMOND BLADES ARE ENGINEERED FOR ALL CONSTRUCTION SITE PROFESSIONALS WHO DEMAND ONLY THE BEST IN PERFORMANCE WHEN WORKING IN THE TOUGHEST ENVIRONMENTS.





Speedcross Blades

SPEED CROSS

MAXIMUM SPEED, LONG LIFE, LOW VIBRATION!

- Universal blades for a variety of materials
- Classed into two categories for maximum lifetime
- 10 mm segments height (STEELHEAD™: 4mm) to ensure long lifetime
- Laser welded segments for best performance
- Low vibration








AUDD ABRASIVE UNIVERSAL

Application areas

The Speedcross blades are both universal in application but their best performance is achieved at different ends of the spectrum.

The HUDD is predominantly a blade for very hard to medium-hard general building materials, the harder the material the better the performance. Alternatively the AUDD is most suitable for hard materials to soft/abrasive materials, its best performance is achieved when used in standard hardness concrete and general building materials.

Hard materials Soft/Abrasive materials

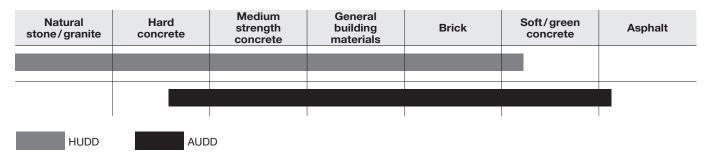

Speedcross HUDD









| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------|-----------------------|----------------|------------------------|--------------------|------------------|------------------------|----------------|---------------|
| HUDD 115 | 115 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399819 | 4002395364749 |
| HUDD 125 | 125 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399820 | 4002395364756 |
| HUDD 150 | 150 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399821 | 4002395364763 |
| HUDD 230 | 230 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399822 | 4002395364770 |
| HUDD 350* | 350 | 25.4 | 10 | 2.6 | 1 | 1 | 4932471985 | 4058546298845 |

Speedcross AUDD











| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------|-----------------------|----------------|---------------------|--------------------|---------------|------------------------|----------------|---------------|
| AUDD 115 | 115 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399823 | 4002395364787 |
| AUDD 125 | 125 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399824 | 4002395364794 |
| AUDD 150 | 150 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399825 | 4002395364800 |
| AUDD 230 | 230 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399826 | 4002395364817 |
| AUDD 350* | 350 | 25.4 | 10 | 2.6 | 1 | 1 | 4932471987 | 4058546298869 |

^{*}NEW products added to the line.

Premium STEELHEAD™ blade

NEW

 ${\tt STEELHEAD}^{\tiny{\texttt{TM}}} \ is \ most \ suitable \ for \ steel \ and \ stainless \ steel. \ Also \ suitable \ for \ heavily \ reinforced \ concrete.$

High density of special brazed diamonds ensure a very aggressive cutting progress.

Due to the versatility and the outstanding performance the diamond disc is also perfect for fire brigades and for rescue operations.









| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------|--------------------|----------------|---------------------|--------------------|------------------|---------------------|----------------|---------------|
| STEELHEAD™ 350 | 350 | 25.4 | 4 | 2.8 | 1 | 1 | 4932471988 | 4058546298876 |

Diamond blades

Diamond blade DHMM

A brazed diamond disc designed for a wide range of applications.

Outstanding cutting performance due to extremely high diamond concentration.

Suitable for a vast variety of material like PVC, granite, tiles, hard artificial stone, composite material, drywall, thin wood, threaded rods and sheet metal.











| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------|-----------------------|----------------|---------------------|--------------------|------------------|---------------------|----------------|---------------|
| DHMM 76 | 76 | 10 | 2.2 | 1.2 | 1 | 1 | 4932471333 | 4058546289614 |

Diamond blades DUT

A general purpose turbo rimmed blade for cutting a wide variety of general building materials. The turbo rim ensures clean chip free cuts.









| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------|-----------------------|----------------|---------------------|--------------------|------------------|---------------------|----------------|---------------|
| DUT 115 | 115 | 22.23 | 10 | 2.2 | 1 | 1 | 4932399526 | 4002395361731 |
| DUT 125 | 125 | 22.23 | 10 | 2.3 | 1 | 1 | 4932399527 | 4002395361748 |
| DUT 180 | 180 | 22.23 | 10 | 2.4 | 1 | 1 | 4932399528 | 4002395361755 |
| DUT 230 | 230 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399529 | 4002395361762 |

Diamond blades DUH

A trade laser welded quality blade with exceptional performance in hard materials such as hard concrete, block paviors and masonry products.









| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|----------|--------------------|----------------|---------------------|--------------------|------------------|---------------------|----------------|---------------|--|
| DUH 115 | 115 | 22.23 | 10 | 2.2 | 1 | 1 | 4932399539 | 4002395361861 | |
| DUH 125 | 125 | 22.23 | 10 | 2.3 | 1 | 1 | 4932399540 | 4002395361878 | |
| DUH 180 | 180 | 22.23 | 10 | 2.4 | 1 | 1 | 4932399541 | 4002395361885 | |
| DUH 230 | 230 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399542 | 4002395361892 | |
| DUH 350* | 350 | 25.4 | 10 | 2.8 | 1 | 1 | 4932471986 | 4058546298852 | |

* NEW products added to the line.

Diamond blades DHTS

A trade quality turbo blade with extra thin body for very fast, precise and chip free cuts in thin materials such as granite, marble slabs and tiles (type: porcelain, gres, ceramic).

Due to the high quality of this blade it is also suitable for cutting most building materials.









| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------|-----------------------|----------------|---------------------|--------------------|------------------|---------------------|----------------|---------------|
| DHTS 76 | 76 | 10 | 5 | 1 | 1 | 1 | 4932464715 | 4058546226602 |
| DHTS 115 | 115 | 22.23 | 10 | 1.2 | 1 | 1 | 4932399145 | 4002395357550 |
| DHTS 125 | 125 | 22.23 | 10 | 1.2 | 1 | 1 | 4932399146 | 4002395357567 |
| DHTS 230 | 230 | 22.23 | 10 | 1.9 | 1 | 1 | 4932399550 | 4002395361977 |

Diamond blades DHTi

Specifically designed turbo rimmed blade for clean cut edges in ceramic tiles and thin natural stone tiles / slabs.









| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------|--------------------|----------------|---------------------|--------------------|------------------|---------------------|----------------|---------------|
| DHTi 115 | 115 | 22.23 | 8 | 2.0 | 1 | 1 | 4932399552 | 4002395361991 |
| DHTi 125 | 125 | 22.23 | 8 | 2.1 | 1 | 1 | 4932399553 | 4002395362004 |
| DHTi 230 | 230 | 22.23 | 8 | 2.6 | 1 | 1 | 4932399555 | 4002395362028 |

Diamond blades DSU

A trade quality universal blade, specially designed for hard and abrasive materials.

Laser welded segments provide long lifetime and excellent cutting performance. Recommended for use with wall chasers.









| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------|-----------------------|----------------|---------------------|--------------------|------------------|---------------------|----------------|---------------|
| DSU 125 | 125 | 22.23 | 10 | 2.4 | 1 | 1 | 4932373147 | 4002395346455 |
| DSU 150 | 150 | 22.23 | 10 | 2.4 | 1 | 1 | 4932373148 | 4002395346462 |

Diamond blades DU

A general purpose blade offering good performance in speed and lifetime in a wide variety of construction materials.









| Туре | Disc diameter (mm) | Bore size (mm) | Segment height (mm) | Cutting width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------|-----------------------|----------------|---------------------|--------------------|------------------|---------------------|----------------|---------------|
| DU 115 | 115 | 22.23 | 10 | 2.2 | 1 | 1 | 4932399521 | 4002395361687 |
| DU 125 | 125 | 22.23 | 10 | 2.3 | 1 | 1 | 4932399522 | 4002395361694 |
| DU 180 | 180 | 22.23 | 10 | 2.4 | 1 | 1 | 4932399523 | 4002395361700 |
| DU 230 | 230 | 22.23 | 10 | 2.6 | 1 | 1 | 4932399524 | 4002395361717 |

Diamond blades: Which diamond cutting blade for which material?

| Material | Туре | | dcross nium | | | Profe | ssional | | |
|--------------------------------------|------|----------|----------------|----|-----|-------|---------|------|-----|
| Waterial | Туре | HUDD | AUDD | DU | DUT | DUH | DHTS | DHTi | DSU |
| Abrasive refractory materials | | • | ~ | | | | | | |
| Aerated concrete/breeze blocks | | • | ~ | ~ | ~ | ~ | | | • |
| Artificial stone | | ~ | | | ~ | ~ | | | ~ |
| Artificial stone - hard | | ~ | | | | ~ | ~ | • | ~ |
| Asphalt | | | • | | | | | | |
| Basalt | | ~ | V | | ~ | ~ | | | ~ |
| Brick – very hard, engineering brick | | ~ | | | • | ~ | | | ~ |
| Brick - medium to hard | | ~ | | • | • | ~ | | | ~ |
| Brick – medium to soft | | ~ | ~ | • | • | • | | | ~ |
| Concrete – hard | | ~ | • | | | ~ | | | ~ |
| Concrete – medium | | ~ | ~ | ~ | ~ | ~ | | | ~ |
| Concrete - soft/green | | • | ~ | | | | | | • |
| Concrete with flint aggregate | | * | ~ | | | | | | |
| Concrete with flint and rebar | | • | ~ | | | | | | |
| Concrete kerbstones | | ~ | ~ | | | ~ | | | ~ |
| Concrete lintels | | ~ | • | | | ~ | | | ~ |
| Concrete block paviors | | ~ | ~ | • | • | ~ | | | ~ |
| Concrete tiles | | ~ | V | ~ | V | V | • | | ~ |
| Concrete reinforced with rebar | | ~ | • | • | • | ~ | | | ~ |
| Concrete slabs | | ~ | • | | | V | | | ~ |
| Concrete slabs with aggregate | | ~ | ~ | | • | ~ | | | ~ |
| Fireclay | | ~ | V | | | V | | | ~ |
| General building materials | | ~ | ~ | ~ | ~ | ~ | | | ~ |
| Gneiss | | ~ | | | | • | | | • |
| Granite | | ~ | | | ~ | ~ | | | ~ |
| Granite tiles/slabs | | • | | | V | • | ~ | | • |
| Lime/sandstone blocks – hard | | ~ | ~ | | | ~ | | | ~ |
| Lime/sandstone blocks - medium | | ~ | V | • | • | ~ | | | |
| Lime/sandstone - soft/abrasive | | • | ~ | • | • | • | | | • |
| Marble tiles/slabs | | • | | | V | • | V | • | ~ |
| Metal channel/profiles | | | | | | | • | | |
| Poroton | | ~ | V | ~ | V | ~ | | | ~ |
| Porphyry | | ~ | | | • | ~ | ~ | | ~ |
| Roof tiles – clay | | ~ | • | • | V | • | ~ | | ~ |
| Roof tiles – concrete | | ~ | ~ | | V | • | ~ | | ~ |
| Screed | | • | ~ | • | • | • | | | • |
| Slate | | ~ | • | • | V | ~ | ~ | | • |
| Stoneware/clay tiles | | ~ | ~ | | V | ~ | | | V |
| Tiles – ceramic | | - | | | • | | ~ | ~ | |
| Tiles – porcelain and gres type | | | | | • | | ~ | • | |
| Tiles – terrazo type | | V | • | | ~ | V | ~ | • | 1 |

[✓] Most suitable. Recommended for these materials. Very long service life and very good cutting characteristics.

[◆] Suitable. Recommended for intermittent use in these materials. Good service life and cutting characteristics.

Combi-segment diamond cup wheels

All arounder in applications:

For quick grinding down of thick concrete layers.

For levelling of concrete, granite and natural stone surfaces.

For edge grinding applications e.g. grinding off high edges of concrete, granite, natural stone tiles.

For roughening prior to covering with a new layer of coating.

High quality diamonds and special soft bonding for low wear, especially in hard materials.

Large openings for better dust removal and segment cooling.









| Туре | Diameter (mm) | Bore size (mm) | No. of segments | Cup wheel height [mm] | | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|------------------|-------------------|-----------------|--------------------------|-----|------------------|------------------------|----------------|---------------|--|
| DCWU 100 Universal wheel for grinding and levelling applications. High stock removal | 100 | 22.23 | 16 | 21 | 5 | 1 | 1 | 4932451185 | 4002395138739 | |
| DCWU 125 Universal wheel for grinding and levelling applications. High stock removal | 125 | 22.23 | 20 | 21 | 5 | 1 | 1 | 4932451186 | 4002395138746 | |
| DCWUT 125 Turbo type segment for levelling, edge grinding and for smooth finishing. Fine finish for concrete and natural stone | 125 | 22.23 | Turbo | 21 | 5 | 1 | 1 | 4932451187 | 4002395138753 | |
| PCD segment for removal of special substances: thermoplastic and expoxy based coatings, acrylic paint, glue, tile adhesive, screed, plaster | 125 | 22.23 | 6 | 18.5 | 4/7 | 1 | 1 | 4932451188 | 4002395138760 | |

| | DCWU 100 | DCWU 125 | DCWUT 125 | DCWS 125 |
|---|----------|----------|-----------|----------|
| Acrylic paint and coatings | | | | ~ |
| Aerated and breeze concrete blocks | V | ~ | ✓ | |
| Bitumen | | | | ~ |
| Concrete hard | ~ | ~ | ~ | |
| Concrete soft or green | • | • | • | |
| Epoxy resin coatings and glues | | | | V |
| Granite | • | • | • | |
| Lime and sandstone blocks hard | ~ | ~ | V | |
| Lime and sandstone blocks soft and abrasive | • | • | • | • |
| Marble | • | • | • | |
| Plasterboard | • | • | • | |
| Porphyry | • | • | • | |
| Screed | • | • | • | |
| Thermoplastic protective paint, glue | | | | V |
| Tile adhesive | • | • | • | ~ |

- ✓ Most suitable.
- ♦ Suitable for intermittent use.

System accessories - Wall chasers

AUDD blade is a perfect solution for 80% of wall chaser applications.

- 30% less loading on the machine compared to the MILWAUKEE $^{\!\circ}$ DU blade.
- 40% higher speed of cut compared to the MILWAUKEE $^{\!\circ}$ DU blade.



SPEED CROSS

| | 1 | 2 | 3 |
|--|--|----------|-----|
| | HUDD | AUDD | DSU |
| Abrasive refractory materials | * | ✓ | |
| Aerated and breeze concrete blocks | • | ✓ | • |
| Brick medium to soft | ✓ | ✓ | ~ |
| Concrete medium | ✓ | ✓ | ~ |
| Concrete reinforced with rebar | ✓ | * | ~ |
| Concrete with flint and rebar | • | V | |
| Fireclay | ✓ | ✓ | ~ |
| General building materials | ✓ | ✓ | ~ |
| Granite | ✓ | | ~ |
| Lime and sandstone blocks soft and abrasive | • | V | + |
| Lime and sandstone blocks medium | ✓ | ✓ | |
| Screed | • | V | + |
| An item as a few and a second A 1 to 9 and a 19 at 199 | and the second s | | |






✓ Maximum performance

♦ Limited suitability - recommended for intermittent use

| | Description | Fits wa | II chasers | Pack quantity | Min. order quantity | Article Number | EAN Code | | |
|---|---|-----------------------------------|---|------------------|------------------------|----------------|---------------|------------|--|
| | Transport case for wall chasers | MFE 1500, MFE 1305, MF 1900 | WCE 30, WCS 45, DME 30,DME 45 | 1 | 1 | 4932383357 | 4002395357390 | | |
| (| Two hole spanner straight | MFE 1500, MFE 1305, MF 1900 | DME 30,DME 45, WCS 45,DME 65, WCE 65,WCE 30 | 1 | 1 | 4932367712 | 4002395338467 | 4 | |
| (| 5) T-handle key | MFE 1500, MFE 1305, MF 1900 | WCE 30,WCS 45, WCE 65,DME 30, DME 45,DME 65 | 1 | 1 | 4931362928 | 4002395661879 | • | |
| | Dust protection grille against entry of ground particles | MFE 1500, MFE 1305, MF 1900 | WCE 30,WCS 45, DME 30,DME 45 | 1 | 1 | 4932329397 | 4002395303892 | (5) | |
| (| Dust protection grille against entry of ground particles | | WCE 65,DME 65 | 2 | 1 | 4932326525 | 4002395303311 | 6 | |
| | Adaptor with bayonet fitting for direct connection of hose to machine | MFE 1500, MFE 1305, MF 1900 | WCE 30,WCS 45, WCE 65,DME 30, DME 45,DME 65 | 1 | 1 | 4932362778 | 4002395334285 | 7 | |
| (| 7) Side handle | MFE 1500, MFE 1305, MF 1900 | WCE 30,WCS 45, DME 30,DME 45 | 1 | 1 | 4932409546 | 4002395370870 | <u> </u> | |
| | Flange nut | MFE 1305 | DME 1300 | 1 | 1 | 4932334667 | 4002395304448 | | |
| | Clamping flange | MFE 1305 | DME 1300 | 1 | 1 | 4932334706 | 4002395304455 | | |
| | Spacer set. Contents 6 rings | MFE 1305 | | 6 | 1 | 4931334675 | 4002395762804 | | |

Cutting and grinding discs

MILWAUKEE® Type - how to find the right disc

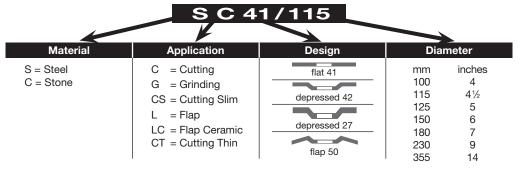





Extended life and moisture protection with PRO+**

Special mixture delivers:

Up to 20% longer lifetime vs. MILWAUKEE® contractor series.

Up to 20% less dust development vs. MILWAUKEE® contractor series.

The new formula HydroProtect prevents the age-related loss of performance and still provides almost the entire performance after months of storage.

■ Benefits:

Reduced costs per cut and shorter set up times.

Reduction of wheel deterioration during the storage interval. $\label{eq:control}$

Longer lasting high-performance.







Thin metal cutting discs PRO+

Applications: Iron and sulphur free top line thin cut-off wheels for all steels. Best suitable for stainless and acid-resistant steel, hardox, heat-resistant cast steel, spring steel, mild and tool steel.

Characteristics: 50% less cutting time and 50% less dust than standard 3 mm thick discs. Lower material loss.



| | Туре | Disc diameter (mm) | Thickness (mm) | Bore size (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----|------------------------|-----------------------|----------------|----------------|------------------|------------------------|----------------|---------------|--|
| 41 | SCS 41 / 76 | 76 | 1 | 10 | 5 | 1 | 4932464717 | 4058546226626 | |
| _ | SCS 41 / 115 | 115 | 1 | 22.2 | 1 | 50 | 4932451484 | 4002395163953 | |
| - 1 | ① Counter display (200 | x SCS 41 / 115 discs) | | | 200 | 1 | 4932451485 | 4002395163960 | |
| | SCS 41 / 115 | 115 | 1.5 | 22.2 | 1 | 50 | 4932451486 | 4002395163977 | |
| | SCS 41 / 125 | 125 | 1 | 22.2 | 1 | 50 | 4932451487 | 4002395163984 | |
| - 1 | ① Counter display (200 | x SCS 41 / 125 discs) | | | 200 | 1 | 4932451488 | 4002395163991 | |
| _ | SCS 41 / 150 | 150 | 1.5 | 22.2 | 1 | 25 | 4932471386 | 4058546290146 | |
| | SCS 41 / 180 | 180 | 1.5 | 22.2 | 1 | 25 | 4932451489 | 4002395161300 | |
| | SCS 41 / 230 | 230 | 1.9 | 22.2 | 1 | 25 | 4932451490 | 4002395161317 | |
| | SCS 41 /350 | 350 | 4 | 25.4 | 1 | 10 | 4932471989 | 4058546298883 | |

^{*}Orders are only possible in master cartons. Order quantities greater than the pack quantity are to be ordered in multiples (i.e. 50, 100, 150...)

Metal cutting discs PRO+

Applications: Great performance in cutting mild steel with medium strength, plain alloy tool steel, concrete reinforcing iron and steel rebar. Characteristics: Efficient cutting properties in combination with high performance.

| | Туре | Disc diameter (mm) | Thickness (mm) | Bore size (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----|-------------|--------------------|----------------|----------------|------------------|---------------------|----------------|---------------|
| 41 | SC 41 / 115 | 115 | 3 | 22.2 | 1 | 25 | 4932451491 | 4002395161324 |
| - | SC 41 / 125 | 125 | 3 | 22.2 | 1 | 25 | 4932451492 | 4002395161331 |
| ı | SC 41 / 180 | 180 | 3 | 22.2 | 1 | 25 | 4932451493 | 4002395161348 |
| | SC 41 / 230 | 230 | 3 | 22.2 | 1 | 25 | 4932451494 | 4002395161362 |
| | | | | | | | | |
| 42 | SC 42 / 115 | 115 | 3 | 22.2 | 1 | 25 | 4932451495 | 4002395161379 |
| | SC 42 / 125 | 125 | 3 | 22.2 | 1 | 25 | 4932451496 | 4002395161393 |
| | SC 42 / 180 | 180 | 3 | 22.2 | 1 | 25 | 4932451497 | 4002395162000 |
| | SC 42 / 230 | 230 | 3 | 22.2 | 1 | 25 | 4932451498 | 4002395162017 |

^{*}Orders are only possible in master cartons. Order quantities greater than the pack quantity are to be ordered in multiples (i.e. 50, 100, 150...)

^{**}available on cutting and grinding discs with thickness 1, 1.5, 1.9 and 6 mm.

Metal cutting discs for chop saws PRO+

Applications: For structural steels, tool steel, cast iron, hard high-grade steels and concrete reinforcing steel bars (rebar). Characteristics: Soft cutting wheel for chop saws.

| | Туре | Disc diameter (mm) | Thickness (mm) | Bore size (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----|-------------|--------------------|----------------|----------------|------------------|---------------------|----------------|---------------|
| 41 | SC 41 / 355 | 355 | 2.5 | 25.4 | 1 | 10 | 4932451505 | 4002395162086 |

*Orders are only possible in master cartons. Order quantities greater than the pack quantity are to be ordered in multiples (i.e. 50, 100, 150...)

Metal grinding discs PRO+

Applications: Sound performance in mild steel and non alloy tool steel.

Characteristics: Provides good lifetime and efficient grinding characteristics.

| | Туре | Disc diameter (mm) | Thickness (mm) | Bore size (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----|-------------|--------------------|----------------|----------------|------------------|---------------------|----------------|---------------|--|
| 27 | SG 27 / 115 | 115 | 6 | 22.2 | 1 | 25 | 4932451501 | 4002395162048 | |
| - 1 | SG 27 / 125 | 125 | 6 | 22.2 | 1 | 25 | 4932451502 | 4002395162055 | |
| | SG 27 / 150 | 150 | 6 | 22.2 | 1 | 10 | 4932471387 | 4058546290153 | |
| | SG 27 / 180 | 180 | 6 | 22.2 | 1 | 10 | 4932451503 | 4002395162062 | |
| 1 | SG 27 / 230 | 230 | 6 | 22.2 | 1 | 10 | 4932451504 | 4002395162079 | |

^{*}Orders are only possible in master cartons. Order quantities greater than the pack quantity are to be ordered in multiples (i.e. 50, 100, 150...)

Stone cutting discs PRO+

Applications: for concrete, masonry products and thin natural stone tiles.

| 42 CC 42 / 115 115 3 22.2 1 25 4932451499 4002395162024 CC 42 / 230 230 3 22.2 1 25 4932451500 4002395162031 | | Туре | Diameter (mm) | Thickness (mm) | Bore size (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|--|------|-------------|---------------|----------------|----------------|------------------|---------------------|----------------|---------------|--|
| CC 42 / 230 230 3 22.2 1 25 4932451500 4002395162031 | 42 | CC 42 / 115 | 115 | 3 | 22.2 | 1 | 25 | 4932451499 | 4002395162024 | |
| | 11.1 | CC 42 / 230 | 230 | 3 | 22.2 | 1 | 25 | 4932451500 | 4002395162031 | |

^{*}Orders are only possible in master cartons. Order quantities greater than the pack quantity are to be ordered in multiples (i.e. 50, 100, 150...)

Thin metal cutting discs - contractor series

Applications: Iron and sulphur free thin cut-off wheels for steel.

Suitable for acid-resistant steel, hardox, high-alloy steel, mild and tool steel. Not suitable for stainless steel.

| | Туре | Diameter (mm) | Thickness (mm) | Bore size (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----|------------------------|---------------------|----------------|----------------|------------------|---------------------|----------------|---------------|
| 41 | SCS 41 / 115 | 115 | 1 | 22.2 | 1 | 50 | 4932451474 | 4002395163250 |
| | Counter display (200 x | SCS 41 / 115 discs) | | | 200 | 1 | 4932451475 | 4002395163267 |
| | SCS 41 / 115 | 115 | 1.5 | 22.2 | 1 | 50 | 4932451476 | 4002395163274 |
| | SCS 41 / 125 | 125 | 1 | 22.2 | 1 | 50 | 4932451477 | 4002395163281 |
| | Counter display (200 x | SCS 41 / 125 discs) | | | 200 | 1 | 4932451478 | 4002395163298 |
| | SCS 41 / 125 | 125 | 1.5 | 22.2 | 1 | 25 | 4932451479 | 4002395163908 |
| | SCS 41 / 230 | 230 | 1.9 | 22.2 | 1 | 25 | 4932451480 | 4002395163915 |

^{*}Orders are only possible in master cartons. Order quantities greater than the pack quantity are to be ordered in multiples (i.e. 50, 100, 150...)

Metal grinding discs - contractor series

Applications: suitable for mild steel. Not suitable for stainless steel.

| 27 SG 27 / 115 115 6 22.2 1 25 4932451481 4002395163922 SG 27 / 125 125 6 22.2 1 25 4932451482 4002395163939 SG 27 / 230 230 6 22.2 1 10 4932451483 4002395163946 | | Туре | Diameter (mm) | Thickness (mm) | Bore size (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-----|-------------|---------------|----------------|----------------|------------------|---------------------|----------------|---------------|
| | 27 | SG 27 / 115 | 115 | 6 | 22.2 | 1 | 25 | 4932451481 | 4002395163922 |
| \$ SG 27/230 230 6 22.2 1 10 4932451483 4002395163946 | 1.0 | SG 27 / 125 | 125 | 6 | 22.2 | 1 | 25 | 4932451482 | 4002395163939 |
| | | SG 27 / 230 | 230 | 6 | 22.2 | 1 | 10 | 4932451483 | 4002395163946 |

^{*}Orders are only possible in master cartons. Order quantities greater than the pack quantity are to be ordered in multiples (i.e. 50, 100, 150...)

Carbide Blade

Carbide blade suitable for cutting wood, plastic and plasterboard.

| Diameter (mm) | Thickness (mm) | Bore size (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|----------------|----------------|------------------|---------------------|----------------|---------------|
| 76 | 1 | 10 | 1 | 1 | 4932464716 | 4058546226619 |



Flap discs

Maximum productivity with CERA TURBO™ 50% faster material removal 2x longer lifetime.

Ceramic hybrid disc: grinds steel, stainless steel, bronze, titanium, aluminium.

Ceramic grain: grinds and finishes in one step! Material removal like grit 40, finishing result like grit 60!

Self trimming backing pad: allows grinding to the last grain!

Natural fibre backing pad: low vibration & noise, no harmful dust.

Highly flexible: perfectly adjusts to working piece.

Low heat development: no metal discolouration, especially on stainless steel.

Made in Germany.

Ideal grinding speed: Ø115 mm: 7.000 - 8.000 rpm. Ø125 mm: 6.000 - 7.000 rpm.

Applications: Ferrous metals, non-ferrous metals (aluminium, titan, etc.), stainless steel V2A (1.4301) / V4A (1.4401).

| | Туре | Disc diameter (mm) | Grit | Bore size (mm) | Backing pad material | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----|--------------|--------------------|------------------|----------------|-------------------------|------------------|---------------------|----------------|---------------|
| 50 | SLC 50 / 115 | 115 | Multigrain 40/60 | 22.2 | Natural fibre | 1 | 10 | 4932430407 | 4002395380688 |
| 1 | SLC 50 / 125 | 125 | Multigrain 40/60 | 22.2 | Natural Fibre | 1 | 10 | 4932430408 | 4002395380695 |
| | | | | | | | | | |

Orders are only possible in master cartons (with 10 x 4932430407). Minimum order quantity is 10 x 4932430407 (= 1 master carton). Order quantities greater than 10 pcs are to be ordered in multiples of 10 pcs (ie. 20, 30, 40, 50 ...).







High quality zirconium grain: longer lifetime on ferrous metals and stainless steel.

Self trimming backing pad: allows grinding on the last grain!

Natural fibre backing pad: low vibration & noise, no harmful dust.

Highly flexible: perfectly adjusts to working piece.

Low heat development: no metal discolouration, especially on stainless steel.

Made in Germany

Ideal grinding speed: Ø115 mm: 7.000 - 8.000 rpm. Ø125 mm: 6.000 - 7.000 rpm.

Applications: Ferrous metals, stainless steel V2A (1.4301) / V4A (1.4401).

| | Туре | Disc diameter (mm) | Grit | Bore size (mm) | Backing pad material | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----|-------------|-----------------------|------|----------------|-------------------------|------------------|---------------------|----------------|---------------|--|
| 50 | SL 50 / 115 | 115 | 80 | 22.2 | Natural Fibre | 1 | 10 | 4932430412 | 4002395380732 | |
| \ \ | SL 50 / 115 | 115 | 120 | 22.2 | Natural Fibre | 1 | 10 | 4932430413 | 4002395380749 | |
| } | SL 50 / 125 | 125 | 80 | 22.2 | Natural Fibre | 1 | 10 | 4932430414 | 4002395380756 | |
| | SL 50 / 125 | 125 | 120 | 22.2 | Natural Fibre | 1 | 10 | 4932430415 | 4002395380763 | |

Orders are only possible in master cartons (with 10 x 4932430412). Minimum order quantity is 10×4932430412 (= 1 master carton). Order quantities greater than 10 pcs are to be ordered in multiples of 10 pcs (ie. 20, 30, 40, 50...).







FIXTEC Nut

FIXTEC: Disc changing in seconds, no extra tools required.

12 seconds from removing the worn disc to fixing a new disc.

Only 8 mm thick, enabling more surface of disc on the material.

Compatible to all manufacturers angle grinders up to \varnothing 150 mm with standard M14 spindle thread.

With integrated keyholes, for removal of the nut with a standard pin spanner in the event of the nut becoming too tight.





| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------|------------------|---------------------|----------------|---------------|
| Counter display | 1 | 12 | 4932352473 | 4002395371327 |
| FIXTEC nut - M14 thread | • | | | |













FIXTEC Nut XL

FIXTEC: Disc changing in seconds, no extra tools required.

For large angle grinders Ø 180 mm to Ø 230.


12 seconds from removing the worn disc to fixing a new disc.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|---------------|---------------------|----------------|---------------|--|
| Counter display | | | | | |
| FIXTEC Nut for 180 & 230 mm angle grinders - M14 thread | 1 | 12 | 4932464610 | 4058546225551 | |











Abrasive discs - Hook & Loop


Perforated sanding discs for wood, metal, paint, lacquer, plaster.

Grit type: fused alumina, half open.

Artificial resin-bonded on special tear resistant paper.


Sanding sheets for random orbital sanders Ø 125 mm - 8 holes

| Grit | Paper size diameter (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|--------------------------|------------------|---------------------|----------------|---------------|
| 40 | 125 | 5 | 1 | 4932367740 | 4002395338610 |
| 60 | 125 | 5 | 1 | 4932367741 | 4002395338627 |
| 80 | 125 | 5 | 1 | 4932367742 | 4002395338634 |
| 120 | 125 | 5 | 1 | 4932367743 | 4002395338641 |
| 180 | 125 | 5 | 1 | 4932367744 | 4002395338658 |
| 240 | 125 | 5 | 1 | 4932367745 | 4002395338665 |
| 40 | 125 | 25 | 1 | 4932371470 | 4002395341870 |
| 60 | 125 | 25 | 1 | 4932371396 | 4002395341665 |
| 80 | 125 | 25 | 1 | 4932371397 | 4002395341672 |
| 120 | 125 | 25 | 1 | 4932371398 | 4002395341689 |
| 180 | 125 | 25 | 1 | 4932371399 | 4002395341696 |
| 240 | 125 | 25 | 1 | 4932371400 | 4002395341702 |



Sanding sheets for random orbital sanders Ø 150 mm - 6 holes

| Grit | Paper size diameter (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|--------------------------|------------------|---------------------|----------------|---------------|
| 40 | 150 | 5 | 1 | 4932371590 | 4002395343171 |
| 60 | 150 | 5 | 1 | 4932371591 | 4002395343188 |
| 80 | 150 | 5 | 1 | 4932371592 | 4002395343195 |
| 120 | 150 | 5 | 1 | 4932371593 | 4002395343201 |
| 180 | 150 | 5 | 1 | 4932371594 | 4002395343218 |
| 240 | 150 | 5 | 1 | 4932371595 | 4002395343225 |
| 40 | 150 | 25 | 1 | 4932371596 | 4002395343232 |
| 60 | 150 | 25 | 1 | 4932371597 | 4002395343249 |
| 80 | 150 | 25 | 1 | 4932371598 | 4002395343256 |
| 120 | 150 | 25 | 1 | 4932371599 | 4002395343263 |
| 180 | 150 | 25 | 1 | 4932371600 | 4002395343270 |
| 240 | 150 | 25 | 1 | 4932371601 | 4002395343287 |



Abrasive sheets - Hook & Loop


Perforated sanding discs for wood, metal, paint, lacquer, plaster.

Grit type: fused alumina, half open.

Artificial resin-bonded on special tear resistant paper.


Sanding sheets for orbital sanders 80 x 133 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 60 | 80 x 133 | 10 | 1 | 4932351666 | 4002395319305 |
| 80 | 80 x 133 | 10 | 1 | 4932351667 | 4002395319312 |
| 120 | 80 x 133 | 10 | 1 | 4932351668 | 4002395319329 |
| 180 | 80 x 133 | 10 | 1 | 4932351669 | 4002395319336 |
| 240 | 80 x 133 | 10 | 1 | 4932351670 | 4002395319343 |



Sanding sheets for orbital sanders 115 x 107 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 60 | 115 x 107 | 10 | 1 | 4932430815 | 4002395384761 |
| 80 | 115 x 107 | 10 | 1 | 4932430816 | 4002395384778 |
| 120 | 115 x 107 | 10 | 1 | 4932430817 | 4002395384785 |
| 240 | 115 x 107 | 10 | 1 | 4932430818 | 4002395384792 |




Abrasive sheets - Clamp type

Perforated sanding discs for wood, metal, paint, lacquer, plaster.

Grit type: fused alumina, half open. Artificial resin-bonded on special tear resistant paper.


Sanding sheets for orbital sanders 93 x 230 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 50 | 93 x 230 | 10 | 1 | 4932305176 | 4002395300006 |
| 80 | 93 x 230 | 10 | 1 | 4932305177 | 4002395300013 |
| 100 | 93 x 230 | 10 | 1 | 4932305178 | 4002395300020 |
| 150 | 93 x 230 | 10 | 1 | 4932305179 | 4002395300037 |



Sanding sheets for orbital sanders 115 x 140 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 60 | 115 x 140 | 10 | 1 | 4932430819 | 4002395384815 |
| 80 | 115 x 140 | 10 | 1 | 4932430820 | 4002395384822 |
| 120 | 115 x 140 | 10 | 1 | 4932430822 | 4002395384846 |
| 240 | 115 x 140 | 10 | 1 | 4932430821 | 4002395384839 |



Abrasive sheets - Hook & Loop

Perforated sanding discs for wood, metal, paint, lacquer, plaster.

Grit type: fused alumina, half open. Artificial resin-bonded on special tear resistant paper.


Sanding sheets for delta sanders 105 x 105 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 60 | 105 x 105 | 5 | 1 | 4932358492 | 4002395324248 |
| 80 | 105 x 105 | 5 | 1 | 4932358493 | 4002395324255 |
| 120 | 105 x 105 | 5 | 1 | 4932358494 | 4002395324262 |
| 180 | 105 x 105 | 5 | 1 | 4932358495 | 4002395324279 |
| 240 | 105 x 105 | 5 | 1 | 4932358496 | 4002395324286 |



Sanding sheets for delta sanders 100 x 147 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 60 | 100 x 147 | 10 | 1 | 4932355140 | 4002395319992 |
| 80 | 100 x 147 | 10 | 1 | 4932355141 | 4002395320004 |
| 120 | 100 x 147 | 10 | 1 | 4932355142 | 4002395320011 |
| 180 | 100 x 147 | 10 | 1 | 4932355143 | 4002395320028 |
| 240 | 100 x 147 | 10 | 1 | 4932355144 | 4002395320035 |



Abrasive belts


Cloth sanding belts for wood, metal, paint, lacqueur, plaster.

Grit type: fused alumina, half open.

Artificial resin-bonded on special fabric.


Sanding belts 75 x 533 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 40 | 75 x 533 | 5 | 1 | 4932312475 | 4002395301263 |
| 60 | 75 x 533 | 5 | 1 | 4932312476 | 4002395301270 |
| 80 | 75 x 533 | 5 | 1 | 4932312477 | 4002395301287 |
| 100 | 75 x 533 | 5 | 1 | 4932312478 | 4002395301294 |
| 150 | 75 x 533 | 5 | 1 | 4932312479 | 4002395301300 |
| 240 | 75 x 533 | 5 | 1 | 4932312480 | 4002395301317 |




Sanding belts 100 x 560 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 40 | 100 x 560 | 3 | 1 | 4932312099 | 4002395300419 |
| 60 | 100 x 560 | 3 | 1 | 4932312100 | 4002395300426 |
| 80 | 100 x 560 | 3 | 1 | 4932312101 | 4002395300433 |
| 100 | 100 x 560 | 3 | 1 | 4932312102 | 4002395300440 |
| 150 | 100 x 560 | 3 | 1 | 4932312103 | 4002395300457 |
| 240 | 100 x 560 | 3 | 1 | 4932312104 | 4002395300464 |




Sanding belts 100 x 610 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 40 | 100 x 610 | 5 | 1 | 4932355066 | 4002395319824 |
| 60 | 100 x 610 | 5 | 1 | 4932355067 | 4002395319831 |
| 80 | 100 x 610 | 5 | 1 | 4932355068 | 4002395319848 |
| 100 | 100 x 610 | 5 | 1 | 4932355069 | 4002395319855 |
| 150 | 100 x 610 | 5 | 1 | 4932355070 | 4002395319862 |
| 240 | 100 x 610 | 5 | 1 | 4932355071 | 4002395319879 |




Sanding belts 100 x 620 mm

| Grit | Paper size A x B (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------|-----------------------|------------------|---------------------|----------------|---------------|
| 40 | 100 x 620 | 5 | 1 | 4932341610 | 4002395304882 |
| 60 | 100 x 620 | 5 | 1 | 4932341611 | 4002395304899 |
| 80 | 100 x 620 | 5 | 1 | 4932341612 | 4002395304905 |
| 100 | 100 x 620 | 5 | 1 | 4932341613 | 4002395304912 |
| 150 | 100 x 620 | 5 | 1 | 4932341614 | 4002395304929 |
| 240 | 100 x 620 | 5 | 1 | 4932341615 | 4002395304936 |



Rotary hammers - System attachments

Rotary hammer chuck adaptors

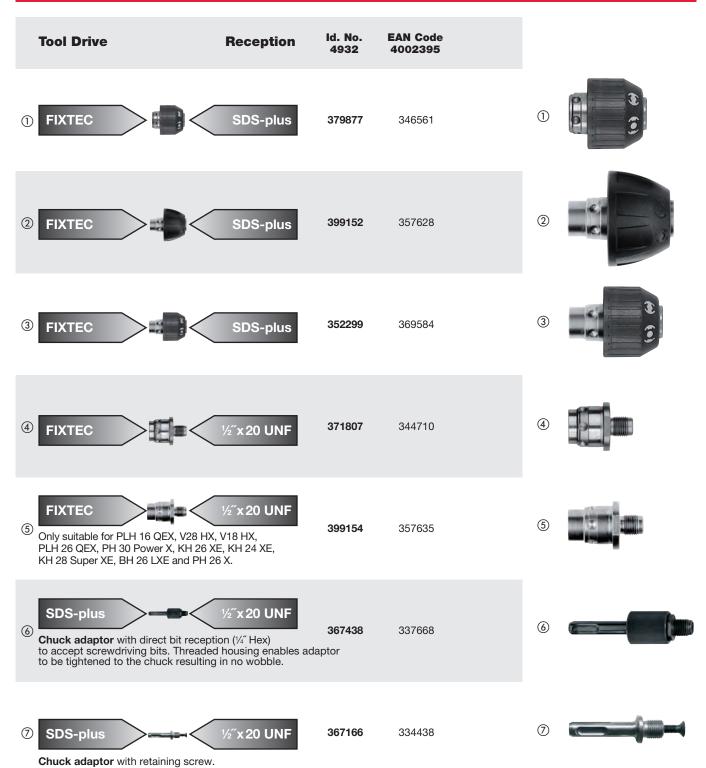

Rotary hammer dust extraction

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | | |
|---|------------------|---------------------|----------------|---------------|------------|---|
| ① Dust collection ring for collecting dust when overhead drilling. Suitable for Ø 5 - 8 mm | 1 | 1 | 4932430912 | 4002395385744 | 1 | 8 |
| Extractor for dust collection on the wall or when overhead drilling. Maximum diameter drill bit Ø 28 mm. Fits to all industrial dust extraction units (universal reception Ø 26 – 41 mm) | 1 | 1 | 4932430446 | 4002395381074 | 2 | |
| Drilling shroud - PHDE72. For drilling and coring from Ø 6 - 72 mm. Brush insert to improve suction and extraction. Brushes to be removed for coring applications. Outlet nozzle: Ø 37 mm outside / Ø 32 mm inside. Replacement sealing lips (2 pcs): 4931448564. Replacement brush: 4931448565 | 1 | 1 | 4932430480 | 4002395381418 | 3 | |
| Drilling shroud - PHDE152. For drilling and dry coring from Ø 25 - 152 mm. Brush insert to improve suction and extraction. | 1 | 1 | 4932471990 | 4058546298890 | (4) | • |
| DE16 - Vac assist universal extractor DE16 unit, 1 x side handle and 3 x neck collars-allows fitting to drills with gear neck from Ø 43 - 59 mm. 2 x drilling nozzles (49902301) | 1 | 1 | 4932430835 | 4002395384976 | | |

SDS-Plus dust trap

Universal fit - Fits ALL SDS-Plus rotary hammer brands and styles.

Fits ALL SDS-Plus drill bits up to 215mm total length.

Fits ALL standard vacuum cleaners.

Clear sleeve for visibility & accuracy.

Collects up to 99% of airborne dust.

Useable with or without vacuum cleaner.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------|------------------|---------------------|----------------|---------------|
| SDS-Plus dust trap | 1 | 1 | 4932464916 | 4058546228613 |
| SDS-Plus dust trap sleeve | 1 | 1 | 4932464917 | 4058546228620 |









SDS-Max Chisel boot

Universal fit - Fits ALL standard SDS-Max rotary hammer brands and styles. Universal fit to pointed and flat chisels up to 400mm length and 25mm tip width.

Slim design for reaching tight areas.

Hose clip adapter for easy attachment to MILWAUKEE® vacuum cleaners.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------|------------------|---------------------|----------------|---------------|
| SDS-Max Chisel boot | 1 | 1 | 4932471041 | 4058546286699 |



Screwdrivers - System attachments

| | Description | Fits corded screwdrivers | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | eryvi— | | |
|------|---|--|------------------|---------------------|----------------|---------------|------------|--------|---------------|----|
| 1) | Drywall sleeve assembly | DWE 4000 Q, DWSE 4000 Q, TKSE 2500 Q, 6790, 6743 | 1 | 1 | 49261036 | 045242185245 | 2 | (AA) | | |
| 2 | Self drill sleeve assembly | TKSE 2500 Q, 6790 | 1 | 1 | 49261082 | 045242185375 | 3 | 27 m | | |
| | 1/4" magnetic bit holder 76 mm | DWE 4000 Q, DWSE 4000 Q, 6743 | 1 | 1 | 48323065 | 045242128600 | | TIV | | |
| | 1/4" magnetic bit holder 76 mm, requires additionally 49261036 sleeve assembly | TKSE 2500 Q, 6790 | 1 | 1 | 48323070 | 045242128655 | 4 | | idennia 📗 | |
| 3 | Hex socket driver set (3pc) Ø 6 / 8 / 10 mm magnetic sockets | TKSE 2500 Q, 6790, TQSE 1200 Q, TQSE 2500 Q, 6580, 6581 | 3 | 1 | 49663004 | 045242207848 | (5) | | 7 | > |
| 4 | Collated attachment for M | 18 FSG | 1 | 1 | 4933459202 | 4002395289974 | 6 | | | |
| (5) | PH2 148 mm screwdriving | bit for M18 FSG | 3 | 1 | 4932459393 | 4058546010546 | | 10 | | 10 |
| 6 | Mag / ring bit holder 75 mi | m for M18 FSG | 1 | 1 | 4932459394 | 4058546010553 | 7 | | 8 | 18 |
| 7 | Offset attachment 1/4" hex I | M12FPDX | 1 | 1 | 4932464481 | 4058546224264 | • | | | |
| 8 | M12 FPDX-RAA Right angle and screwdriving application 90° angle. 12 fixing position | ons in confined spaces. | 1 | 1 | 4932464480 | 4058546224257 | 9 | | | |
| 9 | 13 mm Keyless chuck to s compact percussion drill | uit M12 FPDX sub | 1 | 1 | 4932464479 | 4058546224240 | 10 | | | |
| 10 | Rivet tool nose set | | 4 | 1 | 48540100 | 045242504466 | | - | | , |
| (1) | 152mm Nose extension kit | t- for M12™ rivet tool | 3 | 1 | 48950100 | 045242504459 | 11) | | $\overline{}$ | ě |
| 12 | M12 BDDX-0A offset attac applications - 12 fixing pos | hment for screwdriving sitions | 1 | 1 | 4932430432 | 4002395380930 | | | | • |
| (13) | M12 BDDX-RAA right angle drilling and screwdriving a spaces - 90° angle - 12 fix bit reception | pplications in confined | 1 | 1 | 4932430433 | 4002395380947 | 12 | | 3 | |

Side handles

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| ③ Side handle with depth gauge for all drills and percussion drills with gear neck diameter 43 mm | 1 | 1 | 4932373725 | 4002395352647 |
| Side handle with depth gauge for all drills and percussion drills with a short gear neck (13 mm) of diameter 43 mm | 1 | 1 | 4932364149 | 4002395342198 |



QUIK-LOK[™] cables

| Cable length (m) | Country version | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------|-----------------|------------------|---------------------|----------------|---------------|
| 4 | EU | 1 | 1 | 4932373502 | 4002395351725 |
| 10 | EU | 1 | 1 | 4932373503 | 4002395351732 |
| 4 | CH | 1 | 1 | 4932373504 | 4002395351749 |
| 4 | GB | 1 | 1 | 4932373508 | 4002395351787 |
| 4 | GB | 1 | 1 | 4932373510 | 4002395351800 |
| 6 | EU | 1 | 1 | 49323644831 | 4002395337620 |
| QUIK-LOK cable repair kit | | 1 | 1 | 4931380758 | 4002395714551 |



Universal right angle drill attachment

Converts MILWAUKEE® HDE 13 RQD straight drill to angle drill.

Used extensively for drilling between joists or in tight corners.

Head and handle swivel 360°.

Provides two speeds: 1. Low: speed decreases by 30% torque increases by 50% 2. High: speed increases by 50%

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|------------------------------|------------------|---------------------|----------------|--------------|--|
| Right angle drill attachment | 1 | 1 | 48062871 | 045242088812 | |





Head and handle swivel 360° and can be locked tight in any position.

Keyed chucks

| Chuck jaws open (mm) | Drill reception | Locking device | Safety screw | Rotary drill | Percussion drill | Battery drill | Chuck key | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------|-----------------|----------------|--------------|--------------|------------------|---------------|-----------|------------------|------------------------|----------------|---------------|
| 1.5-13 1 | /2" x 20 | | ~ | ~ | ~ | ~ | Α | 1 | 1 | 4932267980 | 4002395300488 |
| 1.0-16 Ta | per B16 | | | ~ | | | С | 1 | 1 | 4932127010 | 4002395306169 |
| | | | | | | | | | | | |



Keyed chucks - machine specific

| Chuck jaws open (mm) | Drill reception | Fits drill drivers | Safety screw | Chuck key | | Min. order quantity | Article Number | EAN Code |
|-------------------------|-----------------|-----------------------|-----------------|-----------|---|---------------------|-------------------|--------------|
| 1.0-10 | 3/8" x 24 | HDE 6 RQ | ~ | Н | 1 | 1 | 48660817 | 045242155705 |
| 2.0-13 | 1/2" x 20 | HDE 13 RQD | V | K | 1 | 1 | 48661355 | 045242156542 |



¹ Heavy duty and acid resistant, non repairable

Keyed chucks with 1/4" Hex reception

| Chuck jaws open (mm) | Drill reception | Battery drill | Chuck key | | Min. order quantity | | EAN Code | |
|-------------------------|-----------------|---------------|-----------|---|---------------------|------------|---------------|--|
| 1.0-10 | 1/4" Hex | ~ | Α | 1 | 1 | 4932314867 | 4002395300112 | |



Chuck keys

| Description | Туре | Ref. No. | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | |
|---|-----------|----------|------------------|---------------------|----------------|---------------|---|--|
| | Α | S2A | 1 | 1 | 4932221378 | 4002395302765 | | All Property of the Control of the C |
| | В | S2AT | 1 | 1 | 4932310612 | 4002395309177 | | |
| | С | S3T | 1 | 1 | 4932221379 | 4002395306381 | | |
| | D | S14 | 1 | 1 | 4932304684* | 4002395300105 | | |
| ① Chuck key | E | S4 | 1 | 1 | 4932221380 | 4002395306398 | 2 | |
| | G | S2 | 1 | 1 | 4932319995 | 4002395303724 | | |
| | Н | | 1 | 1 | 48663350 | 045242157600 | | |
| | J | | 1 | 1 | 48663240 | 045242157501 | | |
| | K | | 1 | 1 | 48663280 | 045242157556 | | |
| Morse taper No. 3 adaptor for chucks with B16 taper | MT3 - B16 | | 1 | 1 | 4932117042 | 4002395305834 | | |
| Ejector tool DIN 317 size 3 | | | 1 | 1 | 4932604226 | 4002395311248 | | |

Keyless chucks 2 sleeves

| Chuck jaws open (mm) | Reception | Locking device | Safety screw | Rotary drill | Percussion drill | Battery drill | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------|-----------|-------------------|-----------------|-----------------|---------------------|------------------|------------------|------------------------|-------------------|---------------|
| 1.0-10 | ¾″ x 24 | | ~ | ~ | | ~ | 1 | 1 | 4932349457 | 4002395318155 |
| 1.0-10 | ½″ x 20 | ~ | ~ | ~ | ~ | ~ | 1 | 1 | 4932364382 | 4002395337675 |
| 1.5-13 | ½″ x 20 | ~ | | ~ | ~ | ~ | 1 | 1 | 4932376531 | 4002395346332 |
| 1.5-13 | ½″ x 20 | ~ | ~ | ~ | ~ | ~ | 1 | 1 | 4932376533 | 4002395346349 |
| 1.5-13 | ½″ x 20 | ~ | | ~ | ~ | ~ | 1 | 1 | 4932364265* | 4002395334056 |
| 1.5-13 | ½" x 20 | ~ | ~ | V | V | ~ | 1 | 1 | 4932364267* | 4002395334070 |



Keyless chucks for FIXTEC (spindle lock) machines

| Chuck jaws open (mm) | Recep- tion | Locking device | Safety screw | Rotary drill | Percus- sion drill | Battery drill | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------|----------------|-------------------|-----------------|-----------------|--------------------------|------------------|------------------|------------------------|-------------------|---------------|
| 1.0-10 | ¾″ x 24 | ~ | ~ | ~ | ~ | ~ | 1 | 1 | 4932371018 | 4002395339365 |
| 1.0-10 | ½″ x 20 | ~ | ~ | ~ | ~ | ~ | 1 | 1 | 4932372443 | 4002395345458 |
| 1.5-13 | ½″ x 20 | ~ | ~ | ~ | ~ | ~ | 1 | 1 | 4932371913 | 4002395345366 |
| 1.5-13 | %" x 24 | ~ | ~ | ~ | ~ | ~ | 1 | 1 | 4932399492 | 4002395361137 |



^{*} Industrial quality

^{*} while stocks last

Industrial keyless chucks for percussion drills

| Chuck jaws open (mm) | Reception | Locking device | Rotary drill | | Battery drill | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------------|-----------|-------------------|-----------------|---|------------------|------------------|------------------------|-------------------|---------------|
| 1.0-13 | ½″ x 20 | ~ | ~ | ~ | ~ | 1 | 1 | 4932364266 | 4002395334063 |



Keyless chucks - specific tool related chucks

| | ck jaws en (mm) | Reception | Machine specific | | Rotary drill | Safety screw | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|--------------------|-----------|------------------|---|-----------------|-----------------|------------------|------------------------|-------------------|---------------|
| 1 | 1.0-10 | ½″ x 20 | HDE 10 RQX | | | ~ | 1 | 1 | 48661520 | 045242156795 |
| 1 | 1.5-13 | ½″ x 20 | HDE 13 RQX | | | V | 1 | 1 | 42660755 | 4002395891436 |
| 2 | 1.5-13 | FIXTEC | | ~ | ~ | | 1 | 1 | 4932399214 | 4002395358236 |
| 3 | 1.0-10 | FIXTEC | M12 BDDX | | ~ | | 1 | 1 | 4932430444 | 4002395381050 |







Impact wrenches - System attachments

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|--------------|
| Detent pin square type: Socket will not slip off unless detent pin is pressed in | 1 | 1 | 49170405 | 045242178919 |


| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|--------------|
| Rubber Sleeve for M18 CIW | 1 | 1 | 49162754 | 045242320455 |
| Rubber Sleeve for M18 CHIW and M28 CHIW | 1 | 1 | 49162763 | 045242324255 |
| Rubber Sleeve for M18 FMTIWP | 1 | 1 | 49162861 | 045242510146 |
| Rubber Sleeve for M18 FHIWP12 & M18 ONEFHIWP12 | 1 | 1 | 49162766 | 045242506415 |
| Rubber Sleeve for M18 FHIWF12, M18 ONEFHIWF12 & M18 | 1 | 1 | 49162767 | 045242506422 |



Angle grinders - System attachments

| Description | Fits 115 mm angle grinders | Fits 125 mm angle grinders | Fits 150mm angle grinders | Fits 180mm angle grinders a | Fits 230mm ngle grinders | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|--|----------------------------------|----------------------------------|---------------------------------|--------------------------------|-----------------------------|------------------|------------------------|----------------|---------------|--|
| 1 Flange nut M14 | ~ | ~ | ~ | ~ | ~ | 1 | 1 | 4932345628 | 4002395313105 | |
| ② Backing flange | ~ | ~ | ~ | ~ | v | 1 | 1 | 4932449324 | 4002395245185 | |
| ③ Two hole spanner straight | ~ | ~ | ~ | ~ | ~ | 1 | 1 | 4932367712 | 4002395338467 | |
| Open-ended spanner. SW 17/24 | ~ | ~ | ~ | ~ | V | 1 | 1 | 4932345710 | 4002395307722 | |
| ⑤ Cranked two hole spanner for steel wire brushes | | | | V | V | 1 | 1 | 4932371469 | 4002395342181 | |
| Dust protection grille (6) against entry of ground | | V | V | | | 1 | 1 | 4932329397 | 4002395303892 | |
| particles | | | | ✓ | ~ | 2 | 1 | 4932326525 | 4002395303311 | |
| Olds baselle | ~ | ~ | V | | | 1 | 1 | 4932409546 | 4002395370870 | |
| Side handle | | | | ~ | ~ | 1 | 1 | 4931433531 | 4002395889259 | |
| 7) Anti-Vibration side handle | ~ | ~ | ~ | ✓ 1 | | 1 | 1 | 4932399991 | 4002395366507 | |
| / Anti-vibration side naticle | | | | V | ~ | 1 | 1 | 4932399992 | 4002395366514 | |
| Hand protection guard | | | | | | 1 | 1 | 4932378478 | 4002395347353 | |
| Flange nut set. Only for AGV 16- 180 QXC Suitable for WS 2300 (Australia version) Flange nut M14 (4932345629), backing flange (4932371404), large flange nut (4932367952) 3 1 4932351632 4002395321636 | | | | | | | | | | |

¹ Only for AGV 16-180 QXC.



Flexible backing pads

| Description | Bore size (mm) | Diameter (mm) | Fits 115 mm angle grinders | Fits 125 mm angle grinders | Fits 180mm angle grinders | Fits 230mm angle grinders | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|-------------------|------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|------------------|---------------------|----------------|---------------|
| | 14.2 | 110 | ~ | | | | 1 | 1 | 4932345760 | 4002395313488 |
| Flexible backing pad. Complete with flange nut | 14.2 | 125 | | ~ | | | 1 | 1 | 4932345761 | 4002395313495 |
| M14 for all angle grinders | 14.2 | 170 | | | ~ | | 1 | 1 | 4932345758 | 4002395313501 |
| | 22.2 | 170 | | | ~ | | 1 | 1 | 4932352744 | 4002395374021 |
| Replacement flan | ge nut M14 | | ~ | ~ | ~ | ~ | 1 | 1 | 4932345627 | 4002395313112 |



Cutting and grinding dust extraction

| Description | Fits 115 mm Fits angle grinders angle | 125 mm | Fits 180mm angle grinders | Fits 230mm angle grinders | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|--|--------|---------------------------------|---------------------------------|------------------|------------------------|----------------|---------------|
| Dust guard for cutting - DEC 125. 100% tool free connection to Ø 115 - 125 mm AG(V) 12, AGV 15 series and FUEL™ grinders, keyless depth adjustment from 5 - 28 mm. Guide to prevent twisting during cutting. Dust guard fits to the MILWAUKEE® M-Class cleaners with unique "clicksystem" adaptor supplied with the vacuum cleaner | | V | | | 1 | 1 | 4932430467 | 4002395381289 |
| Dust guard for surface conditioning - DEG 125. 100% tool free connection to Ø 125 mm AG(V) 12, AGV 15 series and FUEL** grinders. Supplied with additional loop handle. Removable magnetic front cover to gain access to tight corners and edges when using a cup wheel. Dust guard fits to the MILWAUKEE* M-Class cleaners with unique "click-system" adaptor supplied with the vacuum cleaner. Includes replaceable brush 4931448429 | 3 | V | | | 1 | 1 | 4932430468 | 4002395381296 |
| Dust guard for cutting - DEC 230. 100% tool free connection to Ø 180 - 230mm AG 22, keyless depth adjustment from 5 - 60mm. Solid steel cutting guide to prevent twisting during cutting and flexible cutting line indicator for plunge cuts. Dust guard fits to the MILWAUKEE® M-Class cleaners with unique "click-system" adaptor supplied with the vacuum cleaner. | | | V | V | 1 | 1 | 4932459340 | 4058546010010 |
| Dust guard for cutting - DEC 230 K. 100% tool free connection to Ø 180 - 230mm AG21, AGV 22, AG 24, AGVK 24 and FUEL." grinders. Does not fit to LAG's equipped with autobalancer. Keyless depth adjustment from 5 - 60mm. Solid steel cutting guide to prevent twisting during cutting and flexible cutting line indicator for plunge cuts. Dust guard fits to the MILWAUKEE® M-Class cleaners with unique "click-system" adaptor supplied with the vacuum cleaner. | | | V | V | ī | ī | 4932459341 | 4058546010027 |



Straight die grinders - System attachments

| Description | Fits die grinders | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------|--|------------------|---------------------|----------------|---------------|
| Ø 3 mm collet | DGL 34,DGL 30 E,DG 30 E, PSG 12,PSG 14.4 PP, HD18 SG | 1 | 1 | 4932308974 | 4002395309092 |
| Ø 3 mm collet | M 18FDG-502X | 1 | 1 | 4932471202 | 4058546288303 |
| Ø 6 mm collet | PSG 14.4 PP,HD18 SG, PSG 12,DG 30 E,DGL 30 E, DGL 34 | 1 | 1 | 4932313192 | 4002395302833 |
| Ø 6 mm collet | DG 7 E | 1 | 1 | 4931391453 | 4002395734818 |
| Ø 8 mm collet | DGL 34,DGL 30 E,DG 30 E, PSG 12,PSG 14.4 PP, HD18 SG,V 28 SG | 1 | 1 | 4932313190 | 4002395302840 |
| Ø 8 mm collet | DG 7 E | 1 | 1 | 4931391452 | 4002395734801 |
| Ø 6.35 mm (1/4") collet | DGL 34,DGL 30 E, DG 30 E,PSG 12, PSG 14.4 PP,HD18 SG | 1 | 1 | 4932313194 | 4002395302857 |



Plate shears - System attachments

| Description | Fits plate shears | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------|-------------------|------------------|------------------------|----------------|---------------|
| Piston four sided blade | PPS 12 | 1 | 1 | 4932308837 | 4002395311583 |
| Cutting table blade four | KS 2.5,S 2.5 | 1 | 1 | 4932430171 | 4002395378326 |
| sided blade | PPS 12 | 1 | 1 | 4932308838 | 4002395309085 |
| Centre blade | SMC 1.2 Q | 1 | 1 | 48440150 | 045242140701 |
| Left blade | SMC 1.2 Q | 1 | 1 | 48440160 | 045242140756 |
| Right blade | SMC 1.2 Q | 1 | 1 | 48440170 | 045242140800 |
| Socket wrench 5/32" | SMC 1.2 Q | 1 | 1 | 49960070 | 045242221554 |



Nibblers - System attachments

| Description | Fits nibblers | | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---------------|-----------------------|------------------|---------------------|----------------|---------------|
| Punch | KN 2 | PN 14.4, PN 12,N 2 | 1 | 1 | 4932430172 | 4002395378333 |
| Die | KN 2 | PN 14.4, PN 12,N 2 | 1 | 1 | 4932279565 | 4002395308521 |
| Special die. Especially designed for cutting corrugated steel. Max. cutting capacity 1.5 mm | KN 2 | PN 14.4, PN 12,N 2 | 1 | 1 | 4932279498 | 4002395308514 |





Polishers - System attachments

Premium polishing accessories - Hook & Loop Ø 125 mm

| Description | Diameter (mm) | Height (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | | |
|--|------------------|----------------|------------------|------------------------|----------------|---------------|--------|---------------|
| Polishing backing pad with M14 thread. Very flat design with excellent flexibility. United the very service of the very servi | 125 | | 1 | 1 | 4932430394 | 4002395380558 | 1 | |
| Lambswool polishing disc. 100% natural lambswool. Premium quality with extremely high fibre density for longer lifetime. Integrated soft touch layer guarantees perfect adjustment to flat and curved profiles. For finishing old and fresh paint. Extremely good polishing of temperature sensitive clear lacquers thanks to heat resistant fibres, e.g. polishing car bumper | 135 | 25 | 1 | 1 | 4932430395 | 4002395380565 | ② ③ | |
| Polishing sponge hard. Hard sponge with coarse foam structure. For maximum (3) removal of the reconditioning lacquer, removing deep scratches and polishing weather-beaten lacquer | 145 | 30 | 1 | 1 | 4932430396 | 4002395380572 | 4 | |
| Polishing sponge soft. Extremely soft sponge with fine foam structure. For (4) fine polishing with polishing creams / wax compounds to remove very fine scratches and holograms (swirls) | 145 | 30 | 1 | 1 | 4932430397 | 4002395380589 | | |
| Microfibre polishing cloth. Super-soft premium microfibre polishing cloth for finishing gloss polishing. With good absorption (5) properties perfectly suited for final finishing and removing water spots from sensitive surfaces. Machine-washable with 30° without softener | 400 x 400 | | 1 | 1 | 4932430398 | 4002395380596 | \$ | |
| Polish M-Cut 1500 (250 ml). A coarse 1500 grit polish for removing deep scratches without damaging the lacquer. Suitable for removing dust grains, orange peel texture, (a) lacquer/paints runs and deep scratches. Free of wax, silicone and roxic solvents. Recommended for use with polishing sponge hard (4932430396) and lambswool polishing disc (4932430395) | | | 1 | 1 | 4932430475 | 4002395381364 | 6 | M-CUT 100 |
| Polish M-Wax 6000 (250 ml). Premium high-tech wax with 6000 grit for removing fine scratches and sealing the paintwork in one step. Excellent performance in removing fine scratches / holograms / swirls. Contains the finest Brazilian Carruba wax for long lasting mirror-like shine. Free of silicone. Recommended for use with polishing sponge soft (4932430397) and microfibre polishing cloth (4932430398) | e : | | 1 | 1 | 4932430476 | 4002395381371 | 7 | M. WAX 6000 5 |

Polishing accessories - Hook & Loop Ø 125 / 150 mm

| Description | Diameter (mm) | Height (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | |
|--|------------------|----------------|------------------|------------------------|----------------|---------------|-------------------------------|--|
| Polishing backing pad. Application: Reception of felt / lambswool polishing discs and sponges. (1) Characteristics: M14 thread, break resistant with integrated soft and flexible foam layer, Hook & Loop fixation | 150 | 25 | 1 | 1 | 4932373161 | 4002395347285 | 2 | |
| Felt polishing disc. Application: second polishing / finish of new lacquer work (spray mist 2) and inclusion of dust), non ferrous metals and stainless steel, can also be used with polishing paste. Requires polishing backing | | 50 | 1 | 1 | 4932373163 | 4002395347902 | 34 | |
| Lambswool polishing disc. Finishing high gloss polishing | 150 | 25 | 1 | 1 | 4932373164 | 4002395347926 | 4) | |
| Polishing sponge hard. Polish up of weatherbeaten lacquer, lacquer re-conditioning | 150 | 50 | 1 | 1 | 4932373165 | 4002395347940 | (5) | |
| Polishing sponge soft. (5) Second polish of lacquer, | 125 | 50 | 1 | 1 | 4932373184* | 4002395347957 | | |
| lacquer care | 150 | 50 | 1 | 1 | 4932373186 | 4002395347964 | | |

Polishing accessories - Spot polisher

| Description | Diameter (mm) | Height (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | | |
|---|------------------|----------------|------------------|---------------------|----------------|---------------|-----|--|
| Polishing / Sanding backing pad. Thread: M9 x 0.75. Hook and loop fixation. For use with polishing sponges and abrasive paper | 76 | | 1 | 1 | 4932430488 | 4002395381494 | 1 | |
| Polishing sponge - Hard (yellow). Hard sponge for use with more aggressive polish for removal of deep scratches. Hook and look fixation. For use with polishing / sanding backing pad | 75 | 25 | 1 | 1 | 4932430489 | 4002395381500 | 2 | |
| Polishing sponge - Soft (white). Soft sponge for use with light polish for removal 3 of small scratches. Hook and loop fixation. For use with polishing / sanding backing pad | 80 | 25 | 1 | 1 | 4932430490 | 4002395381517 | 3 | |
| Lambswool polishing pad. Hook and loop fixation. For use with polishing / sanding backing pad | 80 | | 1 | 1 | 4932430838 | 4002395385003 | 4 | |
| Fibre disc backing pad. Thread: M9 x 0.75 to affix to tool. Knurled thread to fix coated abrasives and surface finishing products for coarse sanding applications, such as rust removal. Ideal for sanding small or awkward to reach areas such as pinch welds, door shuts and wheel arches | 46 | | 1 | 1 | 4932430492 | 4002395381531 | (5) | |



Sanders - System attachments

Random orbital sanders

| | Description | Diameter (mm) | Fits random orbital sanders | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | |
|----|--|------------------|-----------------------------------|------------------|---------------------|----------------|---------------|------------------|--|
| C | Base plate Ø 125 mm, 8 holes. Complete with rubber ring as spare | 125 | ROS 125 E | 2 | 1 | 4932430091 | 4002395377527 | | |
| | Base plate Ø 150 mm, 6 holes. Complete with | 150 | TXE 150, ROS 150 E | 2 | 1 | 4932357591 | 4002395343317 | | |
| | rubber ring as spare | | ROS 150 E | | | 4932430145 | 4002395378067 | | |
| | Clean Line System. Frame with dust bag | 125 | ROS 125 E | 1 | 1 | 4931435448 | 4002395889563 | | |
| | with dust bay | 150 | ROS 150 | 1 | 1 | 4931435911 | 4002395874729 | 2 | |
| | Spare paper bags for 4932345544 | | TXE 150, TX 125, ROS 150 E | 5 | 1 | 4931442873 | 4002395247882 | | |
| | Frame holder for dust bag 4932313096 | 125/150 | ROS 150 E, TXE 150 | 1 | 1 | 4931329719 | 4002395610938 | | |
| (| Lambswool polishing disc. Finishing high gloss polishing | 150 | ROS 150, ROS 150 E, TXE 150 | 1 | 1 | 4932373164 | 4002395347926 | | |
| C | Lambswool polishing disc. 100% natural lambswool. Premium quality with extremely high fibre density for longer lifetime. Integrated soft touch layer guarantees perfect adjustment to flat and curved profiles. For finishing old and fresh paint. Extremely good polishing of temperature sensitive clear lacquers thanks to heat resistant fibres, e.g. polishing car bumper | 135 | TX 125, ROS 125 E | 1 | 1 | 4932430395 | 4002395380565 | 3 | |
| (2 | Polishing sponge hard. Polish up of weather- beaten lacquer, lacquer re-conditioning | 150 | TXE 150, ROS 150 E, ROS 150 | 1 | 1 | 4932373165 | 4002395347940 | O | |
| (| Polishing sponge hard. Hard sponge with coarse foam structure. For maximum removal of the recondition-ing lacquer, removing deep scratches and polishing weather- beaten lacquer | 145 | TX 125, ROS 125 E | 1 | Ī | 4932430396 | 4002395380572 | | |
| | | | | | | | | (5) | |



Orbital sanders

| Description | Fits orbital sanders | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---|------------------|---------------------|----------------|---------------|
| ① Spare paper bags for 4932345544 | VSS 20,VSSE 20, VSS 22,VSSE 22, VS 230,VSS 260, VSSE 260 | 5 | 1 | 4931442873 | 4002395247882 |
| Extraction hose Ø 26 mm, 2 4 m. For connection to external extraction system | | 1 | 1 | 4932278824* | 4002395308286 |





Delta sanders

| Extraction hose Ø 26 mm, FS 2 VS 11 D | Description | Fits delta sanders | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 |
|---|---------------------------|--------------------|------------------|------------------------|----------------|---------------|---|
| 4 m. For connection to FS 2, VS II D, 1 1 4932278824* 4002395308286 | | | 1 | 1 | 4932351675 | 4002395320103 | |
| | 2) 4 m. For connection to | | 1 | 1 | 4932278824* | 4002395308286 | 2 |





Belt sanders

| Description | Fits belt sanders | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | |
|--|----------------------------------|------------------|---------------------|----------------|---------------|---|--|
| Extraction hose Ø 26 mm, 4 m. For connection to external extraction system | HBSE 75 S,BS 100 S, BS 100 LE | 1 | 1 | 4932278824* | 4002395308286 | | |
| ② Dust bag (spare) | BS 100 S,BS 100 LE | 1 | 1 | 4932336597 | 4002395311026 | | |
| | | | | | | 2 | |

Bandsaws - System attachments

NEW

Bandsaw covers

Safety - Protects user from injuries by preventing any access to the blade

Jobsite Armor™ durability - Proprietary composite material and crush zone barriers absorb impacts and protect the tool

Protection from debris - Covers protect the blade track and the pulley wheels from debris entering the tool and affecting overall performance

Tool-free installation and removal within second

Extends life of blade by protecting it from external objects

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|---------------|
| Bandsaw Cover for HD18 BS | 1 | 1 | 4932471458 | 4058546290863 |
| ② Bandsaw Cover for M18 CBS125 & BS 125 | 1 | 1 | 4932471459 | 4058546290870 |







Circular saws - System attachments

| Description | Fite alreader come | Pack | Min. order | Article Number | EAN Code | | |
|--|--|----------|------------|----------------|---------------|-----|--------------|
| Description | Fits circular saws | quantity | quantity | Article Number | EAN GODE | | |
| 1) Clean line system | SCS 65 Q,CS 55 | 3 | 1 | 4932346123* | 4002395313266 | 1 | |
| Dust absorbtion connector. | PCS 55 | 1 | 1 | 4932369282 | 4002395338412 | | • |
| Extraction hose Ø 26 mm, ② 4 m. For connection to external extraction system | PCS 55,HK 46 N | 1 | 1 | 4932278824* | 4002395308286 | 2 | |
| Spanner for removing saw blade. | CS 55,HK 46 N, SCS 65 Q,CS 75, PCS 55,HKS 75,HK 75 A, HKS 85,PMS 18 | 1 | 1 | 4932371469 | 4002395342181 | | |
| Parallel guide / fence | SCS 65 Q | 1 | 1 | 49224146 | 045242181896 | | |
| Plastic transport case | SCS 65 Q | 1 | 1 | 201672001 | 4002395840519 | 3 | \ / > |
| 3 Dust extraction hood for MS216 mitre saw | | 1 | 1 | 4932430005 | 4002395376667 | | |
| Guide rail GRU 1400. (4) 1400 mm long. Supplied with carry bag | CS85CBE | 1 | 1 | 4932451265 | 4002395170197 | | |
| Connector Piece | | 1 | 1 | 4932352559 | 4002395372171 | 4 = | |
| Strip and rubber lip assembly set | | 1 | 1 | 4931433774 | 4002395887620 | | |

Planers - System attachments

| Description | All planers 82 & 102mm | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|---------------------------|------------------|---------------------|----------------|---------------|
| Hose connections. Suction sleeve for suction hoses 330552 | ~ | 1 | 1 | 4932316270 | 4002395302017 |
| Parallel guide | V | 1 | 1 | 4932274071* | 4002395300358 |
| Folding rebate depth gauge. For all planers except H500 / PR 1.6-82 models | ~ | 1 | 1 | 4932274069 | 4002395300129 |

Planer blades

| Description | Width (mm) | Fits planers | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------|--------------------|------------------|---------------------|----------------|---------------|
| Tungsten carbide reversible blades. Two | 82 mm | H 500,H 750 | 2 | 1 | 4932273484 | 4002395300150 |
| reversible blades, suitable for soft and hardwoods | 102 mm | HB 750, HBE 800 | 2 | 1 | 4932316243 | 4002395300167 |

Biscuit jointers - System attachments

| Description | Fits biscu | it jointers | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------|-------------|------------------|---------------------|----------------|---------------|
| Cutter | LF 650 | PJ 710 | 1 | 1 | 4932361072 | 4002395326679 |
| Frame holder for dust bag 4931443872 | LF 650 | PJ 710 | 1 | 1 | 4931442872 | 4002395247899 |
| Spare paper bags for 4932345544 | LF 650 | PJ 710 | 5 | 1 | 4931442873 | 4002395247882 |
| Two hole spanner. | LF 650 | PJ 710 | 1 | 1 | 4932345712 | 4002395305551 |



Routers - System attachments

| Description | Fits routers | | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|--|---------------------|---------|------------------|---------------------|----------------|---------------|--|
| Precision collet for rout | er. | | | | | | |
| High rotation accuracy. | | | | | | | |
| Ø 3 mm collet | OFE 710, OFE 630 | OFS 450 | 1 | 1 | 4932308974 | 4002395309092 | |
| Ø 6.35 mm (1/4") collet | 0FE 710, 0FE 630 | 0FS 450 | 1 | 1 | 4932313194 | 4002395302857 | |
| Ø 6 mm collet | 0FE 710, 0FE 630 | 0FS 450 | 1 | 1 | 4932313192 | 4002395302833 | |
| Ø 8 mm collet | OFE 710, OFE 630 | 0FS 450 | 1 | 1 | 4932313190 | 4002395302840 | |
| Trim router off set base attachment, for trimming close to walls | M18 | FTR | 1 | 1 | 4932471946 | 4058546298456 | |





^{*} while stocks last

Outdoor products - System attachments

Chainsaws

| Description | kerf [mm] | Drive Links | Pitch [mm] | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------------|--------------|----------------|---------------|------------------|---------------------|----------------|---------------|
| 16" / 406.4 mm saw chain | 1.1 | 56 | 9.5 (3/8") | 1 | 1 | 4932464873 | 4058546228187 |
| 12" / 304.8 mm saw chain | 1.1 | 45 | 9.5 (3/8") | 1 | 1 | 4932471385 | 4058546290139 |
| 10" / 254 mm saw chain | 1.1 | 40 | 9.5 (3/8") | 1 | 1 | 4932471329 | 4058546289577 |



Line trimmers

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|--------------|
| Trimmer replacement spool (includes 49162712 line) | 1 | 6 | 49162711* | 045242493920 |
| ② 2 mm x 45 m trimmer line | 1 | 12 | 49162712 | 045242493906 |
| 2.4 mm x 76 m trimmer line | 1 | 10 | 49162713 | 045242493913 |
| Auto feed trimmer replacement spool (includes 49162712 line) | 1 | 1 | 49162714 | 045242006458 |









Edger

Replacement edger blade to fit M18 FOPH-EA edger attachment. $20.3 \; \text{cm} \, / \, 203 \text{mm}$ blade length.

| Description | Length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------|-------------|------------------|---------------------|----------------|---------------|
| Edger blade - 1pc | 203 | 1 | 1 | 4932471330 | 4058546289584 |



Press tools - System attachments

Press jaws

| Jaw profile | Fits to following pipe systems suppliers | Nominal size | Tool suitability | Jaw model description | ld. No. 4932- | EAN Code | |
|----------------|--|--------------|---------------------|--|------------------|---------------|---------------------|
| | | M12 | M12 | J12-M12 | 430243 | 4002395379040 | |
| | | M12 | M18 | J18-M12 | 430244 | 4002395379057 | |
| | | M15 | M12 | J12-M15 | 430245 | 4002395379064 | |
| | | M15 | M18 | J18-M15 | 430246 | 4002395379071 | |
| | | M18 | M12 | J12-M18 | 430247 | 4002395379088 | Jaw M profile |
| | Geberit: Mapress | M18 | M18 | J18-M18 | 430248 | 4002395379095 | |
| | VSH: X-Press Eurotubi | M22 | M12 | J12-M22 | 430249 | 4002395379101 | CHES |
| | Raccorderie | M22 | M18 | J18-M22 | 430250 | 4002395379118 | |
| M | Metallique Rubinetterie | M28 | M12 | J12-M28 | 430251 | 4002395379125 | |
| | Bresciane | M28 | M18 | J18-M28 | 430252 | 4002395379132 | Ring jaw M profile |
| | Sanha: Nirosan Pegler Yorkshire | M35 | M12 | J12-M35 | 430253 | 4002395379149 | - |
| | - r ogrer r errierini e | M35 | M18 | J18-M35 | 430254 | 4002395379156 | - |
| | | M42 | M18 | RJ18-M42 (requires ring jaw adaptor RJA-1) | 430255 | 4002395379163 | |
| | | M54 | M18 | RJ18-M54 (requires ring jaw adaptor RJA-1) | 430256 | 4002395379170 | |
| | | V12 | M12 | J12-V12 | 430260 | 4002395379217 | |
| | | V12 | M18 | J18-V12 | 430261 | 4002395379224 | |
| | | V14 | M12 | J12-V14 | 451660 | 4002395273423 | |
| | | V14 | M18 | J18-V14 | 471086 | 4058546287146 | |
| | | V15 | M12 | J12-V15 | 430262 | 4002395379231 | Jaw V profile |
| | | V15 | M18 | J18-V15 | 430263 | 4002395379248 | |
| | | V16 | M12 | J12-V16 | 451661 | 4002395273430 | CHED |
| | | V16 | M18 | J18-V16 | 471087 | 4058546287153 | |
| | | V18 | M12 | J12-V18 | 430264 | 4002395379255 | |
| | Viega | V18 | M18 | J18-V18 | 430265 | 4002395379262 | Ring jaw V profile |
| V | Comap IBP | V22 | M12 | J12-V22 | 430266 | 4002395379279 | |
| | Sanha: Nirosan | V22 | M18 | J18-V22 | 430267 | 4002395379286 | |
| | | V28 | M12 | J12-V28 | 430268 | 4002395379293 | 1 |
| | | V28 | M18 | J18-V28 | 430269 | 4002395379309 | - |
| | | V35 | M12 | J12-V35 | 430270 | 4002395379316 | + |
| | | V35 | | J18-V35 | 430271 | 4002395379323 | - |
| | | V42 | M18 | RJ18-V42 (requires ring jaw adaptor RJA-1) | 430272 | 4002395379330 | |
| | | V54 | M18 | RJ18-V54 (requires ring jaw adaptor RJA-1) | 430273 | 4002395379347 | |
| | | TH14 | M12 | J12-TH14 | 430274 | 4002395379354 | |
| | | TH14 | M18 | J18-TH14 | 430275 | 4002395379361 | |
| | | TH16 | M12 | J12-TH16 | 430276 | 4002395379378 | |
| | | TH16 | M18 | J18-TH16 | 430277 | 4002395379385 | 305 |
| | ALB Comap | TH18 | M12 | J12-TH18 | 430278 | 4002395379392 | Jaw TH profile |
| | Fränkische | TH18 | M18 | J18-TH18 | 430279 | 4002395379408 | 1 |
| TH | Henco (TH14 - TH25 only) | TH20 | M12 | J12-TH20 | 430280 | 4002395379415 | (SEE |
| | IPA Sanha | TH20 | M18 | J18-TH20 | 430281 | 4002395379422 | |
| | Tiemme | TH25 | M12 | J12-TH25 | 430282 | 4002395379439 | 06 |
| | | TH25 | M18 | J18-TH25 | 430355 | 4002395380169 | Ring jaw TH profile |
| | | TH26 | M12 | J12-TH26 | 430283 | 4002395379446 | + |
| | | TH26 | M18 | J18-TH26 | 430284 | 4002395379453 | + |
| | | TH32 | M12 | 0.0 11120 | 100204 | 1002000010400 | - |

Press jaws

| Jaw profile | Fits to following pipe systems suppliers | Nominal size | Tool suitability | Jaw model description | ld. No. 4932- | EAN Code | | |
|-------------|--|-----------------|---------------------|---|------------------|---------------|--|--------------------|
| | | TH32 | M18 | J18-TH32 | 430286 | 4002395379477 | | |
| | ALB | TH40 | M12 | J12-TH40 | 430287 | 4002395379484 | | |
| тн | Comap Fränkische Henco (TH14 - TH25 | TH40 | M18 | RJ18-TH40 (requires ring jaw adaptor RJA-1) | 430288 | 4002395379491 | | |
| 1111 | only) IPA Sanha Tiemme | TH50 | M18 | RJ18-TH50 (requires ring jaw adaptor RJA-1) | 430289 | 4002395379507 | | |
| | Herriffe | TH63 | M18 | RJ18-TH63 (requires ring jaw adaptor RJA-1) | 430290 | 4002395379514 | | |
| | | U14 | M12 | J12-U14 | 430291 | 4002395379521 | | (1) |
| | | U14 | M18 | J18-U14 | 430292 | 4002395379538 | | |
| | | U16 | M12 | J12-U16 | 430293 | 4002395379545 | | |
| | | U16 | M18 | J18-U16 | 430294 | 4002395379552 | | Jaw U profile |
| | ALB | U18 | M12 | J12-U18 | 430295 | 4002395379569 | | oaw o prome |
| | Uponor: Unipipe, Airpipe | U18 | M18 | J18-U18 | 430296 | 4002395379576 | | © CEED |
| | Kann: Kann- therm | U20 | M12 | J12-U20 | 430297 | 4002395379583 | | |
| | Wavin: Press-Systeme | U20 | M18 | J18-U20 | 430298 | 4002395379590 | | 00 |
| | Fränkische: | U25 | M12 | J12-U25 | 430299 | 4002395379606 | | Ring jaw U profile |
| U | Alpex F50 Profi DW | U25 | M18 | J18-U25 | 430300 | 4002395379613 | | |
| | Verbundrohr: Multitubo | U32 | M12 | J12-U32 | 430301 | 4002395379620 | | |
| | IBP: >B< Flex KE Kelit: Kelit | U32 | M18 | J18-U32 | 430302 | 4002395379637 | | |
| | Kelox Jupiter: | U40 | M12 | J12-U40 | 430303 | 4002395379644 | | |
| | Heizsystem | U40 | M18 | RJ18-U40 (requires ring jaw adaptor RJA-1) | 430304 | 4002395379651 | | |
| | | U50 | M18 | RJ18-U50 (requires ring jaw adaptor RJA-1) | 430305 | 4002395379668 | | |
| | | U63 | M18 | RJ18-U63 (requires ring jaw adaptor RJA-1) | 430306 | 4002395379675 | | |
| | | Acz12 | M12 | J12-ACz 12 | 459388 | 4058546010492 | | |
| AC 7 | ACOME MT | Acz16 | M12 | J12-ACz 16 | 459389 | 4058546010508 | | 0 |
| ACZ | 7.00ME MT | Acz20 | M12 | J12-ACz 20 | 459390 | 4058546010515 | | POT |
| | | Acz25 | M12 | J12-ACz 25 | 459391 | 4058546010522 | | |
| | | G16 | M12 | J12-G16 | 464217 | 4058546221621 | | |
| | | G16 | M18 | J18-G16 | 464544 | 4058546224899 | | |
| | | G20 | M12 | J12-G20 | 464218 | 4058546221638 | | |
| | | G20 | M18 | J18-G20 | 464545 | 4058546224905 | | |
| | Cobority Manla 9 | G26 | M12 | J12-G26 | 464219 | 4058546221645 | | |
| G | Geberit: Mepla & Mepla Therm | G26 | M18 | J18-G26 | 464546 | 4058546224912 | | |
| | | G32 | M12 | J12-G32 | 464220 | 4058546221652 | | |
| | | G32 | M18 | J18-G32 | 464547 | 4058546224929 | | _ |
| | | G40 | M12 | J12-G40 | 464221 | 4058546221669 | | |
| | | G40 | M18 | J18-G40 | 464548 | 4058546224936 | | |
| | | G50 | M18 | J18-G50 | 464549 | 4058546224943 | | |
| ① Ring jaw | adaptor | | | RJA-1 | 430307 | 4002395379682 | | Ring jaw adaptor |

Crimpers - System attachments

Crimping dies for M18™ HCCT

| Туре | Form | Cable lug size (mm²) | Imprint code | Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------------|------------|-------------------------|-----------------|-----------------|------------------|---------------------|-------------------|---------------|
| | | 16 | 16 | NF22 Cu 16 | 1 | 1 | 4932451733 | 4002395276837 |
| | | 25 | 25 | NF22 Cu 25 | 1 | 1 | 4932451734 | 4002395276844 |
| | | 35 | 35 | NF22 Cu 35 | 1 | 1 | 4932451735 | 4002395276851 |
| | | 50 | 50 | NF22 Cu 50 | 1 | 1 | 4932451736 | 4002395276868 |
| NF C 20-130 | | 70 | 70 | NF22 Cu 70 | 1 | 1 | 4932451737 | 4002395276875 |
| for copper compression | Hex | 95 | 95 | NF22 Cu 95 | 1 | 1 | 4932451738 | 4002395276882 |
| cable lugs | | 120 | 120 | NF22 Cu 120 | 1 | 1 | 4932451739 | 4002395276899 |
| | | 150 | 150 | NF22 Cu 150 | 1 | 1 | 4932451740 | 4002395277506 |
| | | 185 | 185 | NF22 Cu 185 | 1 | 1 | 4932451741 | 4002395277513 |
| | | 240 | 240 | NF22 Cu 240 | 1 | 1 | 4932451742 | 4002395277520 |
| | | 300 | 300 | NF22 Cu 300 | 1 | 1 | 4932451743 | 4002395277544 |
| | | 6 | 5 | DN22 Cu 6 | 1 | 1 | 4932464861 | 4058546228064 |
| | | 10 | 6 | DN22 Cu 10 | 1 | 1 | 4932464862 | 4058546228071 |
| | | 16 | 8 | DIN22 Cu 16 | 1 | 1 | 4932451744 | 4002395277551 |
| | | 25 | 10 | DIN22 Cu 25 | 1 | 1 | 4932451745 | 4002395277568 |
| DIN 46235 | | 35 | 12 | DIN22 Cu 35 | 1 | 1 | 4932451746 | 4002395277575 |
| for copper | | | | DIN22 Cu 55 | 1 | | 4932451747 | |
| compression | Have | 50 | 14 | | | 1 | | 4002395277582 |
|) cable lugs and | Hex | 70 | 16 | DIN22 Cu 70 | 1 | 1 | 4932451748 | 4002395277599 |
| connectors | | 95 | 18 | DIN22 Cu 95 | 1 | 1 | 4932451749 | 4002395278206 |
| (DIN 46267) | | 120 | 20 | DIN22 Cu 120 | 1 | 1 | 4932451750 | 4002395278213 |
| | | 150 | 22 | DIN22 Cu 150 | 1 | 1 | 4932451751 | 4002395278220 |
| | | 185 | 25 | DIN22 Cu 185 | 1 | 1 | 4932451752 | 4002395278237 |
| | | 240 | 28 | DIN22 Cu 240 | 1 | 1 | 4932451753 | 4002395278244 |
| | | 300 | 32 | DIN22 Cu 300 | 1 | 1 | 4932451754 | 4002395278251 |
| | | 16 | 16 | R22 Cu 16 | 1 | 1 | 4932451755 | 4002395278268 |
| | | 25 | 25 | R22 Cu 25 | 1 | 1 | 4932451756 | 4002395278275 |
| | | 35 | 35 | R22 Cu 35 | 1 | 1 | 4932451757 | 4002395278282 |
| | | 50 | 50 | R22 Cu 50 | 1 | 1 | 4932451758 | 4002395278299 |
| Tubular | | 70 | 70 | R22 Cu 70 | 1 | 1 | 4932451759 | 4002395278909 |
|) cable | Hex | 95 | 95 | R22 Cu 95 | 1 | 1 | 4932451760 | 4002395278916 |
| lugs and connectors | | 120 | 120 | R22 Cu 120 | 1 | 1 | 4932451761 | 4002395278923 |
| | | 150 | 150 | R22 Cu 150 | 1 | 1 | 4932451762 | 4002395278930 |
| | | 185 | 185 | R22 Cu 185 | 1 | 1 | 4932451763 | 4002395278947 |
| | | 240 | 240 | R22 Cu 240 | 1 | 1 | 4932451764 | 4002395278954 |
| | | 300 | 300 | R22 Cu 300 | 1 | 1 | 4932451765 | 4002395278961 |
| | | 16 | 16 | Q22 CU 16 | 1 | 1 | 4932451766 | 4002395278978 |
| Copper solderless | | | | | 1 | | | |
| terminals F | lalf round | 25 | 25 | Q22 CU 25 | | 1 | 4932451767 | 4002395278985 |
| (DIN 46234, | indent | 35 | 35 | Q22 CU 35 | 1 | 1 | 4932451768 | 4002395278992 |
| DIN 46230, DIN 46341) | | 50 | 50 | Q22 CU 50 | 1 | 1 | 4932451769 | 4002395279609 |
| DIN 40041) | | 70 | 70 | Q22 CU 70 | 1 | 1 | 4932451770 | 4002395279616 |
| DIN | | 16/25 | 12 | DIN22 AL 16/25 | 1 | 1 | 4932451771 | 4002395279623 |
| Aluminium for | | 35 | 14 | DIN22 AL 35 | 1 | 1 | 4932451772 | 4002395279630 |
| aluminium | | 50 | 16 | DIN22 AL 50 | 1 | 1 | 4932451773 | 4002395279647 |
| compression | | 70 | 18 | DIN22 AL 70 | 1 | 1 | 4932451774 | 4002395279654 |
|) cable lugs and | Hex | 95/120 | 22 | DIN22 AL 95/120 | 1 | 1 | 4932451775 | 4002395279661 |
| connectors | | 150 | 25 | DIN22 AL 150 | 1 | 1 | 4932451776 | 4002395279678 |
| (DIN 46329, 46267 Part | | 185 | 28 | DIN22 AL 185 | 1 | 1 | 4932451777 | 4002395279685 |
| 1 and 2, DIN | | 240 | 32 | DIN22 AL 240 | 1 | 1 | 4932451778 | 4002395279692 |
| EN 50182) | | 300 | 34 | DIN22 AL 300 | 1 | 1 | 4932451779 | 4002395276905 |
| | | 16 | 8 | L22 Cu 16 | 1 | 1 | 4932464487 | 4058546224325 |
| | | 25 | 10 | L22 Cu 25 | 1 | 1 | 4932464488 | 4058546224332 |
| | | 35 | 12 | L22 Cu 35 | 1 | 1 | 4932464489 | 4058546224349 |
| Connor | | 50 | 14 | L22 Cu 50 | 1 | 1 | 4932464490 | 4058546224356 |
| Copper tubular cable | | 70 | 16 | L22 Cu 70 | 1 | 1 | 4932464491 | 4058546224363 |
|) lugs and | Hex | 95 | 18 | L22 Cu 95 | 1 | 1 | 4932464492 | 4058546224370 |
| connectors like L series | | 120 | 20 | L22 Cu 120 | 1 | 1 | 4932464493 | 4058546224387 |
| IIVE F 901102 | | | | | | | | |
| | | 150 | 22 | L22 Cu 150 | 1 | 1 | 4932464494 | 4058546224394 |
| | | 185 | 25 | L22 Cu 185 | 1 | 1 | 4932464495 | 4058546224400 |




2

3

4











Crimping dies for M18™ HCCT

| | Туре | Form | Cable lug size (mm²) | Imprint code | Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----|----------------------|--------|-------------------------|-----------------|------------------|------------------|------------------------|-------------------|---------------|--|
| | | | 16 | - | RU22 Cu/Al 16 | 1 | 1 | 4932451780 | 4002395276912 | |
| | | | 35/25 | - | RU22 Cu35/AL25 | 1 | 1 | 4932451781 | 4002395276929 | |
| | Pre | | 50/35 | - | RU22 Cu50/AL35 | 1 | 1 | 4932451782 | 4002395276936 | |
| | rounding of | | 70/50 | - | RU22 Cu70/AL50 | 1 | 1 | 4932451783 | 4002395276943 | |
| | triangular shaped | Round | 95/70 | - | RU22 Cu95/AL70 | 1 | 1 | 4932451784 | 4002395276950 | |
| (7) | aluminium | noullu | 120/95 | - | RU22 Cu120/AL95 | 1 | 1 | 4932451785 | 4002395276967 | |
| | and copper | | 150/120 | - | RU22 Cu150/AL120 | 1 | 1 | 4932451786 | 4002395276974 | |
| | conductors | | 185/150 | - | RU22 Cu185/AL150 | 1 | 1 | 4932451787 | 4002395276981 | |
| | | | 240/185 | - | RU22 Cu240/AL185 | 1 | 1 | 4932451788 | 4002395276998 | |
| | | | 300/240 | - | RU22 Cu300/AL240 | 1 | 1 | 4932451789 | 4002395277605 | |
| | | | 10 | - | C22 Cu 10/C4 | 1 | 1 | 4932464863 | 4058546228088 | |
| | C Ton | Ougl | 16 | - | C22 Cu 16/C5 | 1 | 1 | 4932464864 | 4058546228095 | |
| 8 | C Tap | 0val | 25 | - | C22 Cu 25/C6 | 1 | 1 | 4932464865 | 4058546228101 | |
| | | | 35 | - | C22 Cu 50/C8C9 | 1 | 1 | 4932464866 | 4058546228118 | |
| 9 | Crimping die | e box | | | | 1 | 1 | 4932459339 | 4058546010003 | |






9




Crimping dies for M18™ HCCT 109/42

| | Туре | Form | Cable lug size (mm²) | Imprint code | Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----|---------------------------|-----------|-------------------------|-----------------|--------------|------------------|---------------------|-------------------|---------------|
| | | | 16 | 16 | NF13 Cu 16 | 1 | 1 | 4932459453 | 4058546011147 |
| | | | 25 | 25 | NF13 Cu 25 | 1 | 1 | 4932459454 | 4058546011154 |
| | | | 35 | 35 | NF13 Cu 35 | 1 | 1 | 4932459455 | 4058546011161 |
| | | | 50 | 50 | NF13 Cu 50 | 1 | 1 | 4932459456 | 4058546011178 |
| | NF C 20-130 | | 70 | 70 | NF13 Cu 70 | 1 | 1 | 4932459457 | 4058546011185 |
| _ | for copper | Hex | 95 | 95 | NF13 Cu 95 | 1 | 1 | 4932459458 | 4058546011192 |
| (1) | compression | нех | 120 | 120 | NF13 Cu 120 | 1 | 1 | 4932459459 | 4058546011208 |
| | cable lugs | | 150 | 150 | NF13 Cu 150 | 1 | 1 | 4932459460 | 4058546011215 |
| | | | 185 | 185 | NF13 Cu 185 | 1 | 1 | 4932459461 | 4058546011222 |
| | | | 240 | 240 | NF13 Cu 240 | 1 | 1 | 4932459462 | 4058546011239 |
| | | | 300 | 300 | NF13 Cu 300 | 1 | 1 | 4932459463 | 4058546011246 |
| | | | 400 | 400 | NF13 Cu 400 | 1 | 1 | 4932459464 | 4058546011253 |
| | | | 16 | 8 | DIN13 Cu 16 | 1 | 1 | 4932459465 | 4058546011260 |
| | | | 25 | 10 | DIN13 Cu 25 | 1 | 1 | 4932459466 | 4058546011277 |
| | | | 35 | 12 | DIN13 Cu 35 | 1 | 1 | 4932459467 | 4058546011284 |
| | DIN 46235 | | 50 | 14 | DIN13 Cu 50 | 1 | 1 | 4932459468 | 4058546011291 |
| | for copper compression | | 70 | 16 | DIN13 Cu 70 | 1 | 1 | 4932459469 | 4058546011307 |
| 2 | cable | Hex | 95 | 18 | DIN13 Cu 95 | 1 | 1 | 4932459470 | 4058546011314 |
| _ | lugs and connectors | | 120 | 20 | DIN13 Cu 120 | 1 | 1 | 4932459471 | 4058546011321 |
| | (DIN 46267) | | 150 | 22 | DIN13 Cu 150 | 1 | 1 | 4932459472 | 4058546011338 |
| | | | 185 | 25 | DIN13 Cu 185 | 1 | 1 | 4932459473 | 4058546011345 |
| | | | 240 | 28 | DIN13 Cu 240 | 1 | 1 | 4932459474 | 4058546011352 |
| | | | 300 | 32 | DIN13 Cu 300 | 1 | 1 | 4932459475 | 4058546011369 |
| | | | 16 | 16 | R13 Cu 16 | 1 | 1 | 4932459494 | 4058546011550 |
| | | | 25 | 25 | R13 Cu 25 | 1 | 1 | 4932459495 | 4058546011567 |
| | | | 35 | 35 | R13 Cu 35 | 1 | 1 | 4932459496 | 4058546011574 |
| | | | 50 | 50 | R13 Cu 50 | 1 | 1 | 4932459497 | 4058546011581 |
| | Tubular | | 70 | 70 | R13 Cu 70 | 1 | 1 | 4932459498 | 4058546011598 |
| | cable | U | 95 | 95 | R13 Cu 95 | 1 | 1 | 4932459499 | 4058546011604 |
| 3 | lugs and | Hex | 120 | 120 | R13 Cu 120 | 1 | 1 | 4932459500 | 4058546011611 |
| | connectors | | 150 | 150 | R13 Cu 150 | 1 | 1 | 4932459501 | 4058546011628 |
| | | | 185 | 185 | R13 Cu 185 | 1 | 1 | 4932459502 | 4058546011635 |
| | | | 240 | 240 | R13 Cu 240 | 1 | 1 | 4932459503 | 4058546011642 |
| | | | 300 | 300 | R13 Cu 300 | 1 | 1 | 4932459504 | 4058546026769 |
| | | | 400 | 400 | R13 Cu 400 | 1 | 1 | 4932459505 | 4058546026776 |
| | | | 16 | 16 | Q13 CU 16 | 1 | 1 | 4932459477 | 4058546011383 |
| | Copper | | 25 | 25 | Q13 CU 25 | 1 | 1 | 4932459478 | 4058546011390 |
| | solderless terminals H | alf round | 35 | 35 | Q13 CU 35 | 1 | 1 | 4932459479 | 4058546011406 |
| (4) | (DIN 46234, | indent | 50 | 50 | Q13 CU 50 | 1 | 1 | 4932459480 | 4058546011413 |
| | DIN 46230, DIN 46341) | | 70 | 70 | Q13 CU 70 | 1 | 1 | 4932459481 | 4058546011420 |
| | Dii 40041) | | 95 | 95 | Q13 CU 95 | 1 | 1 | 4932459482 | 4058546011437 |









Crimping dies for M18™ HCCT 109/42

| | Туре | Form | Cable lug size (mm²) | Imprint code | Description | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | DIN13 AL |
|----|-------------------------------|----------------|-------------------------|-----------------|------------------------------|---------------|---------------------|----------------|---------------|---------------|--|
| | DIN | | 16/25 | 12 | DIN13 AL 16/25 | 1 | 1 | 4932459506 | 4058546026783 | | |
| | Aluminium for | | 35 | 14 | DIN13 AL 35 | 1 | 1 | 4932459507 | 4058546026790 | | |
| | aluminium | | 50 | 16 | DIN13 AL 50 | 1 | 1 | 4932459508 | 4058546026806 | | |
| | compression | | 70 | 18 | DIN13 AL 70 | 1 | 1 | 4932459509 | 4058546026813 | | |
|) | cable lugs and | Hex | 95/120 | 22 | DIN13 AL 95/120 | 1 | 1 | 4932459510 | 4058546026820 | | OS TA ELN |
| | connectors | | 150 | 25 | DIN13 AL 150 | 1 | 1 | 4932459511 | 4058546026837 | | 17 611 |
| | (DIN 46329, | | 185 | 28 | DIN13 AL 185 | 1 | 1 | 4932459512 | 4058546026844 | | |
| | 46267 Part 1 und 2, DIN | | 240 | 32 | DIN13 AL 240 | 1 | 1 | 4932459513 | 4058546026851 | 2 | |
| | EN 50182) | | 300 | 34 | DIN13 AL 300 | 1 | 1 | 4932459514 | 4058546026868 | | L13 CU 5 |
| | | | 16 | 8 | L13 Cu 16 | 1 | 1 | 4932464500 | 4058546224455 | | |
| | | | 25 | 10 | L13 Cu 25 | 1 | 1 | 4932464501 | 4058546224462 | | |
| | | | 35 | 12 | L13 Cu 35 | 1 | 1 | 4932464502 | 4058546224479 | | |
| | | | 50 | 14 | L13 Cu 50 | 1 | 1 | 4932464503 | 4058546224486 | | |
| | Copper tubular cable | | 70 | 16 | L13 Cu 70 | 1 | 1 | 4932464504 | 4058546224493 | | 13 CU 50 |
| 2) | lugs and | Hex | 95 | 18 | L13 Cu 95 | 1 | 1 | 4932464505 | 4058546224509 | | |
| | connectors | | 120 | 20 | L13 Cu 120 | 1 | 1 | 4932464506 | 4058546224516 | 3 | |
| | like L series | | 150 | 22 | L13 Cu 150 | 1 | 1 | 4932464507 | 4058546224523 | - | 13 Cu50/ |
| | | | 185 | 25 | L13 Cu 185 | 1 | 1 | 4932464508 | 4058546224530 | | (Milwarkes |
| | | | 240 | 28 | L13 Cu 240 | 1 | 1 | 4932464509 | 4058546224547 | | |
| | | | 300 | 32 | L13 Cu 300 | 1 | 1 | 4932464510 | 4058546224554 | | 1 |
| | | | 16 | - | RU13 Cu/Al16 | 1 | 1 | 4932459483 | 4058546011444 | | Y |
| | | | 35/25 | - | RU13 Cu35/AL25 | 1 | 1 | 4932459484 | 4058546011451 | | 182 |
| | | | 50/35 | - | RU13 Cu50/AL35 | 1 | 1 | 4932459485 | 4058546011468 | | S Cu50/A |
| | Pre rounding | | 70/50 | - | RU13 Cu70/AL50 | 1 | 1 | 4932459486 | 4058546011475 | | |
| | of triangular shaped | | 95/70 | - | RU13 Cu95/AL70 | 1 | 1 | 4932459487 | 4058546011482 | 4 | |
| | aluminium | Round | 120/95 | - | RU13 Cu120/AL95 | 1 | 1 | 4932459488 | 4058546011499 | 4) | |
| | and copper | | 150/120 | | RU13 Cu150/AL120 | 1 | 1 | 4932459489 | 4058546011505 | | EH13 Cu |
| | conductors | | 185/150 | | RU13 Cu185/AL150 | 1 | 1 | 4932459490 | 4058546011512 | | Milande |
| | | | 240/185 | - | RU13 Cu240/AL185 | 1 | 1 | 4932459491 | 4058546011529 | | |
| | | | 300/240 | - | RU13 Cu300/AL240 | 1 | 1 | 4932459492 | 4058546011536 | | |
| | | | 16 | | AEH13 Cu 16 | 1 | 1 | 4932459515 | 4058546026875 | | 1 |
| | | | 25 | - | AEH13 Cu 25 | 1 | 1 | 4932459516 | 4058546026882 | | |
| | | | 35 | | AEH13 Cu 35 | 1 | 1 | 4932459517 | 4058546026899 | | |
| | | | 50 | | AEH13 Cu 50 | 1 | 1 | 4932459517 | 4058546026995 | (5) | |
| | | Tues | 70 | - | AEH13 Cu 30 | 1 | 1 | 4932459519 | 4058546026912 | $\overline{}$ | 12 Cm |
| 9 | Ferruls | Trape- zoid | 95 | - | AEH13 Cu 70 | 1 | 1 | 4932459519 | 4058546026912 | | 619 903 |
| | | 2010 | 120 | - | AEH13 Cu 120 | 1 | 1 | 4932459520 | 4058546026936 | | |
| | | | 150 | - | AEH13 Cu 120 AEH13 Cu 150 | 1 | 1 | 4932459521 | 4058546026943 | | |
| | | | | | | 1 | | 4932459522 | | | |
| | | | 185 | - | AEH13 Cu 185 | | 1 | | 4058546026950 | | 3 Cu 50 |
| | | | 240 | - | AEH13 Cu 240 | 1 | • | 4932459524 | 4058546026967 | | |
| | | | 16 | - | C13 Cu 16 | 1 | 1 | 4932459525 | 4058546026974 | | |
| | | | 25 | - | C13 Cu 25 | 1 | 1 | 4932459526 | 4058546026981 | 6 | HAH13 Cu |
| | | | 35 | - | C13 Cu 35 | 1 | 1 | 4932459527 | 4058546026998 | ٥ | Aparto Gu |
| | 0. | | 50 | - | C13 Cu 50 | 1 | 1 | 4932459528 | 4058546027001 | | |
|) | C taps | 0val | 70 | - | C13 Cu 70 | 1 | 1 | 4932459529 | 4058546027018 | | The state of the s |
| | | | 10 | - | C13 Cu 10 | 1 | 1 | 4932459530 | 4058546027025 | | |
| | | | 10-35 | - | C13 Cu 10-35 | 1 | 1 | 4932459531 | 4058546027032 | | |
| | | | 25-50 | - | C13 Cu 25-50 | 1 | 1 | 4932459532 | 4058546027049 | | 0 |
| | | | 35-70 | - | C13 Cu 35-70 | 1 | 1 | 4932459533 | 4058546027056 | | PENS EIH |
| | | | 70 | - | HAH13 Cu 70 | 1 | 1 | 4932459534 | 4058546027063 | | |
| | H clamps | Oval | 95 | - | HAH13 Cu 95 | 1 | 1 | 4932459535 | 4058546027070 | 7 | SP13 Cu s |
| | | | 120 | - | HAH13 Cu 120 | 1 | 1 | 4932459536 | 4058546027087 | _ | |
| | Double | | 2x50 | - | DP13 Cu 2x50 | 1 | 1 | 4932459537 | 4058546027094 | | |
| 0 | press cable | Oval | 2x70 | - | DP13 Cu 2x70 | 1 | 1 | 4932459538 | 4058546027100 | | |
| | shoes | | 2x95 | - | DP13 Cu 2x95 | 1 | 1 | 4932459539 | 4058546027117 | | |
| | Crimping die b separately) | box for N | 118 HCCT109/ | 42 crimpe | er (dies to be bought | 1 | 1 | 4932464211 | 4058546221560 | | |



8

Crimp die kits

NEW

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | 1) | 4 |
|---|------------------|---------------------|----------------|---------------|-------|--------|
| DIN22 Cu die kit for M18 HCCT (1) Die storage box incl. 11 dies - 16, 25, 35, 50, 70, 95, 120, 150, 185, 240 & 300 mm² | 11 | 1 | 4932471997 | 4058546298968 | 00000 | 20000 |
| DIN22 AI die kit for M18 HCCT Die storage box incl. 9 dies - 16/25, 35, 50, 70, 95/120, 150, 185, 240 & 300 mm² | 9 | 1 | 4932471998 | 4058546298975 | 2 | 5 |
| R22 Cu die kit for M18 HCCT (3) Die storage box incl. 11 dies - 16, 25, 35, 50, 70, 95, 120, 150, 185, 240 & 300 mm ² | 11 | 1 | 4932471999 | 4058546298982 | | |
| DIN13 Cu die set for M18 HCCT109/42 (4) Die storage box incl. 11 dies - 16, 25, 35, 50, 70, 95, 120, 150, 185, 240 & 300 mm² | 11 | 1 | 4932472000 | 4058546323967 | | 0000 |
| DIN13 Al die set for M18 HCCT109/42 (5) Die storage box incl. 9 dies - 16/25, 35, 50, 70, 95/120, 150, 185, 240 & 300 mm² | 9 | 1 | 4932472001 | 4058546323974 | 3 | 6 |
| R13 Cu die set for M18 HCCT109/42 (a) Die storage box incl. 11 dies - 16, 25, 35, 50, 70, 95, 120, 150, 185, 240 & 300 mm² | 11 | 1 | 4932472002 | 4058546323981 | 6000 | 900000 |

Knockout punch - System attachments

Knockout punch and dies

Suitable for mild steel and aluminium up to a thickness of 3 mm. Also suitable for stainless steel max. $2.5\,\mathrm{mm}$.





| | | | | | | Punch | | Die | |
|------------------|-------------------------------------|-----------------------------|------------------|---------------------|-------------------|---------------|----------------|---------------|--|
| Diameter (mm) | Standard PG size | Standard ISO metric size | Pack quantity | Min. order quantity | Article Number | EAN Code | Article Number | EAN Code | |
| 16.2 | | M 16 | 1 | 1 | 4932430841 | 4002395385034 | 4932430913 | 4002395385751 | |
| 20.4 | PG 13.5 | M 20 | 1 | 1 | 4932430842 | 4002395385041 | 4932430914 | 4002395385768 | |
| 22.5 | PG 16 ¹ / ₂ " | | 1 | 1 | 4932430843 | 4002395385058 | 4932430915 | 4002395385775 | |
| 25.4 | | M 25 | 1 | 1 | 4932430844 | 4002395385065 | 4932430916 | 4002395385782 | |
| 28.3 | PG 213/4" | | 1 | 1 | 4932430845 | 4002395385072 | 4932430917 | 4002395385799 | |
| 32.5 | | M 32 | 1 | 1 | 4932430846 | 4002395385089 | 4932430918 | 4002395385805 | |
| 40.5 | | M 40 | 1 | 1 | 4932430847 | 4002395385096 | 4932430919 | 4002395385812 | |
| 50.5 | | M 50 | 1 | 1 | 4932430848 | 4002395385102 | 4932430920 | 4002395385829 | |
| 63.5 | | M 63 | 1 | 1 | 4932430849 | 4002395385119 | 4932430921 | 4002395385836 | |

Draw stud bolt 49162680 (for 16.2 and 20.4 mm) \emptyset 11,1 mm: requires pre-drilling with \emptyset 11.3 - 11.5 mm drill bit / step drill. Draw stud bolt 49162681 \emptyset 19 mm: requires pre-drilling with \emptyset 19.5 - 20 mm drill bit / step drill.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|--------------|
| Adaptor to allow the MILWAUKEE® tool to use competitors punches and dies ie. Klauke®, Greenlee® and Alfra® | 1 | 1 | 49162685 | 045242337965 |

Expansion tools - System attachments

Expander heads

| Description | Pipe diameter (mm) | Pipe wall thickness (mm) | Pipe pressure (bar) | Suitable | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------------|--------------------------|--------------------------------|---------------------------|------------|------------------|---------------------|-------------------|---------------|
| PXPH9-144/8 | 9.9 | 1.1 | 4/8 | M12, M18 | 1 | 1 | 4932430102 | 4002395377633 |
| PXPH12I-14 | 12 | 1.7/ 1.8/ 2 | 6-10 | M12, M18 | 1 | 1 | 4932352716 | 4002395373741 |
| PXPH15N-14 | 14 / 15 | 2.5 | 6-10 | M12, M18 | 1 | 1 | 4932352727 | 4002395373857 |
| PXPH16I-1406 | 16 | 1.5/ 1.8 | 6 | M12, M18 | 1 | 1 | 4932430103 | 4002395377640 |
| PXPH16I-1410 | 16 | 1.8/ 2.0/ 2.2 | 10 | M12, M18 | 1 | 1 | 4932352717 | 4002395373758 |
| PXPH18N-14 | 17 / 18 | 2.5 | 6-10 | M12, M18 | 1 | 1 | 4932352728 | 4002395373864 |
| PXPH20I-1406 | 20 | 1.9/ 2.0/ 2.3 | 6, (8 bar - Ø 2.3 mm) | M12, M18 | 1 | 1 | 4932352718 | 4002395373765 |
| XPH20I-1410 | 20 | 2.8 | 10 | M12, M18 | 1 | 1 | 4932352719 | 4002395373772 |
| XPH20I-2506 | 20 | 1.9/ 2.0/ 2.3 | 6, (8 bar - Ø 2.3 mm) | M18 | 1 | 1 | 4932352733 | 4002395373918 |
| PXPH20I-2510 | 20 | 2.8 | 10 | M18 | 1 | 1 | 4932352748 | 4002395374069 |
| (PH22N-14 | 22 | 3 | 6-10 | M12, M18 | 1 | 1 | 4932352729 | 4002395373871 |
| PH25I-1406 | 25 | 2.3 | 6 | M12, M18 | 1 | 1 | 4932352720 | 4002395373789 |
| PH25I-1410 | 25 | 3.5 | 10 | M12, M18 | 1 | 1 | 4932352721 | 4002395373796 |
| (PH25I-2506 | 25 | 2.3 | 6 | M18 | 1 | 1 | 4932352722 | 4002395373802 |
| (PH25I-2510 | 25 | 3.5 | 10 | M18 | 1 | 1 | 4932352749 | 4002395374076 |
| (PH28N-14 | 28 | 4 | 6-10 | M12, M18 | 1 | 1 | 4932352730 | 4002395373888 |
| (PH32I-1406 | 32 | 2.9 | 6 | M12, M18 | 1 | 1 | 4932352723 | 4002395373819 |
| (PH32I-25 | 32 | 2.9/ 4.4 | 6-10 | M18 | 1 | 1 | 4932352724 | 4002395373826 |
| (PH40I-2506 | 40 | 3.7 | 6 | M18 | 1 | 1 | 4932352725 | 4002395373833 |
| (PH 40I - 5606 | 40 | 3.7 | 6-10 | M18 BLPXPL | 1 | 1 | 4932451396 | 4002395160884 |
| PH 50I - 5606 | 50 | 4.6 | 6-10 | M18 BLPXPL | 1 | 1 | 4932451397 | 4002395160891 |
| KPH 63I - 5606 | 63 | 5.8 | 6-10 | M18 BLPXPL | 1 | 1 | 4932451398 | 4002395158102 |
| KPH 75I - 5606 | 75 | 6.8 | 6-10 | M18 BLPXPL | 1 | 1 | 4932451399 | 4002395158119 |
| rease ube contents 50 g | . For lubric | ation of cone | e and expan | der heads | 1 | 1 | 4932352726 | 4002395373840 |





Dies for M18BLTRC threaded rod cutter

NEW

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------------------|------------------|------------------------|----------------|---------------|
| Dies for M18BLTRC threaded rod cutter | 2 | 1 | 4932471372 | 4058546290009 |





Hydraulic pump - System attachments

NEW

1.8 meter controller extension cord

Compatible with M18™ FORCE LOGIC™ hydraulic pump

IP 67 ingress protection for reliable use in the elements

Male-female connectors for interconnectable extension up to 7.3 m of length

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------------|------------------|---------------------|----------------|---------------|
| 1.8 meter controller extension cord | 1 | 1 | 49122775 | 4058546326487 |



Hydraulic oil

1 I accessory oil for M18 HUP700 hydraulic pump

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------------|------------------|---------------------|----------------|---------------|
| Replacement oil M18 HUP700 | 1 | 1 | 4932472004 | 4058546324001 |

Bucket hanger

Compatible with M18[™] FORCE LOGIC[™] hydraulic pump

Extendable bar & rubber bumpers allow for use with most existing buckets & steel baskets

Symmetrical lift ring design enable use from both sides of the hanger

Keeps pump in ideal, level operating position while freeing up space inside the bucket

Standard size lift rings allow for use with existing bucket hooks

Open frame design enables the user to open the pump battery door while still resting in the hanger

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------|------------------|---------------------|----------------|---------------|
| Bucket hanger for M18 HUP700 | 1 | 1 | 49122776 | 4058546326494 |



Cable cutters - System attachments

Cable Cutter Blades suitable for M18™ HCCAC / M18™ HCCS

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 |
|--|------------------|---------------------|----------------|---------------|---|
| ① ACSR Aluminium steel reinforced cable cutting jaw including blades | 1 | 1 | 49162773 | 045242350070 | |
| ② ACSR Aluminium steel reinforced cable cutting blades | 1 | 1 | 48440412 | 045242355235 | |
| ① Cu/Al standard copper & aluminium cable cutting jaw including blades | 1 | 1 | 4932430839 | 4002395385010 | |
| Replacement cable cutter blades for copper and aluminium. | 1 | 1 | 4932464498 | 4058546224431 | 2 |
| Armored cable cutting Jaw for M18 HCC | 1 | 1 | 4932464867 | 4058546228125 | 1 |
| Replacement SWA blade for M18 HCC | 1 | 1 | 4932464868 | 4058546228132 | |
| 1) FSW fine stranded wire cutting jaw including blades | 1 | 1 | 49162778 | 045242505722 | |
| FSW fine stranded wire cutting blades | 1 | 1 | 48442778 | 045242505739 | |
| ① EHS guy wire/steel wire cutting jaw including blades | 1 | 1 | 49162777 | 045242505449 | 4 |
| ② EHS guy wire/steel wire cutting blades | 1 | 1 | 48442777 | 045242505456 | |





Cable cutting blades suitable for M18 HCCT

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| Cu/Al standard Copper & Aluminum cable cutting jaw | 1 | 1 | 4932464497 | 4058546224424 |



Cable cutter blades for underground cutter M18 HCC75

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------------|---------------|---------------------|----------------|--------------|
| Underground cutter blade M18 HCC75 | 1 | 1 | 49162774 | 045242486663 |



Cable cutter blades for M18 HCC45

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|------------------|---------------------|----------------|--------------|
| ACSR blade M18 HCC45 | 1 | 1 | 49162775 | 045242486632 |



Pipe cutter / Cable cutter blades for M12™

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | 00 |
|--|------------------|---------------------|----------------|---------------|---|--|
| Pipe cutter wheels. Suitable for copper pipe. Not suitable for plastic or stainless steel pipe | 2 | 1 | 48380010 | 045242159710 | • | 00 |
| ② Cable cutter blade | 1 | 1 | 4932430070 | 4002395377312 | | The same of the sa |
| PEX cutter blade for C12 PPC | 1 | 1 | 4931441978 | 4002395179268 | 2 | |

Drain cleaning - System attachments

M12™ drain cleaner accessories

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|--------------|
| ① Ø 8 mm x 7.6 m spiral, bulb auger | 1 | 1 | 48532571 | 045242364213 |
| ② Ø 8 mm x 7.6 m spiral, pivot bulb auger | 1 | 1 | 48532572 | 045242364206 |
| Ø 6 mm x 7.6 m spiral, bulb auger | 1 | 1 | 48532573 | 045242471270 |
| 0 6 mm x 7.6 m spiral, pivot bulb auger | 1 | 1 | 48532574 | 045242471287 |
| Ø 8 mm x 7.6 m spiral, bulb auger with drum | 1 | 1 | 48532581 | 045242480586 |
| 4) Ø 8 mm x 7.6 m spiral, pivot bulb auger with drum | 1 | 1 | 48532582 | 045242480593 |
| 3) Ø 6 mm x 7.6 m spiral, bulb auger with drum | 1 | 1 | 48532583 | 045242480609 |
| ④ Ø 6 mm x 7.6 m spiral, pivot bulb auger with drum | 1 | 1 | 48532584 | 045242480616 |











M18™ FS drain cleaner accessories

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------------------|------------------|---------------------|----------------|---------------|
| ① Drain cleaner drum only | 1 | 1 | 4932464277 | 4058546222222 |
| ② 8 mm x 23 m spiral bulb auger | 1 | 1 | 48532772 | 045242513079 |
| ② 10 mm x 15 m spiral | 1 | 1 | 48532773 | 045242513086 |
| ② 13 mm x 15 m spiral | 1 | 1 | 48532774 | 045242513093 |
| ② 16 mm x 15 m spiral | 1 | 1 | 48532775 | 045242513109 |
| 3 Funnel retriever | 1 | 1 | 48532786 | 045242006106 |
| Drop head | 1 | 1 | 48532787 | 045242006113 |
| 36 mm spade bit | 1 | 1 | 48532788 | 045242006120 |
| 6 40 mm grease cutter | 1 | 1 | 48532789 | 045242006137 |
| 7 M18 Medium attachment set (5pc) | 5 | 1 | 48532790 | 045242006144 |

















M18[™] power speed drain cleaner accessories

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----------------------------------|------------------|---------------------|----------------|--------------|--|
| 1 6 mm x 10.5 m spiral bulb auger | 1 | 1 | 48532671 | 045242482740 | |
| 1 6 mm x 15 m spiral bulb auger | 1 | 1 | 48532672 | 045242482757 | |
| 1 8 mm x 10.5 m spiral bulb auger | 1 | 1 | 48532673 | 045242482764 | |
| 1 8 mm x 15 m spiral bulb auger | 1 | 1 | 48532674 | 045242482771 | |
| 10 mm x 10.5 m spiral | 1 | 1 | 48532675 | 045242482788 | |
| ② Retriever bulb | 1 | 1 | 48532681 | 045242503803 | |
| ③ Down retriever bulb | 1 | 1 | 48532682 | 045242503810 | |
| 4 25 mm spade bit | 1 | 1 | 48532683 | 045242503827 | |
| (5) 25 mm grease cutter | 1 | 1 | 48532684 | 045242503834 | |





6 M18 Small attachment set (5pc)







48532685



045242503841



M18™ sectional sewer accessories

NEW

| | | | | | | 1 | millium |
|-----|--|---------------|------------------------|----------------|---------------|-----|--|
| | Description | Pack quantity | Min. order quantity | Article Number | EAN Code | | |
| | Straight auger 22 mm | 1 | 1 | 48533830 | 4058546323462 | | |
| (1) | Straight auger 32 mm | 1 | 1 | 48534831 | 4058546323561 | | W |
| | Funnel retriver for sectional machine 22 mm cables | 1 | 1 | 48533831 | 4058546323479 | | |
| 2 | Funnel retriver for sectional machine 32 mm cables | 1 | 1 | 48534830 | 4058546323554 | 2 | |
| | 75 mm root cutter 22 mm | 1 | 1 | 48533832 | 4058546323486 | (2) | |
| | 75 mm root cutter 32 mm | 1 | 1 | 48534832 | 4058546323578 | | |
| | 100 mm root cutter 22 mm | 1 | 1 | 48533833 | 4058546323493 | | |
| | 100 mm root cutter 32 mm | 1 | 1 | 48534833 | 4058546323585 | | |
| | 150 mm root cutter 22 mm | 1 | 1 | 48533834 | 4058546323509 | | |
| | 150 mm root cutter 32 mm | 1 | 1 | 48534834 | 4058546323592 | | |
| | Small opening tool 22mm | 1 | 1 | 48533835 | 4058546323516 | | |
| | Medium opening tool 22mm | 1 | 1 | 48533836 | 4058546323523 | | |
| | 75 mm chain knocker for 22 mm | 1 | 1 | 48533837 | 4058546323530 | 3 | ······································ |
| | 100 mm chain knocker for 22 mm | 1 | 1 | 48533838 | 4058546323547 | | |
| 3 | Head attachment kit for drum machine 22 mm cables | 1 | 1 | 48533840 | 4058546296148 | | |
| | Head attachment kit for sectional machine 32 mm cables contains: straight auger, funnel retriver, 75, 100 and 150 mm root cutters, small and medium opening tools, 75 and 100 mm grease cutters | 1 | 1 | 48534839 | 4058546296155 | | |
| | Small opening tool 32 mm | 1 | 1 | 48534835 | 4058546323608 | | |
| | Medium opening tool 32 mm | 1 | 1 | 48534836 | 4058546323615 | 4 | |
| | 75 mm chain knocker 32 mm | 1 | 1 | 48534837 | 4058546323622 | 4) | |
| | 100 mm chain knocker 32 mm | 1 | 1 | 48534838 | 4058546323639 | | |
| | 32 mm x 4.5 m OW cable | 1 | 1 | 4932471710 | 4058546296094 | | |
| | 32 mm x 4.5 m OW cable | 1 | 1 | 4932471711 | 4058546296100 | | |
| | 22 mm x 4.5 m OW cable | 1 | 1 | 4932471712 | 4058546296117 | | |
| | 7 x 22mm x 4.5 m OW cable kit | 1 | 1 | 4932471713 | 4058546296124 | | |
| | Head attachment box | 1 | 1 | 4932471718 | 4058546296179 | | |
| | Sectional cable carrier | 1 | 1 | 4932471719 | 4058546296186 | | |
| | Pilot Tube for M18 FSSM | 1 | 1 | 4932471720 | 4058546296193 | | |
| | | • | | | | | |

Inspection cameras

All extension cables are water splash and dust proof.

Extensions are attached between the base camera unit and standard supplied camera cable.

| | | Description | Cable length (m) | Cable diameter (mm) | Fits inspection cameras | Pack quantity | Min. order quantity | Article Number | EAN Code | (1 |
|--|---|--|------------------------|---------------------------|-------------------------------|------------------|---------------------|-------------------|---------------|----|
| | | Cable extension: Up to a maximum of 3 extensions can be fixed together | 0.9 | 17 | C12 IC | 1 | 1 | 48530110 | 045242157747 | |
| | 1 | Cable extension: Up to a maximum of 5 extensions can be fixed together | 0.9 | 17 | C12 AVD, C12 AVA | 1 | 1 | 48530141 | 045242216529 | (2 |
| | | Replacement analog camera cable | 0.9 | 9.5 | C12 AVD, C12 AVA | 1 | 1 | 4931419517 | 4002395828234 | |
| | | 1m replacement cable camera for the M-spector camera | 1 | 12 | M12 IC AV3 | 1 | 1 | 48530150 | 045242344208 | |
| | | 3m replacement cable camera for the M-spector camera | 3 | 12 | M12 IC AV3 | 1 | 1 | 48530151 | 045242344222 | |
| | 2 | 1 m articulating cable | 1 | 12 | M12 IC AV3 | 1 | 1 | 48530155 | 045242344215 | |





Caulk guns - System attachments

| Description | Fits caulk guns | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|---|------------------|---------------------|----------------|---------------|
| 310 ml standard carriage. Accepts all standard 250 ml and 310 ml tubes/cartridges Includes plunger rod assembly (4932352937), piston for carriage assemblies and a feed screw (44700330) | C18 PCG | 1 | 1 | 48081076 | 045242263127 |
| 310 ml standard carriage. Accepts all standard 250 ml and 310 ml tubes/cartridges Includes plunger rod assembly (4932430099), piston for carriage assemblies and a feed screw (44700330) | C12 PCG | 1 | 1 | 48080900 | 045242286355 |
| 310 ml aluminium sausage tube barrel. Accepts standard 310 ml "sausage style" material packs and 380 ml cartridges. Requires plunger rod 49520660 | PCG 14 / 300, PCG 14 / 600 | 1 | 1 | 48081085 | 045242089246 |
| 400 ml aluminium sausage tube barrel. Accepts standard 400 ml "sausage style" material packs (includes 2 end cups). Requires plunger rod (48091090) and piston (44700375) | C18 PCG,C12 PCG | 1 | 1 | 4932352844 | 4002395375028 |
| 600 ml aluminium sausage tube barrel. Accepts standard 600 ml "sausage style" material packs (includes 2 end cups). Requires plunger rod (48091091) and piston (44700375) | C18 PCG,C12 PCG | 1 | 1 | 4932352845 | 4002395375035 |
| 400 ml transparent sausage tube barrel. Accepts standard 400 ml "sausage style" material packs (includes 2 end cups). Requires plunger rod (48091090) and piston (44700375) | C18 PCG,C12 PCG | 1 | 1 | 4932352842 | 4002395375004 |
| 600 ml transparent sausage tube barrel. Accepts standard 600 ml "sausage style" material packs (includes 2 end cups). Requires plunger rod (48091091) and piston (44700375) | C18 PCG,C12 PCG | 1 | 1 | 4932352843 | 4002395375011 |
| Plunger rod assembly for 310 ml cartridges. For use with: 48081076 310 ml standard carriage | C18 PCG | 1 | 1 | 4932352937 | 4002395375950 |
| Plunger rod assembly for 310 ml carriage. For use with: 48080900 310 ml standard carriage | C12 PCG | 1 | 1 | 4932430099 | 4002395377602 |
| Plunger rod assembly for 400 ml sausage tube barrel. For use with: 4932352844 400 ml aluminium sausage tube barrel. 4932352842 400 ml transparent sausage tube barrel | C18 PCG | 1 | 1 | 48091090 | 045242263158 |
| Plunger rod assembly for 400 ml sausage tube barrel. For use with: 4932352844 400 ml aluminium sausage tube barrel. 4932352842 400 ml transparent sausage tube barrel | C12 PCG | 1 | 1 | 4932430100 | 4002395377619 |
| Plunger rod assembly for 600 ml sausage tube barrel. For use with: 4932352845 600 ml aluminium sausage tube barrel. 4932352843 600 ml transparent sausage tube barrel | C18 PCG | 1 | 1 | 48091091 | 045242263165 |
| Plunger rod assembly for 600 ml sausage tube barrel. For use with: 4932352845 600 ml aluminium sausage tube barrel. 4932352843 600 ml transparent sausage tube barrel | C12 PCG | 1 | 1 | 4932430101 | 4002395377626 |
| Piston for carriage assemblies | C18 PCG,C12 PCG | 1 | 1 | 44700330 | 045242260928 |
| Piston for sausage tube barrels | C18 PCG,C12 PCG | 1 | 1 | 44700375 | 045242277438 |
| Replacement nozzle | PCG 14 / 300, PCG 14 / 600, C18 PCG,C12 PCG | 1 | 1 | 45760525 | 4002395775323 |

M18 FUEL™ fish tapes - System attachments

NEW

Steel fish drums

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------|------------------|---------------------|----------------|---------------|
| 36 m 1/8" steel fish drum | 1 | 1 | 48445176 | 4058546326432 |
| 73 m 1/8" steel fish drum | 1 | 1 | 48445178 | 4058546326449 |



Non-conductive drums

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------|------------------|---------------------|----------------|---------------|
| 30 m non-conductive drum | 1 | 1 | 48445195 | 4058546326463 |
| 60 m non-conductive drum | 1 | 1 | 48445197 | 4058546326470 |



Electrical Test & Measuring - System attachments

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|------------------|---------------------|----------------|--------------|-----|
| ① Electrical test probes (max. 1000 Volts/ 10 Amps) heads 125 mm long | 1 | 1 | 49771004 | 045242238965 | (1) |
| ② Electrical alligator clips (max. 1000 Volts/ 10 Amps) | 1 | 1 | 49771005 | 045242238972 | |



Heated jackets - System attachments

M18[™] USB Power Source - M18[™] USB PS HJ. Powers the jacket on M18[™] battery packs. USB charging port for MP3 player, mobile phone, digital camera, GPS.

12 V Car Plug - 12 V CP HJ. Powers the jacket on any 12 V cigarette style outlet.



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|---------------|
| ① M18 [™] 2.1A USB controller (M18 USB PS HJ2) | 1 | 1 | 4932471597 | 4058546294960 |
| ② M12 [™] car plug (12 V CP HJ) | 1 | 1 | 4932430085 | 4002395377466 |
| ③ M18 [™] 2.1A USB controller (M18 USB PS HJ2) | 1 | 1 | 4932471597 | 4058546294960 |





Dust absorption solutions - System attachments

Vacuum cleaners

| | Description | Fits Milwaukee dust absorption systems | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------|--|---|------------------|---------------------|----------------|---------------|
| | Extraction hose, anti static. 4 m long 36 mm diameter with tool adaptor $$ | AS 300 ELCP,AS 500 ELCP, AS 300 EMAC | 1 | 1 | 4932352311 | 4002395369706 |
| | Extraction hose. 3.5 m long 32 mm diameter with tool adaptor | AS 250 ECP | 1 | 1 | 4932352312 | 4002395369713 |
| System | Adaptor for direct connection of suction hose 330552 | AS 1,AS 2 C | 1 | 1 | 4932430833 | 4002395384952 |
| Ø 35 mm | Universal adaptor Ø 35 / 33 / 27 mm | WDC 1400 A,AS 1,AS 2 C, AS 3 W,ASE 1400,ASM 1400 | 1 | 1 | 4932369282 | 4002395338412 |
| | Ø 35 mm suction tube 50 cm plastic | ASE 1400,AS 1,AS 2 C,ASM 1400 | 1 | 1 | 4932346620 | 4002395319503 |
| | Extraction hose Ø 35 mm / 5 m | ASE 1400,ASM 1400 | 1 | 1 | 4932373626 | 4002395351534 |
| System Ø 50 | Ø 50 mm wide gap nozzle. | ASE 1400,AS 1,AS 2 C,ASM 1400 | 1 | 1 | 4932316070 | 4002395310449 |
| mm | \emptyset 50 mm to \emptyset 35 mm reduction sleeve | ASE 1400,AS 1,AS 2 C,ASM 1400 | 1 | 1 | 4932316074 | 4002395310456 |
| | 5 x 25 l fleece filter bags | AS 250 ECP | 5 | 1 | 4932352306 | 4002395369652 |
| | 5 x 30 l fleece filter bags | AS 300 ELCP,AS 300 EMAC, AS 300 ELAC | 5 | 1 | 4932352307 | 4002395369669 |
| | 5 x 50 I fleece filter bags | AS 500 ELCP | 5 | 1 | 4932352308 | 4002395369676 |
| | Filter bags: 5 x plastic bags, 30 l | AS 250 ECP,AS 300 ELCP, AS 300 EMAC | 5 | 1 | 4932352309 | 4002395369683 |
| Filter | Filter bags: 5 x plastic bags, 50 l | AS 500 ELCP | 5 | 1 | 4932352310 | 4002395369690 |
| bags | Filter bags. Heavy duty 3 x 18 l paper bags | NT 1500 A | 1 | 1 | 4932373669* | 4002395351824 |
| | Filter bags. Heavy duty 5 x 25 l paper bags | RSE 1400 | 5 | 1 | 4932373852 | 4002395352821 |
| | Filter bags. Heavy duty 5 x 50 l paper bags | ASE 1400,ASM 1400 | 5 | 1 | 4932373621 | 4002395351503 |
| | Fleece filter bags for AS 30/42 | AS 30 LAC,AS 30 MAC, AS 42 MAC | 5 | 1 | 4932459689 | 4058546028619 |
| | Disposable bags 30 l | AS 42 MAC,AS 30 MAC, AS 30 LAC | 5 | 1 | 4932459690 | 4058546028626 |
| | Filter cartridge | AS 250 ECP,AP 250 ECP | 1 | 1 | 4932352303 | 4002395369621 |
| | Filter cartridge | AS 300 ELCP,AS 500 ELCP, AS 2-250 ELCP | 1 | 1 | 4932352304 | 4002395369638 |
| | Filter cartridge | AS 300 EMAC,AS 300 ELAC | 2 | 1 | 4932352305 | 4002395369645 |
| Filters | Filter cartridge, 7000 cm ² , BIA usage Cat. C | AS 3 W | 1 | 1 | 4932346588* | 4002395319473 |
| THEIS | Flat folded polyester filter cartridge, 2 pcs | ASE 1400,ASM 1400 | 1 | 1 | 4932373623 | 4002395351510 |
| | PTFE flat filter | AS 30 LAC,AS 42 MAC, AS 30 MAC | 1 | 1 | 4932459687 | 4058546028596 |
| | Motor cooling filter | AS 42 MAC,AS 30 MAC, AS 30 LAC | 1 | 1 | 4932459688 | 4058546028602 |
| | Metal push handle | AS 42 MAC,AS 30 MAC, AS 30 LAC | 1 | 1 | 4932459691 | 4058546028633 |

M12™ / M18™ dust absorption system

| Description | Fits Milwaukee dust absorption systems | Pack quantity | Min. order quantity | Article Number | EAN Code | 1 | |
|--|--|------------------|---------------------|----------------|---------------|-----|------|
| ① Drilling nozzle | M18 CDEX / M18/28 CPDEX, M12 DE | 2 | 1 | 49902301 | 045242337279 | 2 | |
| ② Filter | M18 CDEX / M18/28 CPDEX, M12 DE | 3 | 1 | 49902306 | 045242299454 | | |
| ③ Crevice nozzle | M12 DE | 1 | 1 | 49902325* | 045242297603 | 3 | |
| Filter set (3pc) Filter box, filter, box lid | M12 DE | 3 | 1 | 49902340 | 045242299461 | 4 | |
| (5) M18 & M28 Dustbox with filter box, filter | M18 CDEX / M18/28 CPDEX | 4 | 1 | 49902342 | 045242341948 | (5) | AT . |
| Dust thru-box to allow or M12 DE to an independe vacuum cleaner. Outlet r Ø 32 mm inside | | 1 | 1 | 4932430479 | 4002395381401 | 6 | |
| Drilling shroud - PHDE15 coring from Ø 25 - 152 r improve suction and extr | nm. Brush insert to | 1 | 1 | 4932471990 | 4058546298890 | 0 | |

Chargers


| Description | System | Charging range | Charging time (min) | For battery type Li-lon | Article Number | EAN Code |
|-------------|-----------------|----------------|---------------------|-------------------------|----------------|---------------|
| ① M4 C | M4 | 4 V | 30 | Yes | 4932352958 | 4002395376162 |
| ② L4 C | REDLITHIUM™ USB | 4 V | 120 | Yes | 4932459446 | 4058546011079 |
| ③ C12 C | M12 | 12 V | 40/70/80/130 | Yes | 4932352000 | 4002395366606 |
| ④ M12 TC | M12 | 12 V | 40/70/80/130 | Yes | 4932459450 | 4058546011116 |
| ⑤ M12 C4 | M12 | 12 V | 40/80/130 | Yes | 4932430554 | 4002395382156 |
| ⑥ M12-18 C | M12,M14,M18 | 12 - 18 V | 40/80/100/124/180 | Yes | 4932352959 | 4002395376179 |
| ⑦ M12-18 AC | M12,M14,M18 | 12 - 18 V | 40/80/100/124/180 | Yes | 4932459205 | 4002395287208 |
| ® M12-18 FC | M12,M14,M18 | 12 - 18 V | 26/47/59/68/95 | Yes | 4932451079 | 4002395810581 |
| 9 M1418 C6 | M14,M18 | 14.4 V - 18 V | 40/80/100/124/180 | Yes | 4932430086 | 4002395377473 |
| ① M28 C | M28 | 28 V | 60/90 | Yes | 4932352524 | 4002395371822 |



Batteries

| Description | System | Battery type | Voltage (V) | Battery pack capacity (Ah) | Article Number | EAN Code | 1 | 11) | 50.00 |
|------------------|--------------------|--------------|-------------|-------------------------------|----------------|---------------|--|---------|------------|
| ① M4 B2 | M4 | Li-ion | 4 | 2.0 | 4932430098 | 4002395377596 | | | |
| ② L4 B2 | REDLITHIUM™ USB | Li-ion | 4 | 2.5 | 4932459445 | 4058546011062 | 2 | (2) | 60 |
| ③ M12 B2 | M12 | Li-ion | 12 | 2.0 | 4932430064 | 4002395377251 | N | | |
| ④ M12 B3 | M12 | Li-ion | 12 | 3.0 | 4932451388 | 4002395157969 | 3 | (3) | |
| ⑤ M12 B4 | M12 | Li-ion | 12 | 4.0 | 4932430065 | 4002395377268 | MC Irrent of 2 and | | 9. |
| ⑥ M12 B6 | M12 | Li-ion | 12 | 6.0 | 4932451395 | 4002395158638 | 4 | (4) | |
| ⑦ M14 B | M14 | Li-ion | 14.4 | 1.5 | 4932352665 | 4002395373239 | MICE STREET | | |
| ® M14 B4 | M14 | Li-ion | 14.4 | 4.0 | 4932430323 | 4002395379842 | (5) [| Œ | |
| 9 M18 B2 | M18 | Li-ion | 18 | 2.0 | 4932430062 | 4002395377237 | | (5) | 50. |
| ① M18 B4 | M18 | Li-ion | 18 | 4.0 | 4932430063 | 4002395377244 | 4.0 | | |
| ① M18 B5 | M18 | Li-ion | 18 | 5.0 | 4932430483 | 4002395381449 | 6 | 16 | |
| ② M18 B6 | M18 | Li-ion | 18 | 6.0 | 4932451244 | 4002395167661 | 6.0 | | |
| ③ M18 B9 | M18 | Li-ion | 18 | 9.0 | 4932451245 | 4002395167678 | 7 | 7 | 5.5 |
| (4) M28 BX | M28 | Li-ion | 28 | 3.0 | 4932352732 | 4002395373901 | 7 | SE F | |
| (5) M28 B5 | M28 | Li-ion | 28 | 5.0 | 4932430484 | 4002395381456 | 8 | 18 | - |
| ⑥ М18 НВ3 | M18 | Li-ion | 18 | 3.0 | 4932471069 | 4058546286972 | | | 8.0 |
| ⑦ M18 HB5.5 | M18 | Li-ion | 18 | 5.5 | 4932464712 | 4058546226572 | 9 | 19 | The second |
| ® M18 HB8 | M18 | Li-ion | 18 | 8.0 | 4932471070 | 4058546286989 | 10 | | 120= |
| 19 M18 HB12 | M18 | Li-ion | 18 | 12.0 | 4932464260 | 4058546222055 | 4 | 0. 6123 | |

milwaukeetool.eu

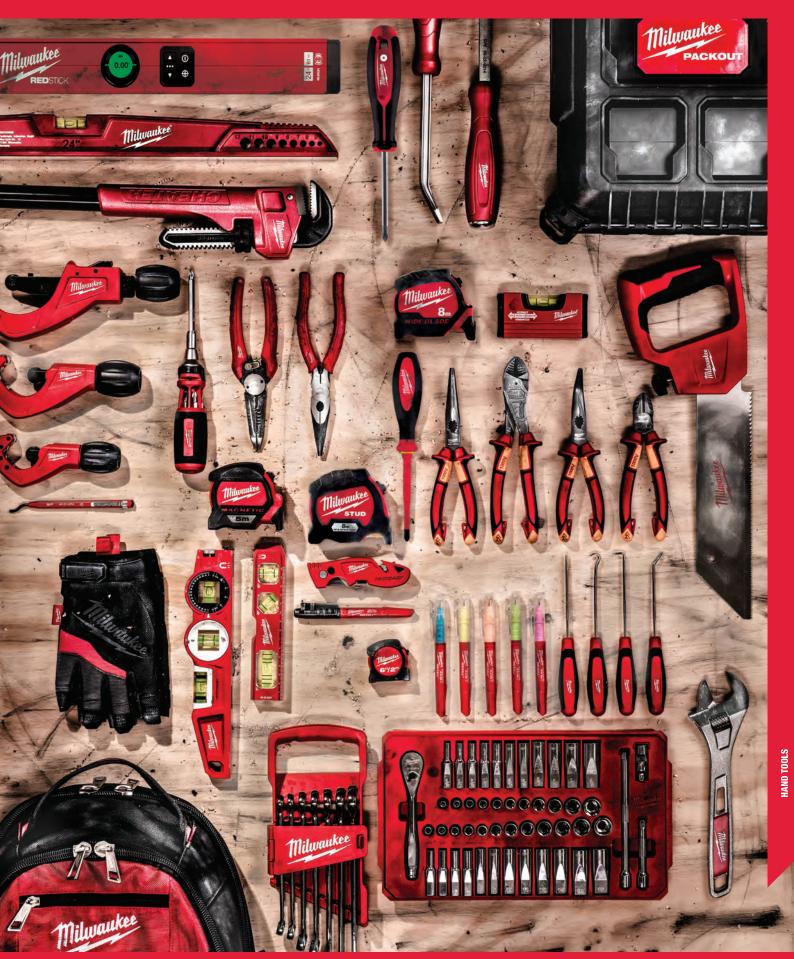

Hand Tools

Tape measures STUD™ II

NEW










- EXO 360[™] blade technology delivers long lasting, rip and wear resistance.
- Strong magnet at start of the tape allows easy hooking onto flat surfaces and round pipe.
- Up to 4 m standout higher standout for higher efficiency and higher reach.
- Anti-tear coating reinforces the first 15 cm of the blade.
- 2 sided blade printing increases the readability.
- Patented finger stop protects fingers from blade retraction.
- ABS housing with impact resistant overmold for more comfort and jobsite durability.
- Wire form belt clip reduces pocket tearing.
- Tool lanyard hole Ready for quick and easy tethering.
- Class II accuracy.

| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------|------------|---------------------|------------------|---------------------|----------------|---------------|
| STUD Gen2 5 m | 5 | 33 | 1 | 6 | 4932471626 | 4058546295257 |
| STUD Gen2 8 m | 8 | 33 | 1 | 6 | 4932471627 | 4058546295264 |
| STUD Gen2 5 m 16 ft | 5 / 16' | 33 | 1 | 6 | 4932471628 | 4058546295271 |
| STUD Gen2 8 m 26 ft | 8 / 26' | 33 | 1 | 6 | 4932471629 | 4058546295288 |





Strong magnet



4M STANDOUT



Premium wide blade tape measures

NEW

- Up to 4 m standout higher standout for higher efficiency and higher reach.
- Anti-tear coating reinforces the first 15 cm of the blade.
- 2 sided blade printing increases the readability.
- Impact resistant 5 points reinforces the frame and makes it more durable.
- Patented finger stop protects fingers from blade retraction.
- Wire form belt clip reduces pocket tearing.
- Nylon bond blade protection reduces tape tear.
- Tool lanyard hole Ready for quick and easy tethering.





| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------------|------------|---------------------|------------------|---------------------|----------------|---------------|
| Premium Wide Blade 5 m | 5 | 33 | 1 | 6 | 4932471815 | 4058546297145 |
| Premium Wide Blade 8 m | 8 | 33 | 1 | 6 | 4932471816 | 4058546297152 |
| Premium Wide Blade 5 m 16 ft | 5 / 16' | 33 | 1 | 6 | 4932471817 | 4058546297169 |
| Premium Wide Blade 8 m 26 ft | 8 / 26' | 33 | 1 | 6 | 4932471818 | 4058546297176 |



4M STANDOUT

Magnetic tape measures GEN III

NEW











- Strong magnet at start of the tape allows easy hooking onto flat surfaces and round pipe.
- Compact and ergonomic design.
- Improved standout up to 3.4 m.
- Nylon non-reflective bond blade protection, up to 10x more resistant to jobsite damage.
- 27 mm blade with double sided printing on tape for easier readability.
- Patented finger stop: stable when stands alone.
- \blacksquare 5-point reinforced frame for jobsite durability.
- Class II accuracy.
- Architect scale provides easy calculating of scaled drawings.

| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------------------|------------|------------------|------------------|---------------------|----------------|---------------|
| Magnetic Tape Measure 5 m | 5 | 27 | 1 | 6 | 4932464599 | 4058546225445 |
| Magnetic Tape Measure 8 m | 8 | 27 | 1 | 6 | 4932464600 | 4058546225452 |
| Magnetic Tape Measure 10 m | 10 | 27 | 1 | 6 | 4932464601 | 4058546225469 |
| Magnetic Tape Measure 5 m - 16 ft | 5 / 16' | 27 | 1 | 6 | 4932464602 | 4058546225476 |
| Magnetic Tape Measure 8 m - 26 ft | 8 / 26' | 27 | 1 | 6 | 4932464603 | 4058546225483 |



Tape measure Autolock

- Autolock break: tape automatically locks in place as blade is pulled out.
- Nylon coated blade protection against debris, dirt and water.
- 5 Point reinforced housing for outstanding tape lifetime.
- ABS housing with impact resistant overmold for more comfort and jobsite durability.
- Compact design and comfortable size.
- Heavy Duty belt clip.
- Class II accuracy.
- Bulk packed, order in multiples of 6pcs.



| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------------------|---------------|---------------------|------------------|---------------------|----------------|---------------|
| Tape measure Autolock 5 m | 5 | 25 | 1 | 6 | 4932464663 | 4058546226084 |
| Tape measure Autolock 8 m | 8 | 25 | 1 | 6 | 4932464664 | 4058546226091 |
| Tape measure Autolock 5 m - 16 ft | 5 | 25 | 1 | 6 | 4932464665 | 4058546226107 |
| Tape measure Autolock 8 m - 26 ft | 8 | 25 | 1 | 6 | 4932464666 | 4058546226114 |

Tape measures pro compact

- Improved ergonomics and comfortable size.
- Jobsite durability.
- 5 Point reinforced housing.
- 2G nylon coated blade protection.
- Improved tape tear and flexibility.
- Withstands 3 m drop test.
- Non magnetic.
- Heavier font on measurements for better readability.
- Smaller compact hook design.
- Back rest for easy vertical measuring.
- Improved belt clip: more pocket friendly.



| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------------|------------|------------------------|------------------|---------------------|----------------|---------------|
| Tape measure pro compac C3/16 | t 3 | 16 | 1 | 12 | 4932459591 | 4058546027636 |
| Tape measure pro compac C5/19 | t 5 | 19 | 1 | 12 | 4932459592 | 4058546027643 |
| Tape measure pro compac C5/25 | t 5 | 25 | 1 | 6 | 4932459593 | 4058546027650 |
| Tape measure pro compac C8/25 | t 8 | 25 | 1 | 6 | 4932459594 | 4058546027667 |
| Tape measure pro compac C5-16/25 | t 5/16' | 25 | 1 | 24 | 4932459595 | 4058546027674 |
| Tape measure pro compac C8-26/25 | t 8 / 26' | 25 | 1 | 12 | 4932459596 | 4058546027681 |

Tape measure with LED Light

- 19 LUX LED Light: helps finding measured spot.
- Nylon lacquer blade protection against debris, dirt and water.
- 4 Point reinforced housing for outstanding tape lifetime.
- ABS housing with impact resistant overmold for more comfort and jobsite durability.
- Compact design and comfortable size.
- Magnet on the rear side of the tape for attaching to metal tool boxes and other metal surfaces.
- 2x CR2016 batteries are included in the delivery scope.
- Class II accuracy.
- Bulk packed, order in multiples of 12 pcs.



| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------|------------|------------------|------------------|---------------------|----------------|--------------|
| 3m/10ft tape measure with LED | 3 | 12 | 1 | 12 | 48226602 | 045242529285 |

Tape measures slimline

- Very compact and improved ergonomic design.
- Nylon coated blade protection against debris, dirt and water.
- ABS housing with softgrip rubber gripping area for extra comfort and jobsite durability.
- 4 point reinforced frame.
- Flat base for horizontal stability and back rest for easy vertical measuring.
- Belt clip.
- Class II accuracy.
- Orders are only possible in master cartons with 24,12 or 6 tapes depending on sku.



| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------|------------|------------------|------------------|---------------------|----------------|--------------|
| S3 / 16 | 3 | 16 | 1 | 12 | 48227703 | 045242512898 |
| S5 / 19 | 5 | 19 | 1 | 12 | 48227705 | 045242512904 |
| S5 / 25 | 5 | 25 | 1 | 6 | 48227706 | 045242512911 |
| S8 / 25 | 8 | 25 | 1 | 6 | 48227708 | 045242512928 |
| S5-16 / 25 | 5/16' | 25 | 1 | 24 | 48227717 | 045242512935 |
| S8-26 / 25 | 8/26' | 25 | 1 | 24 | 48227726 | 045242512942 |

Tape measure - 2 m / 6 ft



- 5-point reinforced frame for job site durability.
- Heavy duty blade with 13 mm blade width.
- Double sided nylon bond blade protection for extreme tape durability against dust, dirt, debris and water.
- Compact design and overmould gripping area for extra comfort and durability.
- Bulk packed, order in multiples of 12 pcs.

| Description | Length (m) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------|------------------|---------------------|----------------|--------------|
| 2 m/6 ft metric & imperial tape measure | 2 | 1 | 12 | 48225502 | 045242468034 |

Composite folding rule

- Locks at 90°/180°.
- Angle reference, rust free.
- Water resistant.
- Wear resistant markings.



| Description | Length (m) | Blade width (mm) | Accuracy | Links | Hinge | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|------------------------|------------|------------------|----------|-------|-----------------------------|---------------|---------------------|----------------|---------------|--|
| Composite folding rule | 2 | 15 x 3.20 | Class 2 | 10 | Plastic and stainless steel | 1 | 10 | 4932459301 | 4058546002671 | |

Wood folding rule

- Locks at 90°/180°.
- Angle reference.



| Description | Length (m) | Blade width (mm) | Accuracy | Links | Hinge | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------|------------|---------------------|----------|-------|-------|------------------|---------------------|----------------|---------------|
| Wood folding rule | 2 | 16 x 3.20 | Class 3 | 10 | Brass | 1 | 12 | 4932459302 | 4058546002688 |

Slim wood folding rule

- Locks at 180°.
- Flexible slim design.



| Description | Length (m) | Blade width (mm) | Accuracy | Links | Hinge | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------|------------|---------------------|----------|-------|-------|------------------|---------------------|----------------|---------------|
| Slim wood folding rule | 2 | 16 x 2.70 | Class 3 | 10 | Brass | 1 | 10 | 4932459303 | 4058546002695 |

Long open tapes

- Steel blade design with nylon clad (extra thick nylon coating) for increased durability.
- Best in class stretch performance: up to 50% less stretch vs. fibreglass tapes.
- Ultra durable design: reinforced metal handle and drop durability.
- 3:1 clutched planetary gearing for 10x longer gear durability and smooth rewind.
- GRIME GUARD: debris wiper keeps blade clean and clear of abrasive material.
- Class II accuracy.
- 2 sided scale printing. Metric measurements shown on the top side and imperial (inches and feet) on the underside of the blade.

| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------------------|------------|---------------------|------------------|---------------------|----------------|--------------|
| O Long open tape combi 30m/100ft | 30 | 13 | 1 | 1 | 48225203 | 045242486069 |
| 2 Long open tape combi 100m/330ft | 100 | 9.5 | 1 | 1 | 48225211 | 045242486076 |





Fibreglass long tapes

- Fibreglass blade ensures a low tape weight.
- 3:1 clutched planetary gearing for 10x longer gear durability and smooth rewind.
- GRIME GUARD: debris wiper keeps blade clean and clear of abrasive material.
- 2 sided scale printing. Metric measurements shown on the top side and imperial (inches and feet) on the underside of the blade.

| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------|------------------|------------------|---------------------|----------------|--------------|
| ① Fibreglass long tape combi 30m/100ft | 30 | 13 | 1 | 1 | 48225330 | 045242527731 |
| ② Fibreglass long tape combi 60m/200ft | 60 | 13 | 1 | 1 | 48225360 | 045242527748 |





Long closed tapes

- Single sided 30 m metric tape with 9.5 mm blade width.
- GRIME GUARD: debris wiper keeps blade clean and clear of abrasive material.
- Ultra durable design: reinforced metal frame housing, reinforced handle and steel blade with nylon coating.
- 3:1 clutched planetary gearing for 10x longer gear durability and smooth rewind.
- Class II accuracy



| Description | Length (m) | Blade width (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|------------|------------------|------------------|------------------------|----------------|--------------|
| Long closed tape 30m | 30 | 9.5 | 1 | 1 | 48225103 | 045242486106 |



REDSTICK[™] DIGITAL LEVELS



HEAVY DUTY DESIGN

- · Increased frame and strength
- 2x stronger display
- IP65 rating

BEST USER EXPERIENCE

- · Enhanced visual and audio signals
- AUTO MODE Screen automatically adjusts to the environment based on the amount of light

PRECISION ACCURACY

- PIN MODE Quickly set and save any measurement with 360°
- DYNAMIC READOUT Delivers enhanced graphics when approaching the target
- Accurate to: 0°, 90°/.03° and 1°-89°/.10



Digital levels

NEW





| Description | Length (cm) | Handles | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|-------------|---------|------------------|---------------------|----------------|---------------|
| Digital level 60 cm | 60 | 0 | 1 | 1 | 4933471978 | 4058546298777 |
| Digital level 120 cm | 120 | 2 | 1 | 1 | 4933471979 | 4058546298784 |



Expandable level





- Cover any length from 200 cm 366 cm with laser etched measurements.
- SHARPSITE™ vial technology improves the readability of the vial.
- Reinforced internal components protect the level from damage or wear.
- Precision milled measuring surface provides accuracy in all working positions.
- Accurate to 0.029° (0.0005 "/in, 0.5 mm/m) In normal and reverse position.
- High contrast vial system is easy to clean and optimises visibility.
- Full grip frame for improved ergonomics in transport & application.
- Secure tool-removable stand offs.



| Description | Length (cm) | Handles | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------|-------------|---------|------------------|---------------------|----------------|---------------|
| Expandable 200cm - 366cm | 200 - 366 | 2 | 1 | 1 | 4932471355 | 4058546289836 |







REDSTICK

DURABLE. GUARANTEED ACCURACY. ACCURACY. ACCURACY. ACCURACY.





Shock absorbing end caps protect the frame.



Durable, All-Metal Hang Hole for storage



Wide, durable handles for comfort and portability



High Contrast Vial System is easy to clean and optimizes visibility



Over-moulded, non-slip grips stick to the wall and prevent sliding



Precision milled measuring surface guarantees accuracy in all working positions







AMPLIFIED RARE-EARTH MAGNETS

REDSTICK™ BACKBONE™ box levels



- All-metal BACKBONE™. Strong and durable frame. Reinforced vial retention.
- SHARPSITE™ vial technology improves the readability of the vial.
- Wide, durable handles for comfort and portability.
- Precision milled measuring surface provides accuracy in all working positions.
- High contrast vial system is easy to clean and optimises visibility.
- Shock absorbing end caps protect the frame.
- Overmolded, non-slip grips stick to the wall and prevent sliding.
- Durable, all-metal hang hole for storage.
- Accurate to 0.029° (0.0005 "/in, 0.5 mm/m) In normal and reverse position.
- Amplified rare earth magnets for maximum holding power (only magnetic levels).





Strong and durable frame, all metal reinforced BACKBONE™



SHARPSITE™ vial technology improves the readability of the vial



Amplified rare earth magnets for maximum holding power (only magnetic levels)



| Description | Length (cm) | Handles | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------|---------|------------------|---------------------|----------------|---------------|
| 40 cm magnetic | 40 | 0 | 1 | 1 | 4932459061 | 4002395280322 |
| 60 cm magnetic | 60 | 0 | 1 | 1 | 4932459063 | 4002395280346 |
| 80 cm magnetic | 80 | 1 | 1 | 1 | 4932459065 | 4002395280360 |
| 100 cm magnetic | 100 | 0 | 1 | 1 | 4932459067 | 4002395280384 |
| 120 cm magnetic | 120 | 2 | 1 | 1 | 4932459069 | 4002395281008 |
| 180 cm magnetic | 180 | 2 | 1 | 1 | 4932459071 | 4002395281046 |
| 200 cm magnetic | 200 | 2 | 1 | 1 | 4932459073 | 4002395281060 |
| 240 cm magnetic | 240 | 2 | 1 | 1 | 4932459075 | 4002395281084 |
| 40 cm non-magnetic | 40 | 0 | 1 | 1 | 4932459060 | 4002395280315 |
| 60 cm non-magnetic | 60 | 0 | 1 | 1 | 4932459062 | 4002395280339 |
| 80 cm non-magnetic | 80 | 1 | 1 | 1 | 4932459064 | 4002395280353 |
| 100 cm non-magnetic | 100 | 0 | 1 | 1 | 4932459066 | 4002395280377 |
| 120 cm non-magnetic | 120 | 2 | 1 | 1 | 4932459068 | 4002395280391 |
| 180 cm non-magnetic | 180 | 2 | 1 | 1 | 4932459070 | 4002395281015 |
| 200 cm non-magnetic | 200 | 2 | 1 | 1 | 4932459072 | 4002395281053 |
| 240 cm non-magnetic | 240 | 2 | 1 | 1 | 4932459074 | 4002395281077 |
| End-caps for REDSTICK™ BACKBONE™ level: | S | | 2 | 1 | 4932459680 | 4058546028527 |

REDSTICK™ compact box levels



- SHARPSITE™ vial technology improves the readability of the vial.
- Compact and durable frame.
- Bottom milled measuring surface provides maximum accuracy.
- High contrast vial system is easy to clean and optimises visibility.
- Amplified rare earth magnets for maximum holding power (only magnetic levels).
- Accurate to 0.029° (0.0005 "/in, 0.5 mm/m) in standard position.
- Shock absorbing rubber end caps.

| Description | Length (cm) | Handles | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------------------|-------------|---------|------------------|---------------------|----------------|---------------|
| 40 cm magnetic | 40 | 0 | 1 | 1 | 4932459079 | 4002395281725 |
| 0 cm magnetic | 60 | 0 | 1 | 1 | 4932459081 | 4002395281749 |
| 0 cm magnetic | 80 | 0 | 1 | 1 | 4932459083 | 4002395281763 |
| 00 cm magnetic | 100 | 0 | 1 | 1 | 4932459085 | 4002395281787 |
| 120 cm magnetic | 120 | 0 | 1 | 1 | 4932459087 | 4002395282401 |
| 180 cm magnetic | 180 | 0 | 1 | 1 | 4932459089 | 4002395282425 |
| cm non-magnetic | 40 | 0 | 1 | 1 | 4932459078 | 4002395281718 |
| 0 cm non-magnetic | 60 | 0 | 1 | 1 | 4932459080 | 4002395281732 |
| 0 cm non-magnetic | 80 | 0 | 1 | 1 | 4932459082 | 4002395281756 |
| 00 cm non-magnetic | 100 | 0 | 1 | 1 | 4932459084 | 4002395281770 |
| 120 cm non-magnetic | 120 | 0 | 1 | 1 | 4932459086 | 4002395281794 |
| 80 cm non-magnetic | 180 | 0 | 1 | 1 | 4932459088 | 4002395282418 |
| nd-caps for REDSTICK™ compact levels | | | 2 | 1 | 4932459681 | 4058546028534 |

REDSTICK™ concrete levels



- SHARPSITE™ vial technology improves the readability of the vial.
- Ergonomic keyhole profile delivers maximum durability and continuous grip across entire level.
- Wide magnesium base for enhanced screeding functionality and cleanability.
- Dedicated working edges include a rounded and a squared bottom edge for cutting and finishing concrete.
- High contrast vial system is easy to clean and optimises visibility.
- Vial surrounds are optimised for screeding applications and cleanability.
- Slope vials rated for 1/8" & 1/4" (1% & 2%).











Slim box levels



- 2 solid acrylic vials. Shockproof and UV resistant.
- Precision milled measuring surface up to 120 cm provides maximum accuracy.
- Shock absorbing end caps.
- Durable hang hole for storage.
- VPA third party certificate on accuracy.
- Accurate to 0.029° (0.0005 ″/in, 0.5 mm/m) in standard position.





| Description | Length (cm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------|-------------|------------------|---------------------|----------------|---------------|
| 40 cm magnetic | 40 | 1 | 1 | 4932464854 | 4058546227999 |
| 60 cm magnetic | 60 | 1 | 1 | 4932464855 | 4058546228002 |
| 100 cm magnetic | 100 | 1 | 1 | 4932464856 | 4058546228019 |
| 180 cm magnetic | 180 | 1 | 1 | 4932464857 | 4058546228026 |
| 20 cm non-magnetic | 20 | 10 | 1 | 4932472091 | 4058546324872 |
| 40 cm non-magnetic | 40 | 1 | 1 | 4932459090 | 4002395282432 |
| 60 cm non-magnetic | 60 | 1 | 1 | 4932459091 | 4002395282449 |
| 80 cm non-magnetic | 80 | 1 | 1 | 4932459092 | 4002395282456 |
| 100 cm non-magnetic | 100 | 1 | 1 | 4932459093 | 4002395282463 |
| 120 cm non-magnetic | 120 | 1 | 1 | 4932459094 | 4002395282470 |
| 180 cm non-magnetic | 180 | 1 | 1 | 4932459095 | 4002395282487 |
| 200 cm non-magnetic | 200 | 1 | 1 | 4932459590 | 4058546027629 |

REDCAST die-cast levels



- 2 solid acrylic vials. Shockproof and UV resistant.
- 2 Heavy Duty cast aluminium "anvil" strike pads for trowel blows during tile work.
- Drill bit diameter gauge in the level's profile from 5 to 12 mm.
- Precision milled measuring surface provides maximum accuracy.
- Durable hang hole for storage.
- VPA third party certificate on accuracy.
- Accurate to 0.029° (0.0005 "/in, 0.5 mm/m).

| Description | Length (cm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------|-------------|------------------|---------------------|----------------|---------------|
| REDCAST die-cast level 60 cm | 60 | 1 | 1 | 4932459098 | 4002395283118 |
| REDCAST die-cast level 80 cm | 80 | 1 | 1 | 4932459099 | 4002395283125 |





Block torpedo level



- SHARPSITE™ vial technology improves the readability of the vial.
- Locking 360° adjustable vial. Identify and repeat any angle needed on the jobsite. Lock vial in place to keep accuracy in and out of pocket/pouch.
- Amplified rare earth magnets for maximum holding power.
- Reinforced plumb vials. Solid, acrylic block vials offer maximum durability.
- Die cast aluminium body withstands the conditions of the jobsite.
- Precision milled measuring surface provides maximum accuracy.
- Lanyard hole for use with all most prevention programs.
- Accurate to 0.029° (0.0005 "/in, 0.5 mm/m).





| Description | Length (cm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------|-------------|------------------|---------------------|----------------|---------------|
| Block torpedo level | 25 | 1 | 1 | 4932459096 | 4002395282494 |

Billet torpedo level



- Amplified rare earth magnets for maximum holding power.
- Maximised viewing area. Easily read slope in 1/8" or 1/4" per foot in either direction.
- Reinforced acrylic vials offer maximum durability.
- Weld clearance. Easily level over weld joints in pipes and other materials.
- Optimised V-groove design for stability on non-ferrous pipes.
- Laser etched ruled edge for quick measurements on material.
- Slim, tapered design for easy sliding in and out of pockets and pouches.





| Description | Length (cm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|-------------|------------------|---------------------|----------------|---------------|
| Billet torpedo level | 17 | 1 | 1 | 4932459097 | 4002395283101 |

Pocket level

- 360° adjustable vial for reading angles.
- Locking mechanism for repetitive use in and out of pocket/pouch.
- Amplified Rare-Earth magnets for maximum holding power.
- V-groove for leveling on pipes.
- Milled edge to ensure accuracy.
- Compact size for jobsite functionality.









| Description | Length (cm) | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|--------------|-------------|------------------|---------------------|----------------|---------------|--|
| Pocket level | 7.8 | 1 | 6 | 4932459597 | 4058546027698 | |

Compact torpedo

NEW

- SHARPSITE™ Pitch Vial for easy reading of 1 and 2 degree pitch.
- Sub compact design for working in tight spaces.
- Optimized V-grove design for stability of rounded surfaces.
- Weld clearance to level over weld lines in pipe and other material.
- Amplified rare earth magnets for maximum holding power.
- Accurate to 0.029° (0.0005 ″/in, 0.5 mm/m).

| Description | Length (cm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------|-------------|------------------|---------------------|----------------|---------------|
| Compact torpedo | 7.6 | 1 | 1 | 4932472122 | 4058546325183 |





Minibox level



- Lightweight aluminium box profile fits easily into your tool belt or pocket.
- Solid acrylic vial. Shockproof and UV resistant vials.
- Shockproof end caps.
- Accurate to 0.029° (0.0005 ″/in, 0.5 mm/m) in standard position.
- VPA third party certificate on accuracy.







| Description | Length (cm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|-------------|------------------|---------------------|----------------|---------------|
| Minibox level | 10 | 1 | 10 | 4932459100 | 4002395283446 |

Chalk Reel NEW

- Extra bold lines 2mm thick line for maximum visibility
- Planetray Gear System for increased durability
- 4/1 Gear Ratio for fast line retraction
- Large Chalk Capacity
- Easy refills due to the extra large quick turn opening
- Easy line securing due to the line lock





| | 2 |
|--|---|
| | |



3

1

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------------------|------------------|------------------------|----------------|---------------|
| 30 m large capacity chalk reel | 1 | 1 | 4932471634 | 4058546295332 |
| 2 45 m large capacity chalk reel | 1 | 1 | 4932471635 | 4058546295349 |
| 30 m replacement line chalk reel | 1 | 1 | 4932471636 | 4058546295356 |
| 45 m replacement line chalk reel | 1 | 1 | 4932471637 | 4058546295363 |

INKZALL™ markers

- Stays sharp, doesn't mushroom or push back under pressure.
- Acrylic nib ideal for rough surfaces such as OSB and concrete.
- Marker continues to write after 72+ hours of cap off time.
- For use on concrete, wood, metal, plywood, OSB, plastic.
- Can be used on wet, oily, dusty, rusty, with debris surfaces.
- Quick dry time reduced smearing markings on PVC, metal surfaces.
- Thin body for use in restricted areas.
- Helmet clip can be clipped to the construction site cap, trousers, overalls.
- Easy open cap for one hand operation.
- Lanyard hole, e.g. to attach the INKZALL™ highlighters to the belt.
- Anti-Roll design won't roll off surfaces.

| | Description | Colour | Tip | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----|--|--------|-----------|------------------|---------------------|----------------|--------------|
| 1 | INKZALL™ marker* | Black | 1mm | 1 | 36 | 48223100 | 045242319473 |
| 2 | INKZALL™ marker* | Red | 1mm | 1 | 36 | 48223170 | 045242355259 |
| 3 | INKZALL™ marker with stylus | Black | 1 mm | 1 | 1 | 48223101 | 045242297436 |
| 4 | INKZALL™ fine tip markers | Black | 0.6 mm | 4 | 1 | 48223154 | 045242479764 |
| (5) | INKZALL™ colour market Blue, red, green and bla | | 1mm | 4 | 1 | 48223106 | 045242333585 |
| 6 | INKZALL™ chisel point marker | Black | 1- 4,8 mm | 1 | 1 | 48223103 | 045242333608 |

^{*} Orders are only possible in master cartons (contains 36 x 48223100). Minum order quantity is 36 pcs (= 1 master carton). Order quantities greater than 36 pcs are to be ordered in multiples of 36 pcs (i.e. 72, 108, 144, 180...).













INKZALL™ chisel tip markers



- Marker continues to write after 72+ hours of cap off time.
- Can be used on wet, oily, dusty, rusty, with debris surfaces.
- For use on concrete, wood, metal, plywood, OSB, plastic.
- Quick dry time reduced smearing markings on PVC, metal surfaces.
- Easier to read from a distance due to the increased chisel tip sizes.

| Description | Colour | Tip | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|--------|---------|------------------|---------------------|----------------|---------------|
| ① INKZALL™ black chisel tip marker L (3pc) | Black | 6.2 mm | 3 | 1 | 4932471554 | 4058546294533 |
| ② INKZALL™ black chisel tip marker L | Black | 6.2 mm | 12 | 1 | 4932471555 | 4058546294540 |
| ③ INKZALL™ red chisel tip marker L | Red | 6.2 mm | 12 | 1 | 4932471556 | 4058546294557 |
| (4) INKZALL™ blue chisel tip marker L | Blue | 6.2 mm | 12 | 1 | 4932471557 | 4058546294564 |
| (5) INKZALL™ black chisel tip marker XL (1 pack) | Black | 14.5 mm | 1 | 1 | 4932471558 | 4058546294571 |
| 6 INKZALL™ black chisel tip marker XL | Black | 14.5 mm | 12 | 1 | 4932471559 | 4058546294588 |
| (7) INKZALL™ red chisel tip marker XL | Red | 14.5 mm | 12 | 1 | 4932471560 | 4058546294595 |
| 8 NKZALL™ blue chisel tip marker XL | Blue | 14.5 mm | 12 | 1 | 4932471561 | 4058546294601 |
| | | | | | | |



















INKZALL™ liquid paint markers

- Valve action marker.
- Durable acrylic nib for the most demanding environmental conditions: surface temperature from -10° up to + 145°.
- Marks on dark surfaces where traditional markers would not be easily visible.
- Can be used on rough, dirty and greasy surfaces.
- For use on concrete, black pipe, aluminium, PVC, steel & stainless steel, rubber and tyres.
- 10 seconds dry time.
- Water and UV resistant markings.
- Permanent markers. Markings last up to 6 months.
- Metal barrel for construction site durability.
- Xylene-free paint.
- IMPORTANT: Shake the marker with the cap on. Remove the cap and carefully pump it up and down until ink flows into the nib.





| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|--------------|
| ① INKZALL™ liquid paint marker - white | 1 | 12 | 48223711 | 045242363360 |
| ② INKZALL™ liquid paint marker - yellow | 1 | 12 | 48223721 | 045242363377 |
| ③ INKZALL™ liquid paint marker - black | 1 | 12 | 48223731 | 045242363384 |

INKZALL™ highlighters

- Durable tip stays sharp longer.
- No smearing, doesn't bleed through.
- Non-toxic ink, ASTM D 4236 certification.
- Ideal for architectural drawings, labels, office paper.
- Anti-roll body design for better grip on smooth surfaces.
- Construction helmet clip: the INKZALL™ highlighters can be clipped to the helmet, trousers, overalls, etc.
- Lanyard hole, e.g. to attach the INKZALL™ highlighters to the belt.



2



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------------|------------------|---------------------|----------------|--------------|
| INKZALL™ highlighter - yellow | 5 | 1 | 48223201 | 045242482573 |
| (2) INKZALL™ highlighter - coloured | 5 | 1 | 48223206 | 045242482580 |

INKZALL™ fine tip pens

- Approx. 0.6 mm tip.
- Clog resistant.
- Main applications: marking of labels for electrical wires, adding comments to architect plans.

| Description | Colour | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---------------------|------------------|---------------------|----------------|--------------|
| ① INKZALL™ fine tip pens (4pc) - black | Black | 4 | 1 | 48223164 | 045242479818 |
| ② INKZALL™ fine tip pens (4pc) - coloured | Black, red and blue | 4 | 1 | 48223165 | 045242479825 |



FASTBACK™ flip utility knife

NEW

- One handed blade opening. User can flip open the blade with one hand for easy activation.
- Integrated gut hook. Allows users to make cuts without exposing the blade.
- Tool free blade change. Less down time in the field for blade changes.
- Wire stripper. Eliminates the need to look for another tool in user's bag.
- Thin body design. Tool is easily stored in user's pocket.
- Belt clip for easy storage.





| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|---------------|
| FASTBACK™ compact flip utility knife | 1 | 1 | 4932471356 | 4058546289843 |
| ② FASTBACK™ flip utility knife | 1 | 6 | 4932471357 | 4058546289850 |
| ③ FASTBACK™ flip utility knife with blade storage | 1 | 1 | 4932471358 | 4058546289867 |

FASTBACK™ folding knife

NEW

- Press and flip operation permits one-handed opening.
- Resharpenable stainless steel blade.
- Piercing tip allows controlled piercing and smooth cutting.
- Liner lock secures the blade in the open position.
- Lanyard hole.
- Wire form belt clip for quick access without fraying pockets.
- Compact size for carrying in the pocket.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------------|------------------|---------------------|----------------|--------------|
| FASTBACK [™] folding knife | 1 | 1 | 48221990 | 045242296842 |



Fixed blade knife

- The fixed blade knife is designed for optimal edge retention and durability.
- 4" (101mm) stainless steel blade, optimised to stay sharper longer.
- Full metal tang provides durability for tough cut.
- Ergonomic handle offers secure and comfortable grip.
- Lanyard hole for easy tethering.
- Durable moulded sheath with belt clip for fast access.







Hawkbill fixed blade knife

- The hawkbill fixed blade knife is ideal for stripping wire and cable.
- Stainless steel blade is optimised to stay sharper longer.
- Full metal tang provides durability for tough cuts.
- Large ergonomic handle designed for comfortable use with gloves.
- Lanyard hole for easy tethering.
- Durable molded sheath with belt clip for fast access.





| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|----------------------------|------------------|------------------------|----------------|---------------|--|
| Hawkbill fixed blade knife | 1 | 1 | 4932464829 | 4058546227746 | |

HARDLINE™ folding knives

- Premium D2 blade steel provides better corrosion resistance. High strength and wear resistance, stays sharp longer.
- Smooth / serrated 75mm blade and piercing tip. Ideal for tearing through material and tip allows controlled piercing.
- Flip opening with bearing system: can be opened with 2 hands only.
- Opening steel frame lock secures the blade in the open position.
- Glass filled nylon handle with stainless steel.
- Liner lock secures the blade in the open position.
- Lanyard hole.
- Reversible belt clip allows right or left handed carry.






| Description | Blade type | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------|------------------|---------------------|----------------|--------------|
| $ \textcircled{1} \ \ \overset{HARDLINE^{\mathrm{TM}}}{\mathrm{folding}} \ knife \ - \\ \mathrm{smooth} $ | Smooth | 1 | 1 | 48221994 | 045242477043 |
| ② HARDLINE™ folding knife - serrated | Serrated | 1 | 1 | 48221998 | 045242359165 |

HARDLINE™ fixed blade knife

- 5" (127mm) AUS-8 Steel blade allows the blade to hold its edge longer, reducing the user's need to sharpen.







Fixed blade utility knife

NEW

- Ready to use fixed blade for an easier an fastest access to the knife.
- Tool-free blade change: Saves time changing blades. Thumb-screw mechanism allows to change the blade quickly and without any extra tools.
- Blade storage holds up to 5 blades conveniently inside the handle.
- Tool lanyard hole for easy tethering.
- Heavy Duty: Durable full metal body.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------|------------------|---------------------|----------------|---------------|
| Fixed blade utility knife | 1 | 1 | 4932471361 | 4058546289898 |



Sliding utility knife

NEW

- Side blade activation: Reduces the risk of exposing the blade accidentally.
- Wire stripper: Eliminates the need for another tool in the users bag.
- Tool free blade change: Saves time changing blades.
- Blade storage: Magnetic holder for 5 blades.
- Heavy Duty: Full metal body with rubber overmould for increased comfort and reduced hand slippage.







| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----------------------|------------------|---------------------|----------------|---------------|--|
| Sliding utility knife | 1 | 6 | 4932471359 | 4058546289874 | |

Self-retracting safety knife

NEW

- Self-retract mechanism: Retracts blade when the button is released.
- Two blade positions allows user to control cutting depth.
- Blade storage holds up to 5 blades conveniently inside the handle.
- Tool-free blade change: Saves time changing blades. Thumb-screw mechanism allows to change the blade quickly and without any extra tools.
- Heavy Duty: Durable full metal body.
- Wire Stripper: Eliminates the need to look for another tool in users' bag. Cut up the wire up to Ø 5 mm².





| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------|------------------|---------------------|----------------|---------------|
| Self-retracting safety knife | 1 | 1 | 4932471360 | 4058546289881 |

General purpose utility blades

- Iron carbide deposited metal for longer lifetime.
- Optimised cutting angle geometry for sharpness.
- Extra ground cutting edge for cleaner cuts.
- Blades are protected and easily accessible from storage box.

| Description | Total length (mm) | Height (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|-------------------------|----------------|------------------|---------------------|----------------|--------------|
| General purpose utility knife blades | 62 | 19 | 50 | 1 | 48221950 | 045242344444 |
| C Kille blades | | | 5 | 1 | 48221905 | 045242268061 |
| ② Hook utility knife blades | 62 | 19 | 50 | 1 | 48221952 | 045242286980 |
| 3 Carton utility knife blades (rounded). | 62 | 19 | 5 | 1 | 48221934 | 045242286942 |



Snap knives

- Metal lock* for maximum durability and longer lifetime.
- Lock with a speed thread* that allows faster blade adjustment.
- Auto-lock slide** for faster blade adjustment.
- Snap-off cap pocket clip** snaps off blade segments.
- Overmolded handle offers a slip resistant grip and is an acetone resistant.
- Iron carbide blade for longer lifetime, increased sharpness and clean cut finish.



| Description | Blade width (mm) | No. blade points | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------|------------------|------------------|------------------|---------------------|----------------|--------------|
| 1 Snap knife 9 mm | 9 | 13 | 1 | 1 | 48221960 | 045242296811 |
| ② Snap knife 18 mm | 18 | 8 | 1 | 1 | 48221961 | 045242296798 |
| 3 Snap knife 25 mm | 25 | 7 | 1 | 1 | 48221962 | 045242296828 |

Snap blades

- Robust re-usable storage dispenser with easy access to blades.
- Optimized cutting angle geometry for sharpness and improved cutting precision.
- Iron carbide metal for longer life.
- Precise ground cutting edges for cleaner cuts.



| Description | Blade width (mm) | No. blade points | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------|------------------|------------------|------------------|---------------------|----------------|--------------|
| ① Snap blades 9 mm | 9 | 13 | 10 | 1 | 48229109 | 045242288649 |
| ② Snap blades 18 mm | 18 | 8 | 10 | 1 | 48229118 | 045242288656 |
| (3) Snap blades 25 mm | 25 | 7 | 10 | 1 | 48229125 | 045242288663 |

Safety cutter

- Reduced cut injuries thanks to the recessed blade preventing contact with fingers.
- Reduced damaged goods in boxes or packages.
- Dual hook design lasts twice as long as single blade cutters.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------|---------------------|----------------|--------------|
| Safety cutter | 1 | 1 | 48221916 | 045242495337 |



PVC saw

- All-metal handle design for best-in-class durability.
- Tool free blade change: up to 10x faster blade change.
- Overmold handle for increased comfort.
- Compact design.





| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------|------------------|---------------------|----------------|--------------|
| PVC saw | 1 | 1 | 48220212 | 045242467518 |
| PVC saw replacement blade | 1 | 1 | 48220222 | 045242467532 |

Compact hacksaw

- Tool free blade change for changing blades up to 10x faster.
- Compact design, ideal for versatile cutting in tight spaces.
- Adjustable blade length for easier flush cutting.
- Rubber overmould grip for increased comfort.
- Accepts 12" blades.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----------------|------------------|---------------------|----------------|--------------|--|
| Compact hacksaw | 1 | 1 | 48220012 | 045242204571 | |



Folding jab saw

- Tool free blade change: Change blades up to 10x faster.
- Folding blade: Easier and safer storage.
- Rubber overmould grip: Increased comfort.
- Accepts all Sawzall® blades for increased versatility.
- Supplied with 18 TPi, 150 mm blade.

| Description | Blade length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----------------|-------------------|------------------|---------------------|----------------|--------------|--|
| Folding jab saw | 150 | 1 | 1 | 48220305 | 045242204618 | |



Hacksaw

- Tough metal frame, supports higher tension (25,000 PSi / 250 lbs).
- Overmould handle ensures secure grip and user comfort.
- Internal blade storage for extra blades.
- Supplied with 12" / 24 Tpi blade.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------|------------------|---------------------|----------------|--------------|
| Hacksaw | 1 | 1 | 48220050 | 045242362226 |



Rasping jab saw

- 150 mm plaster / drywall blade: Extra strong thicker blade making it more resistant for plunge cuts.
- Coated for corrosion protection.
- Rubber overmould: Increased comfort and reduced hand slippage.
- Built in rasping holes: Allows user to rapidly expand holes or smooth rough edges.









| Description | Pack Min. o quantity quan | rder lity | Article Number | EAN Code | |
|-----------------|------------------------------|--------------|----------------|--------------|--|
| Rasping jab saw | 1 6 | | 48229304 | 045242480555 | |

Jobsite scissors

- Iron carbide cutting edge for maximum durability. Longer lifetime vs. stainless steel.
- Chrome plated blades for maximum rust protection.
- All metal core: Full metal handle construction to protect from drops and handle breakage.
- Bolt lock technology protects blades from loosening to ensure precise cutting.
- Large handle loops for use with gloves.
- Index finger groove for more comfort.
- Laser edged ruler markings on the blade allows to measure and cut in one go.
- Jobsite offset scissors with micro-serrated blades for maximum durability and better grip.
- Jobsite offset scissors with 60°-offset head allows to keep hand above cutting material.


| 1) | |
|----|--|
| | |
| | |
| 2 | |
| | |
| | |

| Description | Total length (mm) | Blade length (mm) | Weight (g) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------|-------------------------|-------------------------|---------------|------------------|---------------------|----------------|--------------|
| ① Straight scissors | 230 | 95 | 180 | 1 | 1 | 48224044 | 045242347483 |
| ② Offset scissors | 240 | 115 | 230 | 1 | 1 | 48224043 | 045242347476 |



Metal Aviation Snips

- Thumb and forefinger slots for increased comfort and less fatigue. Allows user to push through sheet metal with ease with less risk of cutting oneself.
- Serrated cutting edges prevent slippage when cutting.
- Less hand fatigue when cutting thicker materials. Design with compound leverage action.
- Torsion spring opens jaws automatically during cutting for faster cutting action and less fatigue work.
- Chrome plated rust protected forged blades for increased lifetime. Extra hardened to 65 HRC.
- Made from forged alloy steel for best durability Cr Steel.
- One hand locking mechanism.
- Flush slimline design for non-snagging in material.
- Triple cutting direction identification on the head, handle and by colour coded handle.
- Ergonomic and durable overmoulded grips add comfort and last longer.
- Aviation snips: For short, straight and shaped cuts. Ideal for narrow radius cuts and notch cuts.
- Offset snips: For long continuous straight or curved cuts. 45° offset keeps users hand away from the cutting material.
- Extra long aviation snips: For longer and straighter cuts in one go.





| Cutting direction | Total length (mm) | Edge length (mm) | Max. cutting capacity aluminium (mm) | Max. cutting capacity stainless steel (mm) | Weight (g) | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---|----------------------|---------------------|---|---|------------------|------------------|------------------------|----------------|--------------|--|
| 1 Aviation snips: For sh | ort, straight and s | haped cuts. Idea | I for narrow radi | us cuts and notch | cuts. | | | | | |
| Straight (yellow) | 260 | 31 | 1.0 | 0.6 | 430 | 1 | 1 | 48224530 | 045242503643 | |
| Right (green) | 260 | 31 | 1.0 | 0.6 | 430 | 1 | 1 | 48224520 | 045242503636 | |
| Left (red) | 260 | 31 | 1.0 | 0.6 | 430 | 1 | 1 | 48224510 | 045242503629 | |
| ② Offset snips: For long | continuous straig | ht or curved cuts | s. 45° offset keep | os users hand awa | ay from the cutt | ing material. | | | | |
| Straight (yellow) | 260 | 37 | 1.0 | 0.6 | 430 | 1 | 1 | 48224532 | 045242503674 | |
| Right (green) | 260 | 30 | 1.0 | 0.6 | 430 | 1 | 1 | 48224522 | 045242503667 | |
| Left (red) | 260 | 30 | 1.0 | 0.6 | 430 | 1 | 1 | 48224512 | 045242503650 | |
| ③ Extra long aviation sn | ips: For longer and | d straighter cuts | in one go. | | | | | | | |
| Straight (yellow) | 310 | 76 | 1.0 | 0.6 | 450 | 1 | 1 | 48224537 | 045242503681 | |
| Left (offset) | 290 | 63 | 1.0 | 0.6 | 450 | 1 | 1 | 48224538 | 045242503698 | |
| (4) Metal snips set (3pc 48224510, 48224530 | • | | | | | 3 | 1 | 48224533 | 045242503735 | |

Mini copper tubing cutters

- Proprietary adjustment mechanism.
- Chrome rollers for added durability and extended performance provide best in class rust protection.
- Easy grip knob allows faster adjustment and easier one handed use.
- Compact design to cut pipes in restricted areas.

| Description | Max. cutting capacity in copper pipe (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------------|---|------------------|------------------------|----------------|--------------|
| Mini copper tubing cutter 15 mm | 3 - 15 | 1 | 1 | 48229250 | 045242521210 |
| Mini copper tubing cutter 22 mm | 3 - 22 | 1 | 1 | 48229258 | 045242521258 |
| Mini copper tubing cutter 28 mm | 3 - 28 | 1 | 1 | 48229251 | 045242521227 |





Constant swing copper tubing cutters

- Constant swing copper tubing cutters are engineered for straighter, cleaner cuts.
- 4 roller design delivers accurate cuts and prevents walking.
- Chrome rollers for added durability and extended performance provide best in class rust protection.
- Smooth adjustment mechanism.
- On-board reamer enables fast, easy deburring.
- A spare wheel is integrated in the knob.







Tubing cutter blades

■ Replacement blades for tubing cutters.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| Tubing cutter blades for copper | 2 | 1 | 48224256 | 045242356256 |
| Tubing cutter blades for stainless steel | 4 | 1 | 4932464511 | 4058546224561 |



Reaming pen

- Provides easy deburring of copper tubing and PVC.
- All-metal design for durability through demanding jobsite use.
- Heat treated and black oxide coated blade for extended life.
- A slide resistant clip allows easy storage in the users pocket or tool bag for quick access.

| Descr | iption | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------|--------|------------------|---------------------|----------------|--------------|
| 1 Reami | ng pen | 1 | 1 | 48224255 | 045242356249 |



Plastic cutter

- Cuts PEX, PB, MDP, PE, plastic electrical conduits, pneumatic pipe, plastic overflow pipe, rubber hoses, silicon hoses up to Ø 25 mm.
- V-shaped blade allows quick and straight cuts; prevents crushing of material.
- Replaceable stainless steel blade.
- Robust construction: Metal core from the head to the handles for maximum lifetime.
- Grooves on the head allows stripping of couplings.
- Corrosion resistant head.
- One handed locking mechanism, tool remains closed while in pouch, spring loaded but easy opening.
- Ergonomic and durable overmoulded grips add comfort and last longer.

| Description | Max. capacity tube & pipe Ø (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------|--|------------------|---------------------|----------------|--------------|
| Plastic cutter | 25 | 1 | 1 | 48224202 | 045242343133 |
| Replaceable blade | | 1 | 1 | 48224203 | 045242343140 |





Ratcheting PVC cutter

- Durable stainless steel rust proof blade for more cuts.
- Comfortable handle adds working comfort.
- Quick blade release adds working speed.
- One-handed metal lock.
- Lanyard hole, improves working security.
- Blades are replaceable.
- Suitable for: PVC, CPVC, PEX, PP, PB, PVDF, PE.



| | Description | Max. capacity tube & pipe Ø (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----|----------------------------------|--|------------------|---------------------|----------------|---------------|
| | Ratcheting PVC cutter 42 mm | 42 | 1 | 1 | 4932464172 | 4058546221171 |
| (1) | Ratcheting PVC cutter 63 mm | 63 | 1 | 1 | 4932464173 | 4058546221188 |
| | Ratcheting PVC cutter blade 42 m | nm | 1 | 1 | 48224211 | 045242477012 |
| 2 | Ratcheting PVC cutter blade 63 m | nm | 1 | 1 | 48224216 | 045242477036 |



Cable cutter

- Best-in-class cut quality: Bevelled jaw heads for accurate, smooth cable shearing.
- Comfort grips: More comfortable than dipped plastic. Grips will not peel.
- Forged design: Tool durability in abusive environments.
- Rust protection: Black oxide finish protects from rust.



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------|------------------|---------------------|----------------|--------------|
| Cable cutter | 1 | 1 | 48226104 | 045242356140 |



Bolt cutters

- Forged steel blades for strong and durable cutting edge.
- Comfort grip handles will not peel or slide off.
- Blade adjustment screw ensures high performance and longer life.
- Lanyard holes.



| Description] | Blade width (mm) | Cutting capacity for HRC 31 materials [Max. Ø mm] | | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------|---------------------|--|---|------------------|------------------------|----------------|---------------|
| 14" bolt cutter | 13 | 8 | 5 | 1 | 1 | 4932464827 | 4058546227722 |
| 24" bolt cutter | 13 | 11 | 8 | 1 | 1 | 4932464826 | 4058546227715 |



Extendable bolt cutters

- \blacksquare POWERMOVE $^{\!\scriptscriptstyle{\mathsf{M}}}$ handles extend for easier cuts in tough applications.
- Forged steel blades for strong and durable cutting edge.
- Pivoting head for angle adjustment.
- Comfort grip handles will not peel or slide off.
- Lanyard holes.




| Description | Blade width (mm) | Cutting capacity for HRC 31 materials [Max. Ø mm] | Cutting capacity for HRC 48 materials [Max. Ø mm]] | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|--|------------------------|--|---|------------------|------------------------|----------------|---------------|--|
| 14" / 18" extendable bolt cutter | 13 | 8 | 5 | 1 | 1 | 4932464850 | 4058546227951 | |
| 24" / 30" extendable bolt cutter | 13 | 11 | 8 | 1 | 1 | 4932464851 | 4058546227968 | |




Tri-lobe screwdrivers

NEW

- Comfortable Tri-Lobe handle.
- Visible ID markings allows for quick tool identification.
- Landyard hole
- Magnetic Tips

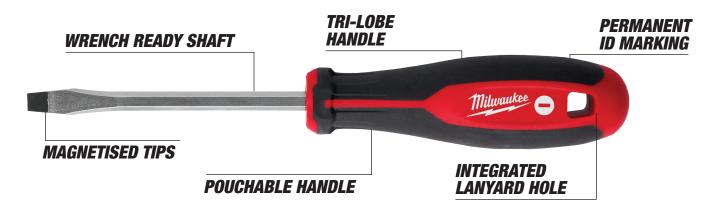

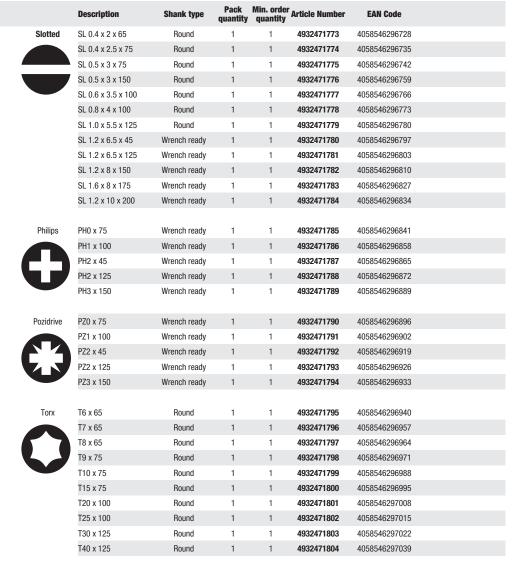









| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | | |
|--|------------------|------------------------|----------------|---------------|------|---|
| Tri-lobe screwdriver set 1 (6pc) PZ1 / PZ2 / SL3 / SL4 / SL5.5 / SL6.5 | 6 | 1 | 4932471806 | 4058546297053 | ① | 2 |
| 2 Tri-lobe screwdriver set 2 (6pc) PH1 / PH2 / SL3 / SL4 / SL5.5 / SL6.5 | 6 | 1 | 4932471807 | 4058546297060 | | |
| Tri-lobe screwdriver set 3 (10pc) ③ PZ1 / PZ2 / PH1 / PH2 / SL3 / SL5.5 / SL6.5 / SL6.5 / SL8 | 10 | 1 | 4932471808 | 4058546297077 | 3 | 4 |
| Tri-lobe screwdriver set 4 (12pc) (4) PZ0 / PZ1 / PZ2 / PH0 / PH1 / PH2 / SL2.5 / SL4 / SL5.5 / SL6.5 / SL6.5 / SL8 | 12 | 1 | 4932472003 | 4058546323998 | -0-0 | |
| Tri-lobe screwdriver Torx set (6pc) (5) T10 / T15 / T20 / T25 / T30 / T40 | 6 | 1 | 4932471809 | 4058546297084 | § | 6 |
| (a) Tri-lobe screwdriver stubby set (2pc) (b) PZ2 x 45mm / SL6.5 x 45mm | 2 | 1 | 4932471810 | 4058546297091 | | |

Tri-lobe demolition screwdriver

NEW

- Hammer ready strike caps
- All metal core
- Wrench ready shank
- Comfortable Tri-Lobe handle.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------------|------------------|---------------------|----------------|---------------|
| Tri-lobe demolition screwdriver set | 0 | 1 | 4932471872 | 4058546297718 |
| PH2 / SL7.9 mm | 2 | ļ | 49324/10/2 | 4030340297710 |



Demolition driver



- Hardened all metal core giving maximum shank durability.
- Multiple striking caps to give user more force when prying and chiseling.
- Duct piercing tip allows to pierce through sheet metal.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------|------------------|---------------------|----------------|---------------|
| Demo driver | 1 | 1 | 4932471871 | 4058546297701 |



Precision screwdrivers



- All metal core for improved durability.
- 360° Rotating back cap.
- Chrome plated shanks increase tool life by reducing corrosion.
- Durable case with robust zipper included to store tools.
- Longer shanks for improved visibility and extended reach.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------------------|------------------|---------------------|----------------|---------------|
| Precision screwdriver set (6pc) | 6 | 1 | 4932471869 | 4058546297688 |
| PH00 / PH0, SL1.6 / SL2 / SL3.2 / SL4 | U | ' | 4932471009 | 4030340297000 |
| Torx precision screwdriver (6pc) | 0 | | 4020474070 | 4050540007005 |
| T6, T7, T8, T8, T9, T10, T15 | 6 | 1 | 4932471870 | 4058546297695 |



8 in 1 compact ratcheting multi-bit screwdriver

NEW

- Full metal high torque ratchet for 2 x driving speed and control.Precision hardened bit tips: Durable driving tips for secure fitment and long life.
- Revolver style bit storage in handle.
- Chrome plated marine grade rust protected bits.



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| 8 in 1 compact ratceting multi-bit screwdriver | 1 | 1 | 4932471868 | 4058546297671 |
| PH1 / PH2 / PZ1 / PZ2 / TX15 / SL4.8 / SL6.4 | 1 | 1 | 4932471868 | 4030340297071 |



9 in 1 ratcheting multi-bit screwdriver

NEW

- Ergonomic 152 mm long screwdriver with 1/4" Hex nut driver (in reception) and built in loop maker.
- Full metal high torque ratchet for 2 x driving speed and control.
- 88 mm long power groove bits, power tool compatibility.
- Precision hardened bit tips: Durable driving tips for secure fitment and long life.
- Revolver style bit storage in handle.
- Chrome plated marine grade rust protected bits.



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---------------|---------------------|----------------|---------------|
| 9 in 1 ratchet multi-bit screwdriver - universal PH1 / PH2 / PZ1 / PZ2 / TX15 / TX20 / Slotted 0.8 x 5.5 mm | 1 | 12 | 4932471598 | 4058546294977 |
| 9 in 1 ratchet multi-bit screwdriver - hex Hex 1.5 mm / Hex 2 mm / Hex 2.5 mm / Hex 3 mm / Hex 4 mm / Hex 5 mm / Hex 6 mm | 1 | 12 | 4932471599 | 4058546294984 |

VDE Slim Screwdrivers

NEW


- VDE tested to 10, 000 V and guaranteed to 1,000 V.
- Premium quality steel with molydenum and vanadium for flexibility and lifetime.
- CNC milled tips for high precision for best fit and reduced cammout effect.
- Black phosphate on the tip for grip and corrosion resistance.
- Slim shank diameter for access to low lying screw applications
- 2 component grip with softgrip for comfortable handling.
- 3 sided design for non slip and maximum power transfer.
- Slim design at handle for low power/torque applications and fine electrical work.
- Laser engraved with the reception on the top of handle for easy identification.
- Anti roll, 3 sided collar on handle.

| Туре | Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------|---|------------------|---------------------|----------------|---------------|
| Slotted | SL 0.5 x 3 x 100 | 1 | 1 | 4932471445 | 4058546290733 |
| | SL 0.8 x 4 x 100 | 1 | 1 | 4932471446 | 4058546290740 |
| | SL 1.0 x 5.5 x 125 | 1 | 1 | 4932471447 | 4058546290757 |
| | | | | | |
| Philips | PH1 x 80 | 1 | 1 | 4932471448 | 4058546290764 |
| | PH2 x 100 | 1 | 1 | 4932471449 | 4058546290771 |
| Pozidrive | PZ1 x 80 | 1 | 1 | 4932471450 | 4058546290788 |
| | PZ2 x 100 | 1 | 1 | 4932471451 | 4058546290795 |
| 1 | VDE slim screwdriver set (5pc) SL3 / SL4 / SL5.5 / PZ1 / PZ2 | 1 | 1 | 4932471452 | 4058546290801 |
| 2 | VDE slim screwdriver set (7pc) SL3 / SL4 / SL 5.5 / PH1 / PH2 / PZ1 / PZ2 | 1 | 1 | 4932471453 | 4058546290818 |



1



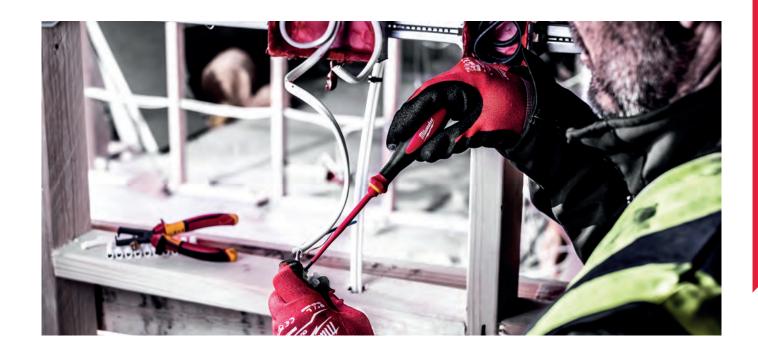

VDE screwdrivers

- VDE tested to 10, 000 V and guaranteed to 1,000 V.
- Premium quality steel with molydenum and vanadium for flexibility and lifetime.
- CNC milled tips for high precision for best fit and reduced cammout effect.
- \blacksquare Black phosphate on the tip for grip and corrosion resistance.
- 2 component grip with softgrip for comfortable handling.
- 3 sided design for non slip and maximum power transfer.
- Slim design at front for low power/torque applications and fine electrical work.
- Laser engraved with the reception on the top of handle for easy identification.
- Anti roll, 3 sided collar on handle.

| | Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------|--|------------------|---------------------|----------------|---------------|
| Slotted | SL 0.4 x 2.5 x 75 | 1 | 1 | 4932464034 | 4058546219796 |
| | SL 0.5 x 3 x 100 | 1 | 1 | 4932464035 | 4058546219802 |
| | SL 0.6 x 3.5 x 100 | 1 | 1 | 4932464036 | 4058546219819 |
| | SL 0.8 x 4 x 100 | 1 | 1 | 4932464037 | 4058546219826 |
| | SL 1.0 x 5.5 x 125 | 1 | 1 | 4932464038 | 4058546219833 |
| | SL 1.2 x 6.5 x 150 | 1 | 1 | 4932464039 | 4058546219840 |
| | SL 1.2 x 8 x 175 | 1 | 1 | 4932464040 | 4058546219857 |
| | SL 0.5 x 3 x 65 | 1 | 1 | 4932464041 | 4058546219864 |
| Philips | PH0 x 60 | 1 | 1 | 4932464042 | 4058546219871 |
| | PH1 x 80 | 1 | 1 | 4932464043 | 4058546219888 |
| | PH2 x 100 | 1 | 1 | 4932464044 | 4058546219895 |
| U | PH3 x 150 | 1 | 1 | 4932464045 | 4058546219901 |
| Pozidrive | PZ0 x 60 | 1 | 1 | 4932464046 | 4058546219918 |
| | PZ1 x 80 | 1 | 1 | 4932464047 | 4058546219925 |
| | PZ2 x 100 | 1 | 1 | 4932464048 | 4058546219932 |
| | PZ3 x 150 | 1 | 1 | 4932464049 | 4058546219949 |
| Torx | T10 x 60 | 1 | 1 | 4932464050 | 4058546219956 |
| | T15 x 75 | 1 | 1 | 4932464051 | 4058546219963 |
| 77 | T20 x 100 | 1 | 1 | 4932464052 | 4058546219970 |
| | T25 x 100 | 1 | 1 | 4932464053 | 4058546219987 |
| | T30 x 100 | 1 | 1 | 4932464054 | 4058546219994 |
| Philips / Slotted | PH/SL1 x 80 | 1 | 1 | 4932464055 | 4058546220006 |
| | PH/SL2 x 100 | 1 | 1 | 4932464056 | 4058546220013 |
| V | PZ/SL1 x 80 | 1 | 1 | 4932464057 | 4058546220020 |
| Pozidrive / Slotted | PZ2/SL2 x 100 | 1 | 1 | 4932464058 | 4058546220037 |
| Socket wrench | SW6 x 125 | 1 | 1 | 4932464059 | 4058546220044 |
| | SW7 x 125 | 1 | 1 | 4932464060 | 4058546220051 |
| | SW8 x 125 | 1 | 1 | 4932464061 | 4058546220068 |
| | SW9 x 125 | 1 | 1 | 4932464062 | 4058546220075 |
| | SW10 x 125 | 1 | 1 | 4932464063 | 4058546220082 |
| | SW11 x 125 | 1 | 1 | 4932464064 | 4058546220099 |
| | SW13 x 125 | 1 | 1 | 4932464065 | 4058546220105 |
| | VDE screwdriver set (5pc) | _ | | | |
| 1 | SL3 / SL4, PZ1 / PZ2 and voltage tester | 5 | 1 | 4932464066 | 4058546220112 |
| 2 | VDE Screwdriver set 1 (7pc) SL2.5 / SL3 / SL4, PH2, PZ1 / PZ2 and voltage tester | 7 | 1 | 4932464067 | 4058546220129 |
| | VDE Screwdriver set 2 (7pc) | | | | |

4932464068 4058546220136













2

SL2.5 / SL3 / SL4 / SL5.5, PH1 / PH2 and voltage tester

VDE pliers

- VDE (DIN EN/IEC 60900) certified tools. Tested to 10,000 volts and guaranteed to 1,000 volts. Tested against cold to -40°.
- Steel blades are fully forged , hardened and tempered for best durability . Grey titanium surface finish is non reflective and ensures maximum corrossion resistance.
- Induction hardened cutting edges to cut even the hardest of materials.
- Precision machined joint for maximum power transmission with optimum leverage for easy and effortless work.
- Ergonomic grip with softgrip for comfortable handling and good grip.



| Description | Total length (mm) | Cutting capacity in very hard wire 2300Nimm ² [Max. Ø mm] | Cutting capacity in hard wire 1800Nlmm ² [Max. Ø mm] | Cutting capacity in soft wire 220Nlmm ² [Max. Ø mm] | Cutting capacity in cable Al and Cu [Max. Ø mm] | Capacity [mm] | Capacity pipe [Max. Ø mm] | Weight (g) | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|--|-------------------------|--|--|--|--|------------------|---------------------------------|------------|------------------|------------------------|----------------|---------------|--|
| VDE cable | 160 | - | - | - | 16 | - | - | 185 | 1 | 1 | 4932464562 | 4058546225070 | |
| ① cutter | 210 | - | - | - | 25 | - | - | 315 | 1 | 1 | 4932464563 | 4058546225087 | |
| ② VDE long round nose plier | 205 | - | 2.2 | 3.9 | - | - | - | 200 | 1 | 1 | 4932464564 | 4058546225094 | |
| VDE long 45 (3) deg. round nose pliers | 205 | - | 2.2 | 3.9 | - | - | - | 200 | 1 | 1 | 4932464565 | 4058546225100 | |
| | 145 | - | 1.7 | 5 | 8 | - | - | 160 | 1 | 1 | 4932464566 | 4058546225117 | |
| 4 VDE diagonal cutter | 160 | - | 2 | 6 | 11 | - | - | 210 | 1 | 1 | 4932464567 | 4058546225124 | |
| | 180 | - | 2.5 | 7 | 13 | - | - | 240 | 1 | 1 | 4932464568 | 4058546225131 | |
| VDE heavy | 180 | 2.2 | 2.6 | 7 | 13 | - | - | 250 | 1 | 1 | 4932464569 | 4058546225148 | |
| (5) duty diagonal cutter | 200 | 2.5 | 2.8 | 8 | 15 | - | - | 305 | 1 | 1 | 4932464570 | 4058546225155 | |
| VDE | 165 | - | 2 | 4 | 10 | - | - | 180 | 1 | 1 | 4932464571 | 4058546225162 | |
| 6 combination plier | 180 | - | 2.2 | 5.2 | 12 | - | - | 250 | 1 | 1 | 4932464572 | 4058546225179 | |
| VDE wire stripping plier | 160 | - | - | - | 0.75mm ² - 6mm ² | - | - | 180 | 1 | 1 | 4932464573 | 4058546225186 | |
| 8 VDE water pump plier | 240 | - | - | - | - | 50 | 50 | 395 | 1 | 1 | 4932464574 | 4058546225193 | |
| 9 VDE Plier Set (3 | pc) - Di | agonal cutter | (160 mm), lon | g nose plier | (205 mm), c | ombi plier | (180 mm) | 660 | 3 | 1 | 4932464575 | 4058546225209 | |



















Nipping pliers

- Iron carbide edge: Longer blade life.
- Comfort grips: More comfortable than dipped plastic. Grips will not peel.
- Smooth head: Will not mark surface during pull / pry applications.
- Forged design: Tool durability in abusive environments.
- Rust protection: Black oxide finish protect from rust.



| Description | Length (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------|-------------|------------------|---------------------|----------------|--------------|
| Nipping pliers | 180 | 1 | 1 | 48226407 | 045242356096 |



5 in 1 wire stripping pliers

- Wire stripper: Strips wire sizes 0.75 mm², 1.0 mm², 1.5 mm², 2.5 mm², 4.0 mm².
- Wire cutter: With curved laser hardened cutting edges.
- Plier: Suitable for gripping and bending cables.
- Deburrer: Deburring ribs on head for 12 25 mm pipe.
- Loop maker: Built in loop maker function for wire.
- One-handed swing lock: Easy one-handed use and remains locked while in pouch. Spring loaded for easy opening.
- Rust protection: Increases tool life by reducing corrosion.
- Forged alloy steel: For maximum tool strength and durability.



| Total length (mm) | Stripping capacities (mm²) | Cutting capacity in medium wire (mm) | | | | Deburring head max. Ø (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|----------------------------------|--|-----|-----|---|----------------------------------|------------------|------------------------|----------------|--------------|
| 190 | 0.75, 1.0, 1.5, 2.5, 4.0 | 2.5 | 2.5 | 6.0 | 4 | 25 | 1 | 1 | 48229079 | 045425212720 |

Heavy Duty Lineman's pliers

- For universal gripping, cutting applications.
- High leverage design: Long handles for maximum cutting power and leverage.
- Deburrer: Deburring ribs on head for up to 25 mm pipe. No need for extra tools.
- Nail pulle: Powerful gripping and high leverage.
- Laser hardened durable cutting edges: Cuts wire, bolts, screws and nails. Extra hardened jaws to 64 HRC.
- Serrated gripping zone for strong gripping and pulling.
- Made from Chrome Vanadium steel for best durability and good rust protection.
- Ergonomic and durable overmoulded grips add comfort and last longer.
- With crimping facility.





| Cut cap. in hard wire (mm) | Cutting capacity soft wire (mm) | Total length (mm) | Weight (g) | Deburring head max. Ø (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------|---------------------------------|----------------------|------------|-------------------------------|------------------|------------------------|----------------|--------------|
| 3.0 | 4.6 | 250 | 480 | 25 | 1 | 1 | 48226100 | 045242342228 |

Long nose pliers

- Long nose pliers: Specially suitable for gripping, bending and adjusting in restricted areas.
- Wire cutter: Cuts wires up to 2.5 mm.
- Deburrer: Deburring ribs on head for up to 20 mm pipe. No need for extra tools.
- Nail puller
- Serrated jaws for better grip and excellent control.
- Laser hardened durable cutting edges. Extra hardened to 64 HRC.
- Made from Chrome Vanadium for best durability and good rust protection.
- Ergonomic and durable overmoulded grips add comfort and last longer.





| Total length (mm) | Cut cap. in hard wire (mm) | Cable diameter (mm) | Jaw length (mm) | Weight (g) | Deburring head max. Ø (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|----------------------------------|------------------------|--------------------|------------|-------------------------------|------------------|------------------------|----------------|--------------|
| 210 | 2.5 | 6.0 | 51 | 255 | 18 | 1 | 1 | 48226101 | 045242342211 |

Diagonal pliers

- For all around cutting use.
- Tip protection: Tips are off set ground to protect cutting edges from damage when dropped.
- High leverage design: Long handles for maximum cutting power and leverage.
- Deburrer: Deburring ribs on head for up to 25 mm pipe. No need for extra tools.
- 15° offset head allows flush cutting, can be used as a nail puller for easier and quicker prying and pulling.
- Laser hardened durable cutting edges. Extra hardened to 64 HRC. Cuts wire, bolts, screws and nails.
- Made from forged alloy Chrome Vanadium steel for best durability and good rust protection.
- Ergonomic and durable overmoulded grips add comfort and last longer.



| Total length (mm) | Cut cap. in hard wire (mm) | Cutting capacity soft wire (mm) | Jaw length (mm) | Weight (g) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------|-------------------------------|---------------------------------|-----------------|------------|------------------|------------------------|----------------|--------------|
| 160 | 2.5 | 4.0 | 22 | 195 | 1 | 1 | 48226106 | 045242342181 |
| 180 | 3.0 | 4.0 | 26 | 246 | 1 | 1 | 48226107 | 045242342198 |

Quick adjust water pump pliers

- For gripping, fastening and holding work pieces.
- One hand push button adjustment for fast and firm grip.
- Fine scale adjustment positions for precise grip. Less downtime and more efficiency.
- Self locking button for fast and firm adjustment.
- V-groove jaws with profile for firmer grip, more precise fit and reduced slipping. Special teeth hardening 60 HRC.
- Made from Nickel and Chrome forged alloy steel for best durability and good rust protection.
- Ergonomic and durable overmoulded grips add comfort and last longer.
- Deburring head and handle design. No need for extra tools.
- Available in 3 lengths for optimum leverage.
- Ergonomic slim design to allow access in confined areas.







| Total length (mm) | Total length (inch) | Max. nut size AF (mm) | Max. capacity tube & pipe Ø (mm) | Weight (g) | Deburring head max. Ø (mm) | Deburring handles max. Ø (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|------------------------|-----------------------------|---|------------|-------------------------------|-------------------------------------|------------------|------------------------|----------------|--------------|
| 200 | 8 | 30 | 32 | 250 | 38 | 25 | 1 | 1 | 48226208 | 045242342235 |
| 250 | 10 | 36 | 42 | 425 | 51 | 25 | 1 | 1 | 48226210 | 045242342242 |
| 300 | 12 | 50 | 60 | 660 | 70 | 25 | 1 | 1 | 48226212 | 045242342259 |

TORQUE LOCK™ locking pliers

- TORQUE LOCK™: Faster set up and easy release when clamping flat and round material. Extra force can be applied to the TORQUE LOCK™ screw for better and more secure grip. Can also be used for hanging / storage purposes.
- Hardened jaws: Better grip force on jobsite material.
- Rust protection: Chrome plated tool increases life by reducing corrosion.
- Lever release design: Traditional release lever for jobsite convenience.

| | Total length (mm) | Total length (inch) | Jaw type | Jaw capacity flat (mm) | Jaw opening capacity for pipe (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----|-------------------------|---------------------------|-------------------|------------------------------|--|------------------|------------------------|-------------------|---------------|
| 1 | 170 | 7 | MAXBITE™ | - | 38 | 1 | 1 | 4932471730 | 4058546296292 |
| 2 | 250 | 10 | MAXBITE™ | - | 50 | 1 | 1 | 4932471729 | 4058546296285 |
| 3 | 127 | 5 | curved | - | 26 | 1 | 1 | 48223422 | 045242358250 |
| 4 | 170 | 7 | curved | - | 38 | 1 | 1 | 4932471732 | 4058546296315 |
| (5) | 250 | 10 | curved | - | 51 | 1 | 1 | 4932471725 | 4058546296247 |
| 6 | 250 | 10 | flat | 30 | - | 1 | 1 | 4932471726 | 4058546296254 |
| 7 | 100 | 4 | flat long nose | 42 | - | 1 | 1 | 48223504 | 045242358281 |
| 8 | 150 | 6 | flat long nose | 52 | | 1 | 1 | 4932471731 | 4058546296308 |
| 9 | 230 | 9 | flat long nose | 76 | - | 1 | 1 | 4932471733 | 4058546296322 |




TORQUE LOCK™ locking C clamps

- TORQUE LOCK™: Faster set up and easy release when clamping flat and round materials for welding. Extra force can be applied to the TORQUE LOCK™ screw for better and more secure grip. Can also be used for hanging / storage purposes.
- Hardened jaws: Better grip force on jobsite material.
- Rust protection: Chrome plated tool increases life by reducing corrosion.
- Lever release design: Traditional release lever for jobsite convenience.





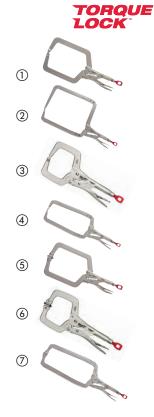

TORQUE LOCK™ seamer

- TORQUE LOCK™: Faster set up and easy release when clamping flat material. Extra force can be applied to the TORQUE LOCK™ screw for better and more secure grip. Can also be used for hanging / storage purposes.
- Hardened jaws: Better grip force on jobsite material.
- Rust protection: Chrome plated tool increases life by reducing corrosion.
- Lever release design: Traditional release lever for jobsite convenience.
- The seamer makes all kinds of bendings, forming, crimping tasks with ease.
- It is ideal for holding sheet metal parts.

| Description | Total length (mm) | Total length (inch) | Jaw capacity flat (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------|-------------------------|---------------------------|------------------------------|------------------|------------------------|----------------|---------------|
| TORQUE LOCK™ seamer | 200 | 8 | 42 | 1 | 1 | 4932471734 | 4058546296339 |



TORQUE LOCK™ chain wrench

- TORQUE LOCK™: Faster set up and easy release when clamping round material. Extra force can be applied to the TORQUE LOCK™ screw for better and more secure grip. Can also be used for hanging / storage purposes.
- Rust protection: Chrome plated tool increases life by reducing corrosion.
- Lever release design: Traditional release lever for jobsite convenience.
- Locking chain wrench holds and locks around any shape object.
- It adjusts quickly for ratchet action in either direction.

| Description | Total length (mm) | Total length (inch) | Jaw opening capacity for pipe (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|------------------------------|-------------------------|---------------------------|--|------------------|------------------------|----------------|--------------|--|
| TORQUE LOCK™ chain wrench | 270 | 9 | 79 | 1 | 1 | 48223542 | 045242472727 | |



MAX BITE™ combination spanner sets

- MAX BITE™ open-end grip reduces rounding and stripping.
- Rounded I-Beam handle for comfortable handling grip.
- Optimised storage, 7 pc set with carry handle. 15 pc set in tray for easy storage and connection to tool roller cabinet drawers.
- Ink-filled labels for better visibility.
- 15° offset box for better accesibility.
- Chrome alloy steel, chrome plated.

| | Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|---|------------------|---------------------|----------------|---------------|
| 1 | MAX BITE™ metric combination spanner set (7pc) 8, 10, 12, 13, 14, 15, 17 mm | 7 | 1 | 4932464257 | 4058546222024 |
| 2 | MAX BITE™ metric combination spanner set (15pc) 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 mm | 15 | 1 | 4932464258 | 4058546222031 |
| 3 | MAX BITE™ imperial combination spanner set (7pc) 3/8" 7/16" 1/2" 9/16" 5/8" 11/16" 3/4" | 7 | 1 | 48229407 | 045242499038 |
| 4 | MAX BITE™ imperial combination spanner set (15pc) 1/4″ 9/32″ 5/16″ 11/32″ 3/8″ 7/16″ 1/2″ 9/16″ 5/6″ 11/16″ 3/4″ 13/16″ 7/8″ 15/16″ 1″ | 15 | 1 | 48229415 | 045242499021 |







3



MAX BITE™ ratcheting combination spanner sets

- 144 Ratcheting teeth positions giving 2.5° arc swing allowing access in tighter spaces
- Durable double stacked pawls for longer ratchet life
- MAX BITE™ open-end grip reduces rounding and stripping
- Ink-filled labels for better visibility
- Chrome alloy steel, chrome plated
- Rounded I-Beam handle for comfortable handling grip

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|---------------|
| MAX BITE™ ratcheting metric combination spanner set (7pc) 8, 10, 12, 13, 14, 15, 17 mm | 7 | 1 | 4932464993 | 4058546229382 |
| MAX BITE™ ratcheting metric combination spanner set (15pc) ② 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 mm | 15 | 1 | 4932464994 | 4058546229399 |



1











Ratchet and socket sets

- 90 tooth design with 4 degrees of arc swing for tight work spaces.
- Comes with a removable inner tray perfectly designed to be stored.
- Sockets are stamped with measurements on the flat side for easy-to-read visibility.
- All metal design for maximum durabilty.
- FOUR FLAT™ sides on socket deter rolling.
- Slim profile head with flush direction lever offers better accessibility.

| | | | | | 76 | |
|---|------------------|---------------------|----------------|---------------|-----|--|
| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | | |
| 1 Metric 1/4" ratchet + socket set (28pc) Standard sockets: 5 mm, 5.5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm / Deep well sockets: 5 mm, 5.5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm | 28 | 1 | 4932464943 | 4058546228880 | ① | |
| (50pc) Metric & imperial '\'\'a" ratchet + socket set (50pc) Standard sockets: \(\frac{9}{2}z'', \frac{9}{16''}, \frac{7}{2}z'', \frac{1}{16''}, \frac{9}{2}z'', \frac{9}{16''}, \frac{1}{12}z'' \\ \[\frac{9}{8}z'', \frac{7}{16}z'', \frac{1}{2}z'', \frac{9}{16''}, \frac{5}{10}mm, 5.5 mm, 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm / Deep well socket: \(\frac{9}{2}z'', \frac{9}{16''}, \frac{7}{2}z'', \frac{1}{16''}, \frac{7}{2}z'', \frac{1}{16}z'', \frac{7}{2}z'', \frac{1}{16}z''', \frac{7}{2}z''', \frac{1}{16}z''', \frac{7}{2}z''', \frac{1}{16}z''', \frac{7}{2}z''', \frac{1}{16}z'''', \frac{7}{2}z''', \frac{7}{2}z''', \frac{7}{2}z''', \frac{7}{2}z'''', \frac{7}{2}z'''', \frac{7}{2}z'''', \frac{7}{2}z'''', \frac{7}{2}z''''', \frac{7}{2}z''''''''''', \frac{7}{2}z''''''''''''''''''''''''''''''''''' | 50 | 1 | 4932464944 | 4058546228897 | 3 | ###################################### |
| 3 Metric 3/s" ratchet + socket set (32pc) Standard sockets: 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm / Deep well sockets: 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm | 32 | 1 | 4932464945 | 4058546228903 | 4 | Milu Marif |
| 4 Metric & imperial %" ratchet + socket set (56pc) Standard sockets: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 1/5", 5/16", 6 mm, 7 mm, 8 mm, 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm / Deep well sockets: 1/4", 5/16", 5/16", 7/16", 1/5", 1/16", 9/4", 1/16", | 56 | 1 | 4932464946 | 4058546228910 | | Milwa And Mill And Sand |
| (3) Metric 1/2" ratchet + socket set (28pc) Standard sockets: 10 mm, 11 mm, 12 mm, 13 mm 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm, 20 mm, 21 mm, 22 mm, 23 mm, 24 mm / Deep well sockets: 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm, 18 mm, 19 mm / 3" extension, 5" extension & removable storage tray | 28 | 1 | 4932471864 | 4058546297633 | (5) | 111 de la constante de la cons |

Ratchets

- 90 tooth design with 4 degrees of arc swing for tight work spaces.
- Slim profile head with flush direction lever offers better accessibility.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------|------------------|---------------------|----------------|---------------|
| 1/4" drive ratchet | 1 | 1 | 48229014 | 045242513017 |
| 3/8" drive ratchet | 1 | 1 | 48229038 | 045242513024 |
| 1/2" drive ratchet | 1 | 1 | 4932471865 | 4058546297640 |





1/2 drive breaker bar

NEW

- Provides Extra leverage for tougher bolts.
- 180° swiveling head

| Description | Total length (mm) | Total length (inch) | Article Number | EAN Code |
|--|-------------------|---------------------|----------------|---------------|
| $\frac{1}{2}$ drive breaker drive (15) | 380 | 15 | 4932471866 | 4058546297657 |
| 1/2" drive breaker drive (24") | 610 | 24 | 4932471867 | 4058546297664 |



Tradesman 3/8" ratchet set

- Pivoting ratchet head.
- Slim profile design for better access.
- Square shaped sockets compatible with combination spaners.
- Organised and portable storage solution.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|--------------|
| Tradesman 3/8" ratchet set (12pc) | | | | |
| 3 /s" sockets: 10, 12, 13, 14, 15, 17, 18 and 19 mm. 3 /s" ratchet. 152 mm extension. 1 /s" to 1 /s" adaptor and 3 /s" to 1 /s" adaptor | 12 | 1 | 48229001 | 045242495078 |



Steel and aluminium pipe wrenches

- Overbite jaw for secure grip on pipes and fittings.
- Dual coil springs for maximum durability and tool life.
- Ergonomic handle for maximum comfort, won't dig into the palm.
- Hardened jaws for increased durability and better grip.
- Lanyard hole.

| Description | Total length (mm) | Total length (inch) | Jaw opening capacity for pipe (mm) | Jaw opening capacity for pipe (inch) | Weight (g) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------------|-------------------------|---------------------------|--|--|------------|------------------|------------------------|----------------|--------------|
| Aluminium pipe wrench 250 mm | 250 | 10 | 38 | 1.5 | 598 | 1 | 1 | 48227210 | 045242342372 |
| Aluminium pipe wrench 300 mm | 300 | 12 | 51 | 2 | 816 | 1 | 1 | 48227212 | 045242342389 |
| 1 Aluminium pipe wrench 350 mm | 350 | 14 | 51 | 2 | 1076 | 1 | 1 | 48227214 | 045242342396 |
| Aluminium pipe wrench 450 mm | 450 | 18 | 63 | 2.5 | 1630 | 1 | 1 | 48227218 | 045242342419 |
| Aluminium pipe wrench 600 mm | 600 | 24 | 76 | 3 | 2644 | 1 | 1 | 48227224 | 045242342426 |
| Steel pipe wrench 250 mm | 250 | 10 | 38 | 1.5 | 916 | 1 | 1 | 48227110 | 045242342334 |
| Steel pipe wrench 300 mm | 300 | 12 | 51 | 2 | 1270 | 1 | 1 | 48227112 | 045242342341 |
| Steel pipe wrench 350 mm | 350 | 14 | 51 | 2 | 1627 | 1 | 1 | 48227114 | 045242342358 |
| Steel pipe wrench 450 mm | 450 | 18 | 63 | 2.5 | 2531 | 1 | 1 | 48227118 | 045242342365 |







CHEATER - adaptable pipe wrench

- New-to-world 3 length design 10″/250 mm mode for tight spaces, 18″/450 mm mode for general purpose, 24″/600 mm mode for maximum leverage and reach.
- Overbite jaw for secure grip on pipes and fittings.
- Dual coil springs for maximum durability and tool life.
- Ergonomic handle for maximum comfort, won't dig into the palm.
- Ergonomic hook jaw design for easy detachment from the workpiece.
- Hardened jaws for increased durability and better grip.
- Lanyard hole.

| Description | Total length (mm) | Total length (inch) | Jaw opening capacity for pipe (mm) | Jaw opening capacity for pipe (inch) | Weight (g) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------|----------------------|------------------------|--|--|------------|------------------|------------------------|----------------|--------------|
| Adaptable pipe wrench | 250/450/600 | 10/18/24 | 63 | 2.5 | 3243 | 1 | 1 | 48227314 | 045242342402 |





Adjustable wrenches

- Precision adjustment screw with accurate threads and tight tolerances. The jaws won't back off during use.
- Chrome plating for best-in-class rust protection and increased durability.
- Ergonomic rounded handle design for a comfortable fit in the hand and less pressure points on the palm.
- Slim head design for reaching into tight spaces.
- Parallel jaws won't slip or damage finish surfaces.
- Permanent lasered inch and mm markings for accurate adjustment.
- 8" adjustable wrench (48227508) has an extra wide jaw of 38 mm for increased jaw capacity in confined environments.
- Lanyard hole.



| | Total length (mm) | Total length (inch) | Jaw opening capacity for pipe (mm) | Jaw thickness (mm) | Tip thickness (mm) | Weight (g) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------|-------------------|------------------------|--|-----------------------|-----------------------|------------|------------------|------------------------|----------------|--------------|
| | 150 | 6 | 24.5 | 11.5 | 7,7 | 186 | 1 | 1 | 48227406 | 045242356225 |
| | 200 | 8 | 30 | 14 | 8,7 | 353 | 1 | 1 | 48227408 | 045242356218 |
| <u> </u> | 200 | 8 | 40 | 14 | 8,1 | 385 | 1 | 1 | 48227508 | 045242356232 |
| 1) | 250 | 10 | 36.5 | 16 | 9,9 | 535 | 1 | 1 | 48227410 | 045242356201 |
| | 300 | 12 | 42.5 | 17 | 10,8 | 748 | 1 | 1 | 48227412 | 045242356195 |
| | 380 | 15 | 46 | 22 | 13,5 | 1,470 | 1 | 1 | 48227415 | 045242356188 |
| 2 | 150 mm (48227406) | + 250 mm (48 | 227410) | | | | 2 | 1 | 48227400 | 045242358823 |





Basin wrench

- Ratchet-compatible design: Accepts 3/8" ratchet.
- Hi-leverage design: Achieve break-away torque on stuck fasteners.
- Door-knob handle: More comfortable than square.
- Easy to adjust handle: Best-in-class adjustability.



| Description | Jaw size (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|---------------|------------------|---------------------|----------------|--------------|
| Basin wrench compact | 10 - 32 | 1 | 1 | 48227001 | 045242366170 |
| Basin wrench | 32 - 65 | 1 | 1 | 48227002 | 045242366187 |



S Jaw pipe wrench

- Made of forged chrome vanadium steel and oil hardened for durability according to DIN 5234.
- Slim, S shaped 45° angled jaws for best reach in confined areas.
- Assymetric serrated induction hardened jaws for maximum grip.
- I beam handle design for maximum strength.



| Total length (mm) | Capacity pipe [Max. Ø mm] | Weight (g) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|------------------------------|------------|------------------|---------------------|----------------|---------------|
| 340 | 52 | 965 | 1 | 1 | 4932464576 | 4058546225216 |
| 450 | 67 | 1570 | 1 | 1 | 4932464577 | 4058546225223 |
| 550 | 83 | 3000 | 1 | 1 | 4932464578 | 4058546225230 |

HOLLOWCORE™ magnetic nut drivers

- HOLLOWCORE™ unlimited depth in long bolts and threaded rod applications (patent pending).
- Magnetic retention driver heads for secure fitment in fastening applications.
- NEW TO WORLD universal driver head fits 4 x more fasteners square, 12 point, 8 point, Hex.
- Removes rusted and stripped bolts.
- Colour coded ID markings allow for quick tool identification on jobsite.
- Wrench ready Hex shanks deliver additional leverage.
- Chrome plated for maximum durability.
- Forged steel shanks provide longer life and more durability.



| Siz | e (mm) | Colour code | For anchor thread size | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-----|--------|-------------|------------------------|------------------|---------------------|----------------|--------------|--|
| 1 | 5 | Black | - | 1 | 1 | 48222531 | 045242294428 | |
| 2 | 5.5 | Brown | M3 | 1 | 1 | 48222532 | 045242294435 | |
| 3 | 6 | Red | M3.5 | 1 | 1 | 48222533 | 045242294442 | |
| 4 | 7 | Orange | M4 | 1 | 1 | 48222534 | 045242294459 | |
| (5) | 8 | Yellow | M5 | 1 | 1 | 48222535 | 045242294466 | |
| 6 | 10 | Blue | M6 | 1 | 1 | 48222536 | 045242294473 | |
| 7 | 13 | Orange | M8 | 1 | 1 | 48222537 | 045242294480 | |



Fish tape

NEW

- High flexibility tape for easier feeding
- Thicker tape for better pushing
- Triple strand design, won't kink
- Low friction case for smooth pay out
- Square inner grip for easier winding

| | Description | Length (m) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----|-------------------------|------------|------------------|---------------------|----------------|---------------|
| | Steel fish tape 7.5m | 7.5 | 1 | 1 | 4932472120 | 4058546325169 |
| (1) | Steel fish tape 15m | 15 | 1 | 1 | 4932472121 | 4058546325176 |
| | Polyester fish tape 15m | 15 | 1 | 1 | 4932472118 | 4058546325145 |
| 2 | Polyester fish tape 30m | 30 | 1 | 1 | 4932472119 | 4058546325152 |





Hook & pick set

- All-metal core for more durability and rust protection.
- Chrome-plated shanks reduce corrosion and provide superior rust protection.
- Comfort grip handle and precision knurling increase tool control and user comfort.
- Supplied in an easy-access storage tray for long-term tool storage.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------|------------------|---------------------|----------------|--------------|
| Hook & pick set | 4 | 1 | 48229215 | 045242508105 |



Curved hammer

- Precise balance for better handling.
- Durable grip construction.
- I-Beam handle construction resists bending in prying applications.
- Curved claw hammer reduces damage when pulling nails.
- Magnetic nail starter for safer application.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------|------------------|---------------------|----------------|---------------|
| 20 oz /14" curved claw hammer | 1 | 1 | 4932464028 | 4058546219734 |



Pry bar set

- I-Beam design for up to 40% more prying strength.
- All-Metal Core for improved durability.
- Hammer-ready strike cap improves leverage when working in tight and tricky spaces.
- Comfortable Tri-Lobe Handles for better grip.
- All-chrome shafts for increased durability.
- Curved claw design reduces damage when pulling nails.

| Contents | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------|------------------|---------------------|----------------|--------------|
| 200mm - 300m - 450mm - 600mm | 1 | 1 | 48229214 | 045242508099 |







Locking Tool Lanyards

- Superior shock absorption gradually stop the tool if dropped.
- Double Locking Carabiner™ ensures a secure connection that cannot become loose or slip off accidently.
- Integrated Swivel™ prevents twists and tangles allowing increased mobility.
- Colour coded weight rating easy identification of lanyard weight capacity.
- High versatility lanyard accessories can be added to connect all tools to the lanyards.



| Description | Bearing force (kg) | Colour code | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|--------------------|-------------|---------------|---------------------|----------------|---------------|
| 1 4.5 kg locking tool lanyard | 4.5 | Red | 1 | 1 | 4932471351 | 4058546289799 |
| ② 4.5 kg QUICK-CONNECT™ locking tool lanyard | 4.5 | Red | 1 | 1 | 4932471429 | 4058546290573 |
| 3 6.8 kg locking tool lanyard | 6.8 | Black | 1 | 1 | 4932471352 | 4058546289805 |
| 4 15.8 kg locking tool lanyard | 15.8 | Grey | 1 | 1 | 4932471353 | 4058546289812 |









LANYARD ACCESSORIES

STAY SAFE. SECURE ANY TOOL.



EASILY CONNECTS

- Creates a secure attachment point
- Different connection system (self-adhering tape or rings)

HIGH VERSATILITY

- Possibility to connect tools with or without lanyard holes
- Allows fast tool swap



Tool Lanyard Accessories

NEW

| Description | Colour code | Bearing force (kg) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------|--------------------|---------------|---------------------|----------------|---------------|
| 2.2 kg Small Quick-Connect™ Accessory | White | 2.2 | 3 | 1 | 4932471430 | 4058546290580 |
| 2.2 kg D-Ring Web Attachment | White | 2.2 | 5 | 1 | 4932471431 | 4058546290597 |
| 3 3.6 m Self-Adhering Tape | - | - | 1 | 1 | 48228860 | 4058546290603 |
| ④ 38 mm Split Ring | - | 1 | 5 | 1 | 4932471433 | 4058546290610 |
| 5 50 mm Split Ring | - | 1 | 5 | 1 | 4932471434 | 4058546290627 |
| 6 Anchoring Strap - 1pc | Green | 22.7 | 1 | 1 | 4932472105 | 4058546325015 |

Wrist tool lanyard

- Secure and comfortable tools attachment on the wrist.
- Soft and adjustable strap fit all wrist size with a hook and loop closure.
- Hang loop to securely attach all kind of tools power tools, tapes, screwdrivers, etc.
- Wrist lanyard allows an easy access to tools in a thigh environment or in repetitive work.
- Colour coded weight rating easy identification of lanyard weight capacity.



| Description | Bearing force (kg) | Colour code | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|--------------------|-------------|------------------|---------------------|----------------|---------------|
| Wrist lanyard | 2.2 | White | 1 | 1 | 4932472107 | 4058546325039 |





CUT RESISTANCE GLOVES

- Designed to provide ultimate durability, all-day comfort and best in class for dexterity
- Reinforced palm due to a nitrile texture
- SMARTSWIPE™ palm and fingers
 allows the use of touch screen devices without removing gloves





SMARTSWIPE™



DEXTERITY



WINTER CUT RESISTANCE GLOVES

- Winter insulation will keep the hand warm while working in cold conditions
- Gloves fit comfortably after being worn for extended periods of time
- Dual layer for added warmth to keep hand from the cold environment







BREATHABILITY

Resistance to cut and abrasion

CUT LEVEL 1

Ideal for material handling and light constructions duty.

CUT LEVEL 3

Ideal for stripping wire or pipe threading and cutting.

CUT LEVEL 5

Double layer nitrile creates the ideal glove for handling sharp objects.







Cut resistance dipped gloves

| | Description | Colour code | Size | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----|--------------------|----------------|------|------------------|------------------------|-------------------|---------------|
| | | | М | 1 | 1 | 4932471416 | 4058546290443 |
| | | | IVI | 12 | 1 | 4932471614 | 4058546295134 |
| | | | | 1 | 1 | 4932471417 | 4058546290450 |
| | Cut level 1 dipped | 14/1-14 | L | 12 | 1 | 4932471615 | 4058546295141 |
| 1 | gloves | White | XL | 1 | 1 | 4932471418 | 4058546290467 |
| | | | ΛL | 12 | 1 | 4932471616 | 4058546295158 |
| | | | XXL | 1 | 1 | 4932471419 | 4058546290474 |
| | | | AAL | 12 | 1 | 4932471617 | 4058546295165 |
| | | | М | 1 | 1 | 4932471420 | 4058546290481 |
| | | | IVI | 12 | 1 | 4932471618 | 4058546295172 |
| | | | | 1 | 1 | 4932471421 | 4058546290498 |
| | Cut level 3 dipped | Diagle | L | 12 | 1 | 4932471619 | 4058546295189 |
| 2 | gloves | Black | XL | 1 | 1 | 4932471422 | 4058546290504 |
| | | | λL | 12 | 1 | 4932471620 | 4058546295196 |
| | | | VVI | 1 | 1 | 4932471423 | 4058546290511 |
| | | | XXL | 12 | 1 | 4932471621 | 4058546295202 |
| | | Red | М | 1 | 1 | 4932471424 | 4058546290528 |
| | | | IVI | 12 | 1 | 4932471622 | 4058546295219 |
| | | | L | 1 | 1 | 4932471425 | 4058546290535 |
| | Cut level 5 dipped | | | 12 | 1 | 4932471623 | 4058546295226 |
| 3 | gloves | nea | XL | 1 | 1 | 4932471426 | 4058546290542 |
| | | | λL | 12 | 1 | 4932471624 | 4058546295233 |
| | | | VVI | 1 | 1 | 4932471427 | 4058546290559 |
| | | | XXL | 12 | 1 | 4932471625 | 4058546295240 |
| | | | | 1 | 1 | 4932471343 | 4058546289713 |
| | | | М | 12 | 1 | 4932471606 | 4058546295059 |
| | | | | 1 | 1 | 4932471344 | 4058546289720 |
| | Winter cut level 1 | \A/laika | L | 12 | 1 | 4932471607 | 4058546295066 |
| 4) | dipped gloves | White | XL | 1 | 1 | 4932471345 | 4058546289737 |
| | | | ΛL | 12 | 1 | 4932471608 | 4058546295073 |
| | | | VVI | 1 | 1 | 4932471346 | 4058546289744 |
| | | | XXL | 12 | 1 | 4932471609 | 4058546295080 |
| | | | N.A. | 1 | 1 | 4932471347 | 4058546289751 |
| | | | М | 12 | 1 | 4932471610 | 4058546295097 |
| | | | | 1 | 1 | 4932471348 | 4058546289768 |
| Œ | Winter cut level 3 | Diac! | L | 12 | 1 | 4932471611 | 4058546295103 |
| (5) | dipped gloves | Black | V' | 1 | 1 | 4932471349 | 4058546289775 |
| | | | XL | 12 | 1 | 4932471612 | 4058546295110 |
| | | | \n." | 1 | 1 | 4932471350 | 4058546289782 |
| | | | XXL | 12 | 1 | 4932471613 | 4058546295127 |



CE certified for EN420 and EN388:2019 (3121A).



CE certification for EN420 and EN388:2016 (4343C).



CE certified for EN420 and EN388:2016(4X44E).



CE certified for EN420, EN388:2016 (11141A) and EN511 (01X).



CE certified for EN420, EN388:2016(2442C) and EN511 (02X).

Impact demolition gloves

NEW

- Impact resistant material, on back of hand and fingers, to reduce and absorb shock.
- ARMORTEX[™] reinforced palms and finger tips: Increased durability and hand protection.
- Superior palm grip on oily and wet surfaces.
- European Certified for cut resistance protection including impact testing: EN420 and EN388:2016 (2121XP).



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|------------------|---------------------|----------------|---------------|
| Impact Demolition Gloves - M/8 - 1pc | 1 | 1 | 4932471908 | 4058546298074 |
| Impact Demolition Gloves - L/9 - 1pc | 1 | 1 | 4932471909 | 4058546298081 |
| Impact Demolition Gloves - XL/10 - 1pc | 1 | 1 | 4932471910 | 4058546298098 |
| Impact Demolition Gloves - XXL/11 - 1pc | 1 | 1 | 4932471911 | 4058546298104 |



Hybrid leather gloves

- Smartswipe™ Allows the use of touch screen devices without removing the gloves on the index finger knuckle.
- Leather on the palm for extended durability and reinforced protection of hands.
- Synthetic leather on back of the hand to offer more dexterity and breathability while working.
- Reinforced palm for added comfort and protection while handling heavy objects.
- European Certified for cut resistance protection: EN420 and EN388:2016.



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------------------------|------------------|---------------------|----------------|---------------|
| Hybrid Leather Gloves - M/8 - 1pc | 1 | 1 | 4932471912 | 4058546298111 |
| Hybrid Leather Gloves - L/9 - 1pc | 1 | 1 | 4932471913 | 4058546298128 |
| Hybrid Leather Gloves - XL/10 - 1pc | 1 | 1 | 4932471914 | 4058546298135 |
| Hybrid Leather Gloves - XXL/11 - 1pc | 1 | 1 | 4932471915 | 4058546298142 |



Demolition gloves

- Armortex® reinforced palms and finger tips: Increased durability and hand protection.
- SMARTSWIPE™ Knuckle: Capacitive knuckle allows to use touch screen devices without removing gloves or using dirty fingertips.
- Breathable tri-cot lining: Provides ultimate comfort and breathability.
- Knuckle protection: TPR pad provides knuckle protection.
- Terry cloth thumb: Built in sweat/brow wipe.
- Hook & Loop closure for secure fit.
- Fulfill the requirements of CE Category 2, EN 420 and EN 388 2221.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------|---------------------|----------------|--------------|
| Size 8 / M | 1 | 1 | 48229731 | 045242479436 |
| Size 9 / L | 1 | 1 | 48229732 | 045242479443 |
| Size 10 / XL | 1 | 1 | 48229733 | 045242479450 |
| Size 11 / XXL | 1 | 1 | 48229734 | 045242479467 |





Fingerless gloves

- Designed to provide ultimate dexterity when handling small objects.
- Reinforced palm and thumb seam.
- Lightweight, breathable backing.
- Moisture wicking lining provides all day comfort.
- Built-in sweat wipe.
- Hook & Loop closure for secure fit.
- Fulfil the requirements of CE Category 2, EN 420 and EN 388.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------|---------------------|----------------|--------------|
| Size 8 / M | 1 | 1 | 48229741 | 045242508730 |
| Size 9 / L | 1 | 1 | 48229742 | 045242508747 |
| Size 10 / XL | 1 | 1 | 48229743 | 045242508754 |
| Size 11 / XXL | 1 | 1 | 48229744 | 045242508761 |





FREE-FLEX work gloves

- SMARTSWIPE™ knuckle, palm and fingertips.
- Flexible and elastic gloves.
- Lightweight, breathable backing.
- Reinforced thumb seam.
- High dexterity finger tips.
- Built-in sweat wipe.
- Fulfill the requirements of CE Category 2, EN 420 and EN 388.


| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------|------------------|---------------------|----------------|--------------|
| Size 8 / M | 1 | 1 | 48229711 | 045242508693 |
| Size 9 / L | 1 | 1 | 48229712 | 045242508709 |
| Size 10 / XL | 1 | 1 | 48229713 | 045242508716 |
| Size 11 / XXL | 1 | 1 | 48229714 | 045242508723 |







MILWAUKEE® NEW SAFETY GLASSES



ADVANCED PROTECTION.

ULTIMATE PERFORMANCE.



Fog-Free Lenses

*Performance and high performance safety glasses only.

High performance safety glasses with gasket

NEW



ALSO AVAILABLE IN TINTED LENSES FOR OUTDOOR WORK

INCLUDES A SOFT CASE

| | Lens colour | Packaging style | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------|-----------------|------------------|---------------------|-------------------|---------------|
| 1 | Clear | Blister | 1 | 1 | 4932471885 | 4058546297848 |
| 2 | Tinted | Blister | 1 | 1 | 4932471886 | 4058546297855 |



Performance safety glasses

NEW







- Durable anti-scratch lenses.
- Long lasting anti-fog lenses.
- Comfortable and flexible arms for extended comfort wear.
- Clear and tinted options offer eye protection whether working indoors or outdoors.



| | Lens colour | Packaging style | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------|-----------------|---------------|---------------------|----------------|---------------|
| 1 | Clear | Blister | 1 | 1 | 4932471883 | 4058546297824 |
| 2 | Tinted | Blister | 1 | 1 | 4932471884 | 4058546297831 |

Safety glasses





- Light weight for extended comfort while wearing.
- Fully adjustable and removable nose bridge to fit comfortably all face shapes.
- Comfortable and flexible arms for extended comfort wear.
- Clear and tinted options offer eye protection whether working indoors or outdoors.



| | Lens colour | Packaging style | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---|-------------|-----------------|---------------|---------------------|----------------|---------------|
| 1 | Clear | Polybag | 1 | 1 | 4932471881 | 4058546297800 |
| 2 | Tinted | Polybag | 1 | 1 | 4932471882 | 4058546297817 |



PACKOUT[™] MODULAR STORAGE SYSTEM

VERSATILE, DURABLE

The MILWAUKEE® PACKOUT™ modular storage system revolutionises tool transportation, organisation and storage. Designed to provide users with the ability to interchange and interlock a wide assortment of heavy duty tool boxes, organisers and storage totes in multiple different configurations.









PACKOUT™ trolley box

- Part of the PACKOUT™ modular storage system.
- Constructed with impact resistant polymers for jobsite durability.
- 113 kg weight capacity.
- Industrial grade extension handle.
- Oversized Ø 228 mm all terrain wheels.
- IP65 rated weather seal to keep out rain and jobsite debris.
- Metal reinforced corners.
- Metal reinforced locking point.
- Interior organiser tray.
- Mounting location for the ONE-KEY™ TICK ™.

| Description | Dimensions (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|--------------------|---------------|---------------------|----------------|---------------|
| PACKOUT™ trolley box | 560 x 410 x 480 | 1 | 1 | 4932464078 | 4058546220235 |



PACKOUT™ boxes

- Part of the PACKOUT™ modular storage system.
- Constructed with impact resistant polymers for jobsite durability.
- IP65 rated weather seal to keep out rain and jobsite debris.
- Metal reinforced corners.
- Metal reinforced locking point.
- Interior organiser trays.
- Mounting location for the ONE-KEY™ TICK ™.
- Metal reinforced top handle for easier carrying (only on the large box).

| Description | Dimensions (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------|-----------------|------------------|---------------------|----------------|---------------|
| PACKOUT™ large box | 560 x 410 x 290 | 1 | 1 | 4932464079 | 4058546220242 |
| ② PACKOUT™ box | 560 x 410 x 170 | 1 | 1 | 4932464080 | 4058546220259 |





PACKOUT™ 3 piece set

| Contents | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|------------------|---------------------|----------------|---------------|
| 1 x PACKOUT™ trolley box, 1 x PACKOUT™ large | 3 | 1 | 4932464244 | 4058546221898 |



PACKOUT™ organiser

- Part of the PACKOUT™ modular storage system.
- Constructed with impact resistant polymers for jobsite durability.
- The interior features 10 removable & mountable bins that can be mounted onto common jobsite materials for easy access.
- IP65 rated weather seal to keep out rain and jobsite debris.
- No-travel bins seals to prevent the bins contents from migrating between bins during transport.

| Description | Dimensions (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------|-----------------|------------------|---------------------|----------------|---------------|
| PACKOUT™ organiser | 500 x 380 x 120 | 1 | 1 | 4932464082 | 4058546220273 |



PACKOUT™ compact organiser

- Part of the PACKOUT™ modular storage system.
- Constructed with impact resistant polymers for jobsite durability.
- The interior features 5 removable & mountable bins that can be mounted onto common jobsite materials for easy access.
- IP65 rated weather seal to keep out rain and jobsite debris.
- No-travel bins seals to prevent the bins contents from migrating between bins during transport.

| Description | Dimensions (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------------|-----------------|------------------|---------------------|----------------|---------------|
| PACKOUT™ compact organiser | 250 x 380 x 120 | 1 | 1 | 4932464083 | 4058546220280 |



PACKOUT™ slim organiser

- Part of the PACKOUT™ modular storage system.
- Constructed with impact resistant polymers for jobsite durability.
- Interior features 2 large bins and 8 small bins. All bins contain dividers.
- No travel bin seals to prevent the bins contents from migrating between bins during transportation.
- IP 65 rated weather seal to keep out rain and jobsite debris.

| Description | Dimensions (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------|-----------------|------------------|------------------------|----------------|---------------|
| PACKOUT™ slim organiser | 500 x 380 x 65 | 1 | 1 | 4932471064 | 4058546286927 |



PACKOUT™ compact slim organiser

- Part of the PACKOUT[™] modular storage system.
- Constructed with impact resistant polymers for jobsite durability.
- Interior features 1 large bin and 4 small bins. All bins contain dividers.
- No travel bin seals to prevent the bins contents from migrating between bins during transportation.
- IP 65 rated weather seal to keep out rain and jobsite debris.

| Description | Dimensions (mm) | Min. order quantity | Pack quantity | Article Number | EAN Code |
|--|-----------------|------------------------|---------------|----------------|---------------|
| PACKOUT [™] compact slim organiser | 250 x 380 x 65 | 1 | 1 | 4932471065 | 4058546286934 |









PACKOUT™ flat trolley

NEW

- 113kg weight capacity.
- Durable casters to easily roll with heavy load on a jobsite.
- Includes 1 locking brake and 2 side locks to stop the trolley and easily connect the PACKOUT™ boxes and bags.
- Part of the PACKOUT™ modular storage system.

| Descrip | tion | Dimensions (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------|-----------------|-----------------|---------------|---------------------|----------------|---------------|
| PACKOU | T™ flat trolley | 610 x 480 x 190 | 1 | 6 | 4932471068 | 4058546286965 |



PACKOUT™ crate

NEW

- Versatile stacking options: vertical and horizontal.
- 22kg weight capacity.
- Large storage capacity for all kind of tools.
- \blacksquare Other PACKOUT $^{\!\scriptscriptstyle{\mathsf{M}}}$ products can be stack on top of the crate.
- Part of the PACKOUT™ modular storage system.

| Description | Dimensions (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------|-----------------|------------------|---------------------|----------------|---------------|
| PACKOUT™ crate | 450 x 390 x 250 | 1 | 1 | 4932471724 | 4058546296230 |



PACKOUT™ mounting plate

- Multiple mounting configurations
- Turn the PACKOUT™ into a stationary storage
- 45kg floor mounted weight capacity
- 22kg wall mounted weight capacity
- Connects to all Milwaukee PACKOUT™ modular storage
- Impact resistant polymer construction

| Description | Dimensions (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------------------|-----------------|------------------|---------------------|----------------|---------------|
| PACKOUT [™] mounting plate | 600 x 470 x 030 | 1 | 6 | 4932471638 | 4058546295370 |



PACKOUT™ tote toolbag

- Part of the PACKOUT™ modular storage system.
- 1680 ballistic material construction.
- Impact resistant molded base.
- All metal hardware.
- Durable overmolded handle.

| Description | Dimensions (mm) | No. of pockets | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------|-----------------|----------------|---------------|---------------------|----------------|---------------|
| 1) 25 cm tote toolbag | 250 x 280 x 320 | 28 | 1 | 1 | 4932464084 | 4058546220297 |
| 2 40 cm tote toolbag | 250 x 400 x 320 | 31 | 1 | 1 | 4932464085 | 4058546220303 |
| 3 50 cm tote toolbag | 250 x 500 x 320 | 32 | 1 | 1 | 4932464086 | 4058546220310 |







PACKOUT™ duffel bag

- Part of the PACKOUT™ modular storage system.
- Made from 1680 ballistic material for jobsite durability.
- Impact resistant polymer base protects contents from water and dirt.
- Cushioned shoulder strap, top and side handles for flexible carry.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-----------------------------|------------------|---------------------|----------------|---------------|
| ① 38 cm PACKOUT™ duffel bag | 1 | 1 | 4932471066 | 4058546286941 |
| ② 50 cm PACKOUT™ duffel bag | 1 | 1 | 4932471067 | 4058546286958 |





PACKOUT™ tech bag

- Part of the PACKOUT™ modular storage system.
- Made from 1680 ballistic material for jobsite durability.
- Impact resistant polymer base protects contents from water and dirt.
- 58 total pockets. Hardshell protected instrument pocket.
- Secure, protected storage for laptops and tablets.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------|---------------|---------------------|----------------|---------------|
| PACKOUT™ tech bag | 1 | 1 | 4932471130 | 4058546287580 |



PACKOUT™ backpack

- Part of the PACKOUT™ modular storage system.
- Made from 1680 ballistic material for jobsite durability.
- 48 total pockets. Hardshell protected instrument pocket.
- Impact resistant polymer base protects contents from water and dirt and also allows backpack to stand up.
- Extra back padding, chest strap, attachment strap for rolling bags and heavy duty harness for ultimate jobsite comfort.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-------------------|------------------|---------------------|----------------|---------------|--|
| PACKOUT™ backpack | 1 | 1 | 4932471131 | 4058546287597 | |



PACKOUT™ jobsite cooler

- Part of the PACKOUT™ modular storage system.
- Impact resistant polymer base protects contents from water and dirt and also allows backpack to stand up.
- Extra insulation keeps contants cold for up to 24 hours.
- Food grade leak proof liner.
- Shoulder strap for easy transport.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|-------------------------|------------------|---------------------|----------------|---------------|--|
| PACKOUT™ iobsite cooler | 1 | 1 | 4932471132 | 4058546287603 | |



PACKOUT™ foam inserts

NEW

- Fully customisable foam Insert allows you to fully customise your storage by cutting out custom pockets to securely store and protect your tools.
- Durable construction provides increased protection for tools.
- Optimised storage allow easy access to the tools.
- Ref. 4932471428: Designed to fit in two PACKOUT[™] boxes tool box (4932464080) & large tool box (4932464079).
- Ref. 4932464078: Designed to fit in the PACKOUT[™] trolley box (4932464078).

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------------------|------------------|---------------------|----------------|---------------|
| PACKOUT™ foam insert | 2 | 1 | 4932471428 | 4058546290566 |
| PACKOUT™ trolley foam insert | 1 | 1 | 4932471927 | 4058546298265 |











PACKOUT™ adaptor HD box

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------------------|------------------|---------------------|----------------|---------------|
| PACKOUT™ adaptor HD box | 1 | 1 | 4932464081 | 4058546220266 |



Ultimate jobsite backpack

- Constructed with 1680D Ballistic material and with rugged metal zippers to provide increased durability.
- Hard molded base allows backpack to stand up and reduces ingress of dirt and water.
- Adjustable chest strap and attachment strap for rolling bags.
- Padded and breathable load-bearing harness evenly distributes the weight for more comfort and jobsite performance.
- 48 total pockets including 2 hardshell pockets to protect electronics and equipment from impact.
- Backpack provides exceptional organisation.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------|------------------|---------------------|----------------|---------------|
| Ultimate jobsite backpack | 1 | 1 | 4932464833 | 4058546227784 |









Jobsite backpack

- Durable construction, made from 1680D ballistic nylon.
- Hard moulded base allows bag to stand-up and provides ultimate all-weather protection.
- Padded, breathable straps for ultimate comfort and jobsite performance.
- Large storage 35 pockets in total.
- Fold down front pocket for easier access and storage of larger items. Side water bottle pocket.
- Vertical tool wall maximises storage space while allowing for bulk storage space.
- Laptop pocket allows protected storage for laptops/tablets and personal goods.
- Exterior daisy chains allow clip on storage.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|------------------|------------------|---------------------|----------------|--------------|
| Jobsite backpack | 1 | 1 | 48228200 | 045242333943 |









Tradesman backpack

- Durable construction, made from 1680D ballistic nylon.
- Padded straps for more comfort and jobsite performance.
- Laptop pocket allows protected storage for laptops/tablets and personal goods.
- 18 organizer pockets allow variety of options.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--------------------|------------------|---------------------|----------------|---------------|
| Tradesman backpack | 1 | 1 | 4932464252 | 4058546221973 |



Low profile backpack

- Constructed with 1680D Ballistic material and with rugged metal zippers to provide increased durability.
- Reinforced base protects the packpack from being damaged by abusive jobsite conditions.
- Adjustable chest strap and attachment strap for rolling bags.
- Padded and breathable load-bearing harness evenly distributes the weight for more comfort and jobsite performance.
- 22 pockets including a padded electronic sleeve to provide ultimate organisation.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------------|------------------|---------------------|----------------|---------------|
| Low profile backpack | 1 | 1 | 4932464834 | 4058546227791 |



Jobsite cooler

- Constructed with 1680D Ballistic Material and with rugged metal zippers to provide increased durability.
- Specifically designed to be durable enough to withstand tough jobsite conditions.
- Cooler utilises double insulation and a food-grade leak proof liner to keep ice cold for 24 hours without leaking.
- Tape measure clip with a bottle opener provides ultimate versatility.
- Padded shoulder strap with metal hardware for ultimate durability.
- Tech pocket and dry storage compartment for storing tablets and electronic devices.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|----------------|------------------|---------------------|----------------|---------------|--|
| Jobsite cooler | 1 | 1 | 4932464835 | 4058546227807 | |



Electricians pouch

- Robust construction, made from 1680D ballistic nylon.
- Double stitched with stronger riveted seams.
- Integrated handle allows easy transport and provides an easy mounting point on common jobsite materials.
- Solid base allows bag to stand-up, even when fully loaded.
- Integrated belt loops allow bag to be worn on a tool belt.
- Center mounted metal D-rings allow bag to hang evenly from shoulder strap.
- Metal tape measure clip securely stores tape for easy access.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|--------------------|------------------|---------------------|----------------|--------------|--|
| Electricians pouch | 1 | 1 | 48228112 | 045242509157 | |



Contractor rig

- Robust construction, made from 1680D ballistic nylon.
- Double stitched with stronger riveted seams.
- Padded 4-point harness distributes weight for all day comfort.
- Padded, breathable belt for ultimate comfort and jobsite performance.
- Integrated handle allows easy transport of the pouch and provides easy mounting point on common jobsite materials.
- Metal suspender attachments allow suspenders to be added.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|----------------|------------------|---------------------|----------------|--------------|
| Contractor rig | 1 | 1 | 48228120 | 045242333974 |



Padded rig

- Adjustable straps designed to fit all users.
- 1680D ballistic material construction.

| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------|------------------|---------------------|----------------|--------------|
| Padded rig | 1 | 1 | 48228145 | 045242358212 |



Work belt

- Metal hardware and 1680D ballistic nylon provide a lifetime of service.
- Up to 152 mm (6") of padding and can accomodate waist sizes up to 143 mm (53").



| Description | Pack quantity | Min. order quantity | Article Number | EAN Code |
|-------------|------------------|---------------------|----------------|--------------|
| Work belt | 1 | 1 | 48228140 | 045242358168 |

Transport cases

| Description | | | Metal/ Plastic | Pack quantity | Min. order quantity | Article Number | EAN Code |
|---------------------------------|---------------------------------|-------------------------------|----------------|------------------|---------------------|----------------|---------------|
| Transport case for hammers | K 90 | 0,K 950 | Plastic case | 1 | 1 | 4931375502 | 4002395752881 |
| Transport case for wall chasers | WCE 30,WCS 45, DME 30,DME 45 | MFE 1500,MFE 1305, MF 1900 | Metal case | 1 | 1 | 4932383357 | 4002395357390 |

HEAVY DUTY[™] boxes

■ Cases supplied wih latches and foam.

| HD Box Size | Dimensions (mm) | Pack quantity | Min. order quantity | Article Number | EAN Code |
|--|-------------------------------|------------------|---------------------|----------------|---------------|
| 1 | 475 x 358 x 132 | 1 | 1 | 4932453385 | 4002395146376 |
| 3 | 475 x 358 x 230 | 1 | 1 | 4932453386 | 4002395143634 |
| Accessories HD Box org | Accessories HD Box organisers | | 1 | 4932451545 | 4002395146581 |
| HD Box 1 universal - supplied with foam insert | | 1 | 1 | 4932459751 | 4058546029234 |
| HD Box 1 universal - wi foam insert | th FUEL logo - supplied with | 1 | 1 | 4932459206 | 4002395287215 |
| Spare latches | | 2 | 1 | 4932373252 | 4002395347247 |
| $PACKOUT^{\scriptscriptstyleTM}\ adaptor\ HD$ | box | 1 | 1 | 4932464081 | 4058546220266 |



Inserts for HEAVY DUTY™ boxes

| HD Box Insert | Pack quantity | Min. order quantity | Article Number | EAN Code | |
|---------------------------|------------------|---------------------|----------------|---------------|--|
| 1 | 1 | 1 | 4932440936 | 4002395147588 | |
| 3 | 1 | 1 | 4932453379 | 4002395148202 | |
| 8 | 1 | 1 | 4932453508 | 4002395146390 | |
| 9 | 1 | 1 | 4932453507 | 4002395143603 | |
| 10 | 1 | 1 | 4932453509 | 4002395143610 | |
| 11 | 1 | 1 | 4932453510 | 4002395143627 | |
| 12 | 1 | 1 | 4932453859 | 4002395275649 | |
| 13 | 1 | 1 | 4932453855 | 4002395275656 | |
| 14 | 1 | 1 | 4932453856 | 4002395275663 | |
| 15 | 1 | 1 | 4932453857 | 4002395275670 | |
| 16 | 1 | 1 | 4932453858 | 4002395275687 | |
| 17 | 1 | 1 | 4932453860 | 4002395275694 | |
| HD Box accessories insert | 1 | 1 | 4932451546 | 4002395146598 | |



| HD Box Insert | HD Box Size | Fits MILWAUKEE® kits | Article Number | EAN Code |
|--------------------------|-------------|--|----------------|---------------|
| 1 | 1 | M18 CDD-202X, M18 CPD-202X, M18 CDD-502X, M18 CPD-502X, M18 CIW12-502X, M18 CID-202X, M18 CID-502X | 4932440936 | 4002395147588 |
| 3 | 1 | M18 FDD-202X, M18 FDD-502X, M18 FPD-202X, M18 FPD-502X, M18 ONEPD-502X, M18 ONEDD-502X | 4932453379 | 4002395148202 |
| 8 | 1 | M18 CHIWF12-502X, M18 CHIWF34-502X, M18 CHIWP12-502X | 4932453508 | 4002395146390 |
| 9 | 1 | M18 CAG115X-502X, M18 CAG125X-502X, M18 CAG125XPD-502X | 4932453507 | 4002395143603 |
| 10 | 1 | M18 CRAD-502X | 4932453509 | 4002395143610 |
| 11 | 1 | M18 FIWF12-502X, M18 FID-502X, M18 ONEID-502X, M18 ONEIWP-502X, M18 ONEIWF-502X | 4932453510 | 4002395143627 |
| 12 | 3 | M18 CCS66-502X | 4932453859 | 4002395275649 |
| 13 | 3 | M18 CHX-502X | 4932453855 | 4002395275656 |
| 14 | 3 | M18 CHPX-502X | 4932453856 | 4002395275663 |
| 15 | 3 | M18 CSX-502X | 4932453857 | 4002395275670 |
| 16 | 3 | M18 CCS55-502X | 4932453858 | 4002395275687 |
| 17 | 3 | M18 CAG125XPDB-502X, M18 CAG115XPDB-502X | 4932453860 | 4002395275694 |
| HD Box accessories inser | t | | 4932451546 | 4002395146598 |

ACCESSORIES & HAND TOOLS MERCHANDISING SOLUTIONS

WHATEVER THE SPACE. WE HAVE THE SOLUTION...

MILWAUKEE® offers a comprehensive range of merchandising systems to ensure optimum display of our accessories and hand tools in store.





DISPLAY:

MINIBOX LEVEL

Article number: **4932459100**



DISPLAY:

SDS-PLUS MX4 DRILL BIT SET (7PC)

Article number: **4932352153**



DISPLAY:

INKZALL™ LIQUID PAINT MARKER - WHITE

Article number: 48223711



DISPLAY:

SHOCKWAVE™ IMPACT DUTY TORX BIT SET (32 PC)

Article number: **4932471586**

COUNTER DISPLAYS OFFER A FLEXIBLE SOLUTION AT POINT OF PURCHASE,

OR CAN BE PLACED ON THE BASE SHELVES OF THE WALL UNITS.





1M PEG WALLBAY

Article number:

4939434488

- Header with backlit MILWAUKEE® log with 3 downlighters and kick plate.
- Great for use in conjunction with MILWAUKEE® 1m rows and red racks, for a merchandising solution that is easy to implement straight from delivery.
- Height 223cm & depth 57cm.



DISPLAY:

LOW LEVEL GONDOLA

Article number:

4939434491

- Small header with MilLWUAKEE® vinyl logo.
- Great for use in conjunction with MILWAUKEE® 1m rows and red racks.
- Height 150cm & depth 58cm.



DISPLAY:

MILWAUEKEE® HEX BIN*

Article number:

4939435277

- Branded hexagonal cardboard bin ideal for display of handheld accessories.
- Height 110cm & width 50cm.



DISPLAY:

TAPE MEASURE TOWER'

Article number:

4939435226

• Height 191cm, width 70cm & depth 43cm.



DISPLAY:

LEVEL CAROUSEL*

TOP

BOTTOM

Article number: **493963870**

Article number: **4939638800**

- Must order both parts for complete carousel.
- Height 224cm, width 65cm & depth 65cm



DISPLAY:

MX4 ACCESSORIES COUNTER DISPLAY

Article number:

4939694400

• Height 55cm, width 45cm & depth 29cm



Grlica d.o.o. Hofbauerjeva ulica 2 3330 Mozirje

Telefon: 03 839 13 30 E-mail: info@grlica.si

www.Grlica.Si

Distributed by: